



DETAIL FOR TRENCH WITH PERFORATED PIPE

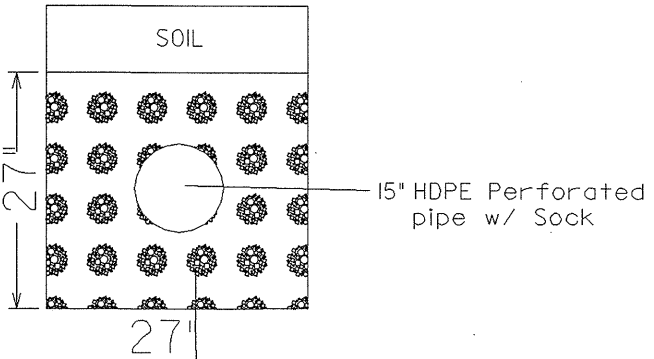

No. 57 Aggregate

C	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T	EARTH MATERIAL. (SHOULDER RECONSTRUCTION)
U	EXISTING PAVEMENT.

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

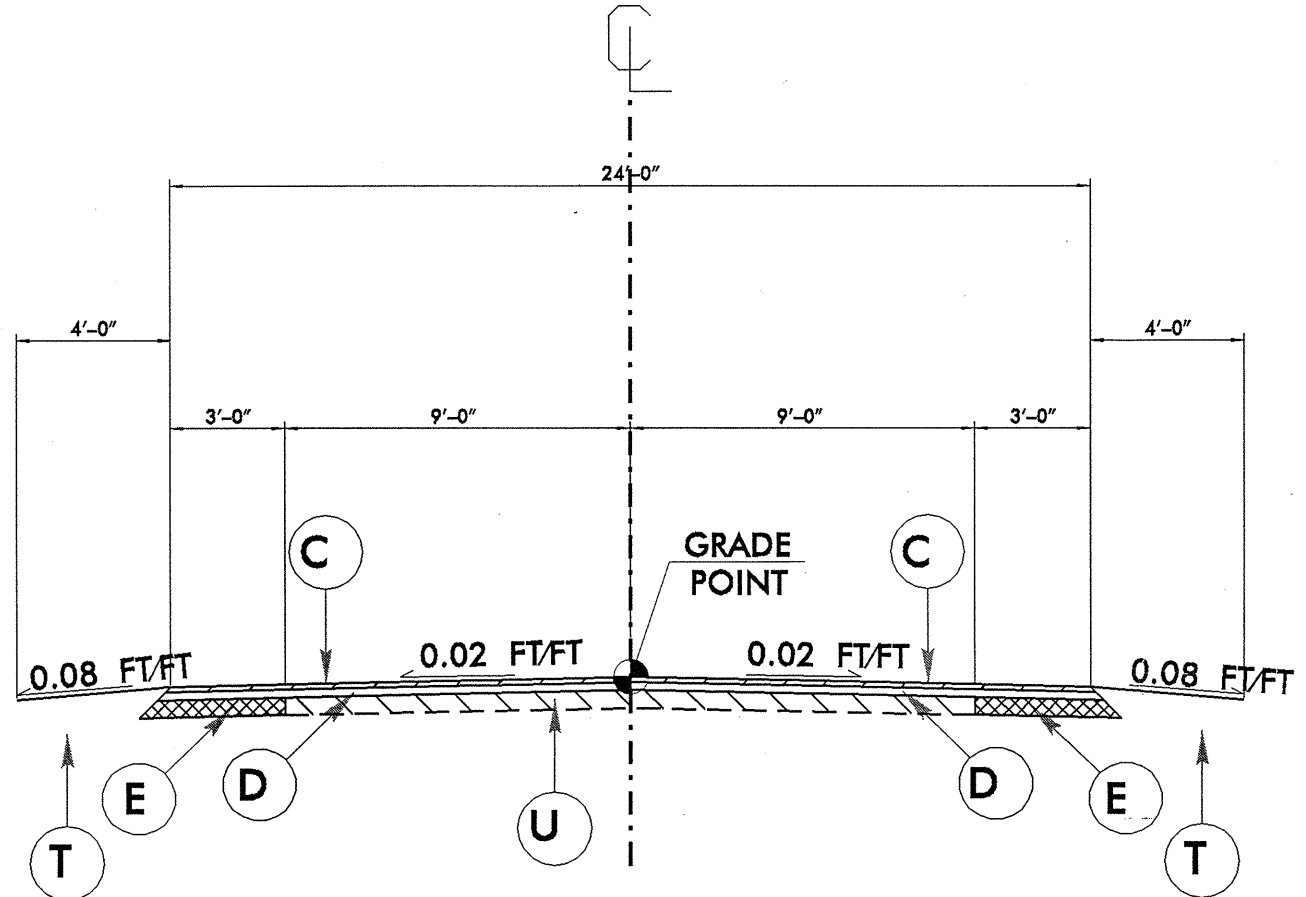

TYPICAL SECTION NO. 1

PROPOSED CONSTRUCTION SEQUENCE:

- 1) PERFORM PIPE REPLACEMENTS.
- 2) WIDEN ONE SIDE AT A TIME USING B25.0B UP TO ELEVATION OF EXISTING EDGE OF PAVEMENT
- 3) PLACE I19.0B ON FULL WIDTH AND APPLY TEMPORARY PAINT. CENTERLINE SHOULD BE RESTORED DAILY.
- 4) RECONSTRUCT SHOULDERS.
- 5) PLACE S9.5B AND APPLY THERMOPLASTIC PAVEMENT MARKINGS AND RAISED PAVEMENT MARKERS.