


6/16/04
 10-AUG-2004 15:49
 BWedeking AT 10196538

PAVEMENT SCHEDULE

C1	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.	E3	PROP. APPROX. 170 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 208.25 kg PER SQ. METER EACH IN TWO LAYERS.
C2	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS.	E4	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER.
C3	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER.	E5	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
C4	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.4 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 40 mm IN DEPTH OR GREATER THAN 80 mm IN DEPTH.	E6	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
C5	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.4 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 40 mm IN DEPTH OR GREATER THAN 80 mm IN DEPTH.	J1	PROP. 200 mm AGGREGATE BASE COURSE.
D1	PROP. APPROX. 100 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 245 kg PER SQ. METER	R1	750 mm CONCRETE CURB AND GUTTER.
D2	PROP. APPROX. 100 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 245 kg PER SQ. METER	R2	450 mm CONCRETE CURB AND GUTTER.
D3	PROP. APPROX. 75 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER	R3	125 mm MONOLITHIC CONCRETE ISLAND
D4	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 65 mm IN DEPTH OR GREATER THAN 110 mm IN DEPTH.	S	1.5m CONCRETE SIDEWALK.
D5	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 65 mm IN DEPTH OR GREATER THAN 110 mm IN DEPTH.	T	EARTH MATERIAL.
E1	PROP. APPROX. 100 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 245 kg PER SQ. METER.	U	EXISTING PAVEMENT.
E2	PROP. APPROX. 180 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 220.5 kg PER SQ. METER IN EACH OF TWO LAYERS	W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE STANDARD WEDGING DETAIL)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

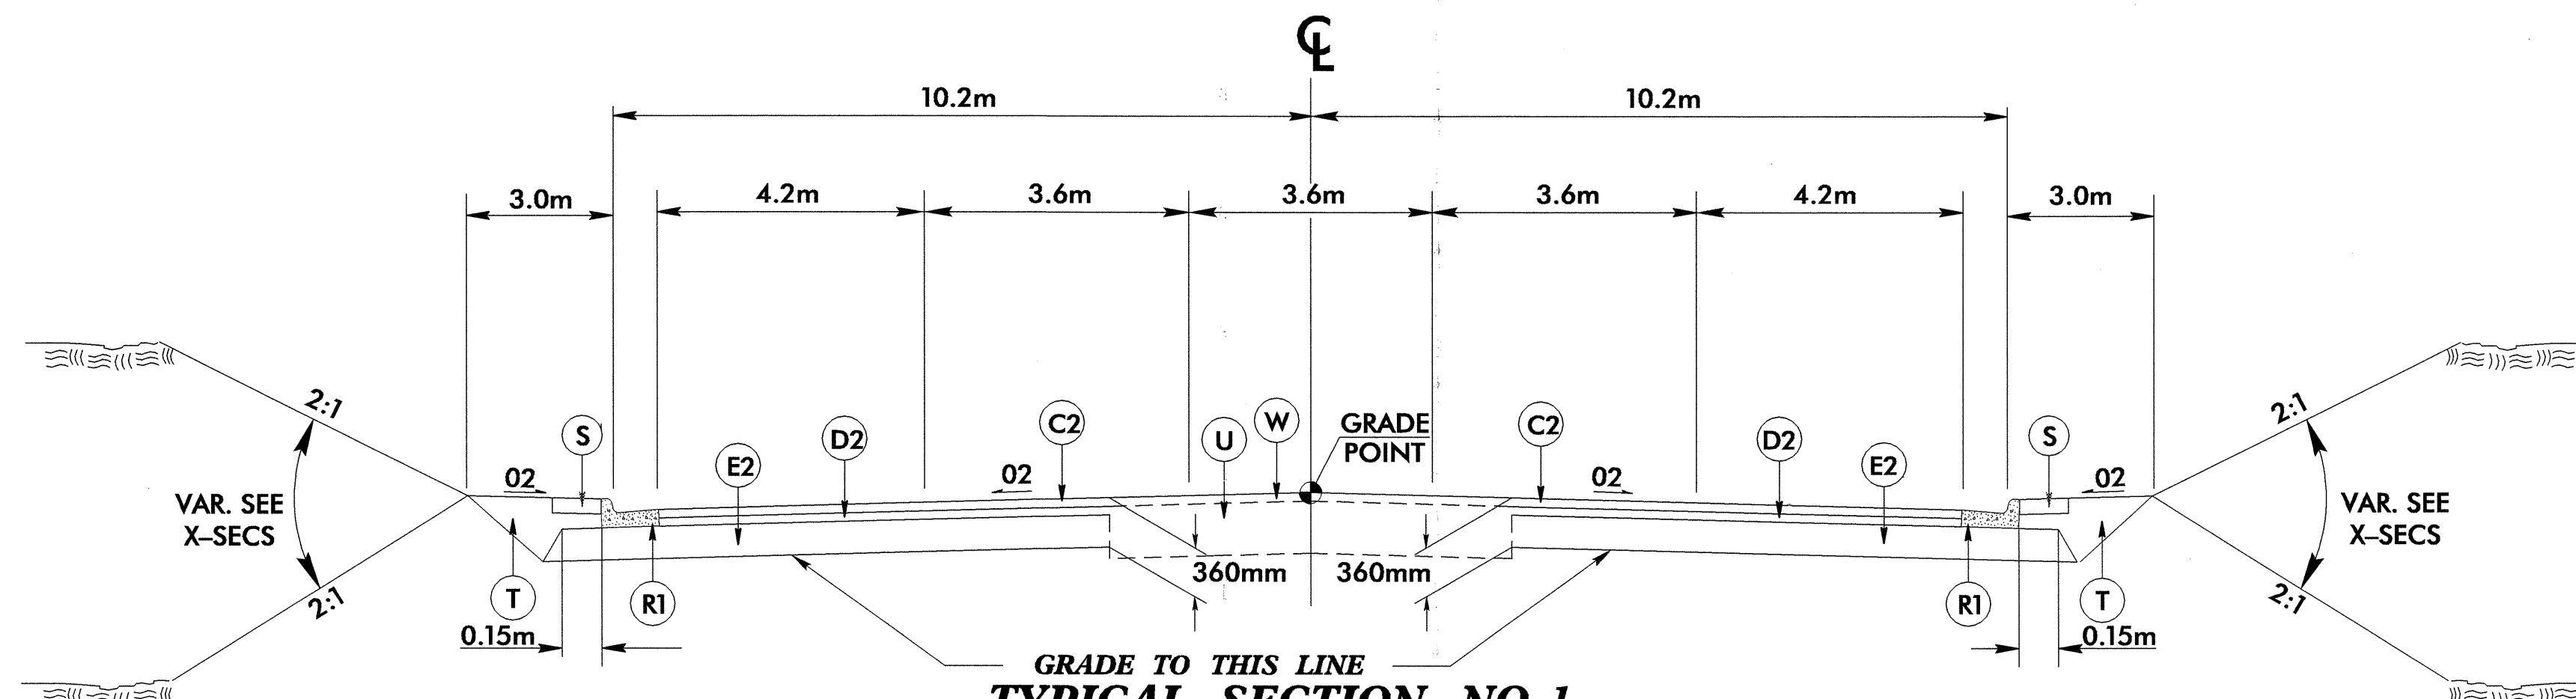

WIDENING & RESURFACING





USE TYPICAL SECTION NO. 1 AS FOLLOWS:

- L- 10+00.000 TO -L- 28+00.000
- L- 29+60.000 +/- TO -L- 37+20.000
- L- 38+20.000 +/- TO -L- 39+00.000

TYPICAL SECTION NO. 1C

USE TYPICAL SECTION NO. 1C IN CONJUNCTION WITH TYPICAL NO. 1


- L- 09+80 TO 10+73 +/-

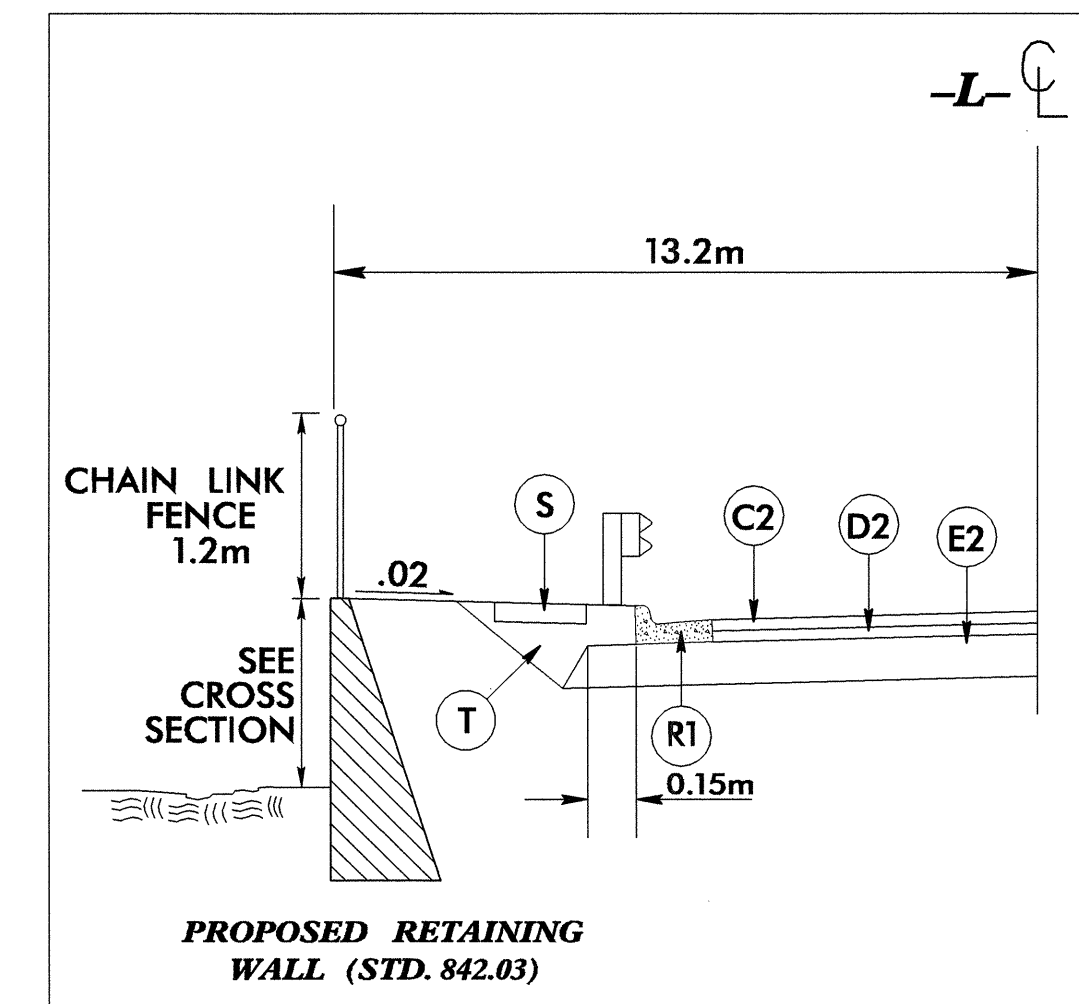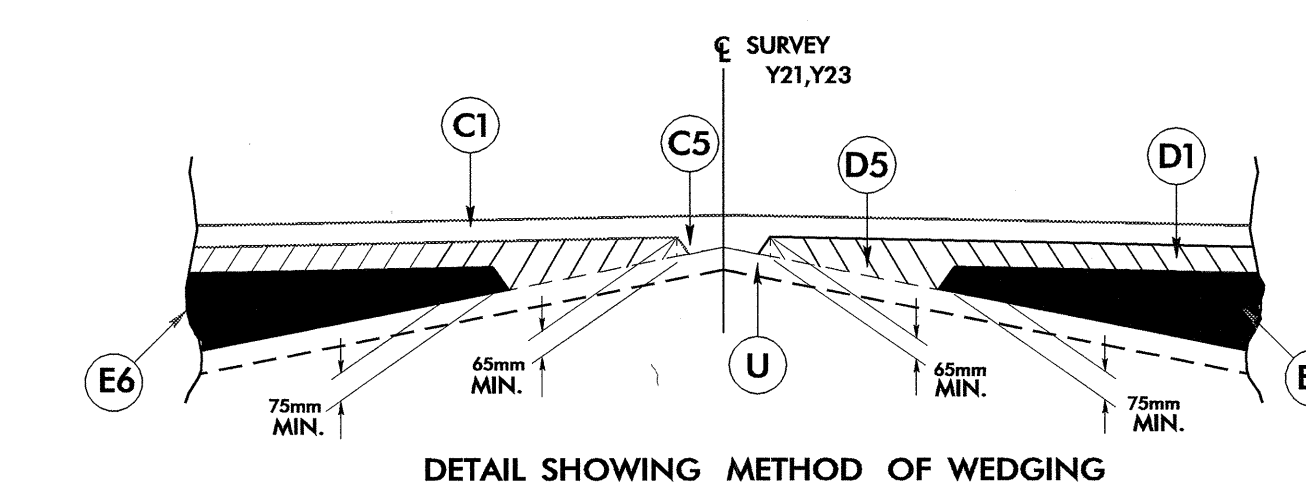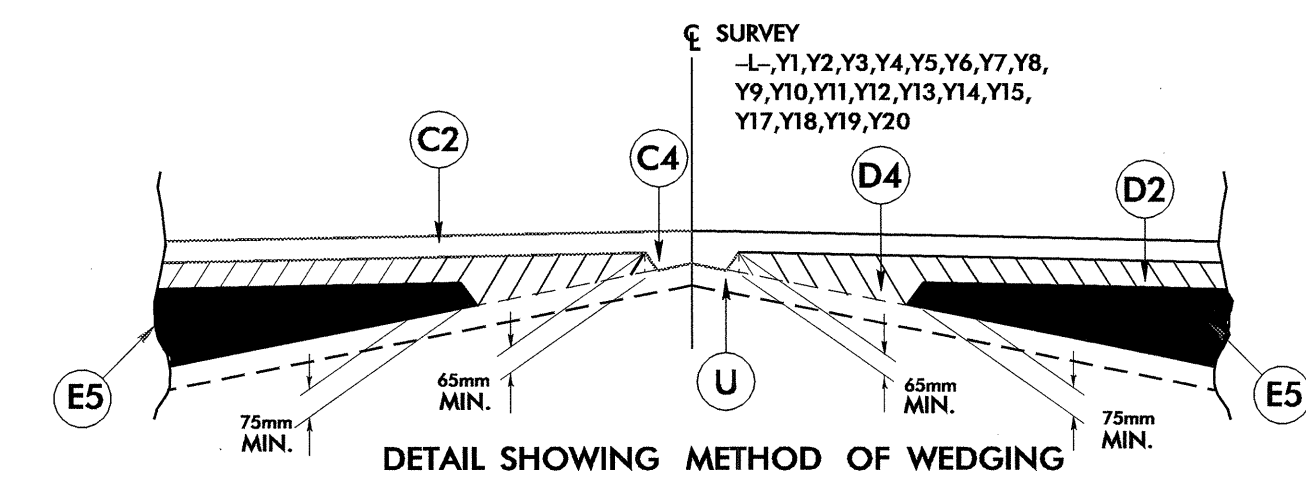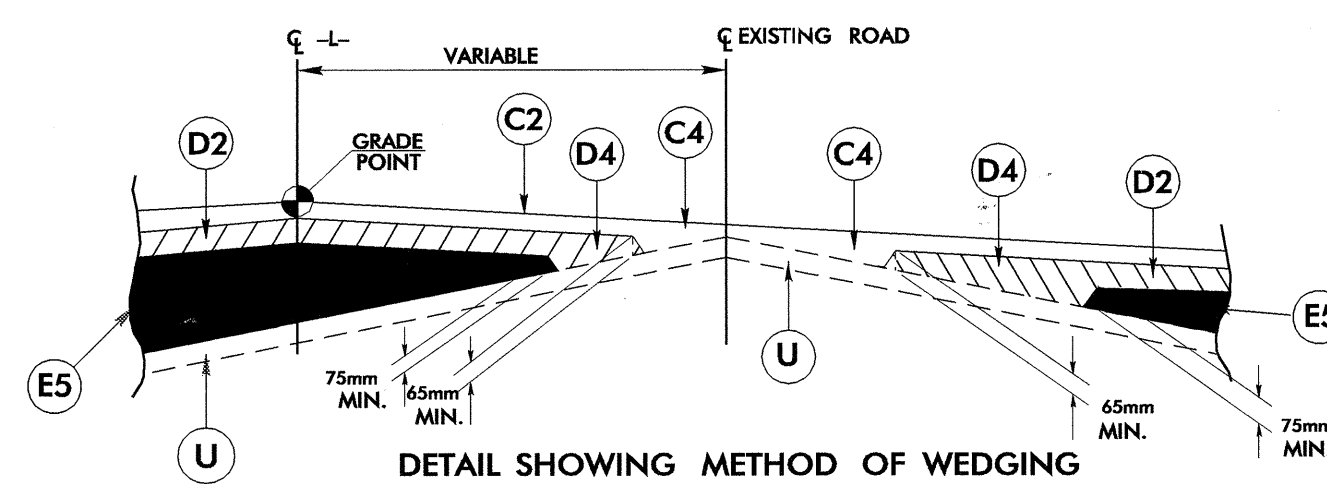

TYPICAL SECTION NO. 1A

USE TYPICAL SECTION NO. 1A IN CONJUNCTION WITH TYPICAL NO. 1

- L- 16+74 TO 17+27 LT.
- L- 11+40 TO -Y3- 10+22.5 RT. NOTE: SEE DETAIL (2-Y)

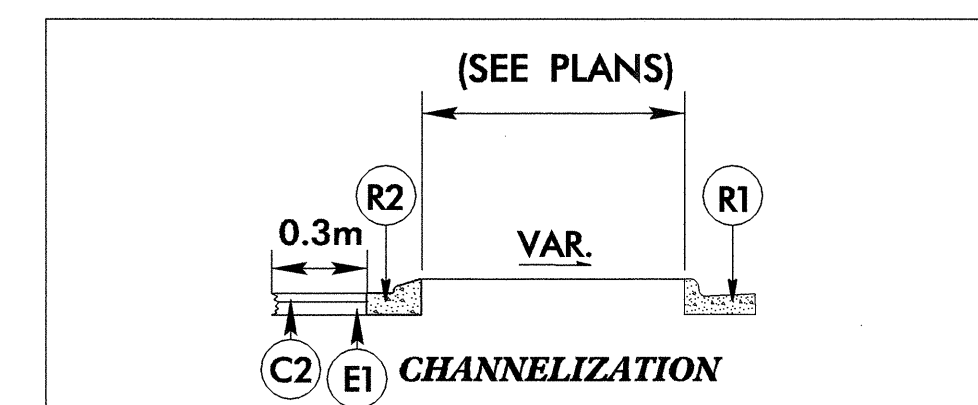

TYPICAL SECTION NO. 1B

USE TYPICAL SECTION NO. 1B IN CONJUNCTION WITH TYPICAL NO. 1

- L- 24+98.279 LT. TO -Y15- 11+37.187 RT.