

FLASHING YELLOW ARROW OVERLAP AND PROTECTED/PERMISSIVE SEQUENCE PROGRAMMING FOR OVERLAP A, B, C, G and H.

- From Main Menu select **4 - UNIT DATA**
- From UNIT DATA Submenu select **3 - OVERLAP DATA**

Use Up/Dn/Left/Right keys to position cursor on the desired Overlap. Use the NEXT key to select the overlap type. Press the ENT key and then program as per the Overlap screen(s) shown.

```
OVERLAP DATA
A: FYA  E: ---  I: ---  M: ---
B: FYA  F: ---  J: ---  N: ---
C: FYA  G: STD  K: ---  O: ---
D: ---  H: STD  L: ---  P: ---
PREV/NEXT TO CYCLE
```

OVERLAP A

Use Up/Dn/Left/Right keys to position cursor on Overlap 'A'. use the NEXT key to select 'FYA'. then press ENT

```
FYA OVERLAP - A      DELAY/10:  0
PHASES..12345678  90123456
PERM PHASES: 01000000 00000000
PROT PHASES: 10000000 00000000
-PED PHASES: 00000000 00000000
OVERLAPS..ABCDEFGH IJKLMNOP
PERM OVERLAPS: x0000000 00000000
PROT OVERLAPS: x0000000 00000000
```

NOTICE DELAY/10 = 0

Press ESC

OVERLAP B

Use Up/Dn/Left/Right keys to position cursor on Overlap 'B'. use the NEXT key to select 'FYA'. then press ENT

```
FYA OVERLAP - B      DELAY/10:  0
PHASES..12345678  90123456
PERM PHASES: 00010000 00000000
PROT PHASES: 10000000 00000000
-PED PHASES: 00000000 00000000
OVERLAPS..ABCDEFGH IJKLMNOP
PERM OVERLAPS: 0x000000 00000000
PROT OVERLAPS: 0x000000 00000000
```

NOTICE DELAY/10 = 0

Press ESC

OVERLAP C

Use Up/Dn/Left/Right keys to position cursor on Overlap 'C'. use the NEXT key to select 'FYA'. then press ENT

```
FYA OVERLAP - C      DELAY/10:  0
PHASES..12345678  90123456
PERM PHASES: 01000000 00000000
PROT PHASES: 00010000 00000000
-PED PHASES: 00000000 00000000
OVERLAPS..ABCDEFGH IJKLMNOP
PERM OVERLAPS: 00x000000 00000000
PROT OVERLAPS: 00x000000 00000000
```

NOTICE DELAY/10 = 0

Press ESC

OVERLAP G

Use Up/Dn/Left/Right keys to position cursor on Overlap 'G'. use the NEXT key to select 'STD'. then press ENT

```
OVERLAP - G      12345678 90123456
PARENTS: 10000000 00000000
+GRN PHASES: 00000000 00000000
-G/Y PHASES: 00000000 00000000
-PED PHASES: 00000000 00000000
TRAIL GREEN STANDARD:  0  YEL/10:  40
TRAIL GREEN PREEMPT:  0  RED/10:  20
```

Press ESC

OVERLAP H

Use Up/Dn/Left/Right keys to position cursor on Overlap 'H'. use the NEXT key to select 'STD'. then press ENT

```
OVERLAP - H      12345678 90123456
PARENTS: 00010000 00000000
+GRN PHASES: 00000000 00000000
-G/Y PHASES: 00000000 00000000
-PED PHASES: 00000000 00000000
TRAIL GREEN STANDARD:  0  YEL/10:  40
TRAIL GREEN PREEMPT:  0  RED/10:  20
```

END OVERLAP PROGRAMMING

LOAD SWITCH MAPPING DETAIL

- From Main Menu select **4 - UNIT DATA**
- From UNIT DATA Submenu select **9 - OUTPUT MAPPING**

USE ENTER AND NEXT KEYS TO MAP 'LDSW 4' AS 'OLG' AND 'LDSW' AS 'DLH'

OUTPUT MAPPING		EDIT MODE: LDSW	
		E-TOGGLE MODE	
LDSW	..1.. ..2.. ..3.. ..4.. ..5.. ..6.. ..7..		
RED PH1	PH2	PD2	OLG PH4 PD4 OLH
YEL	-	-	-
GRN	-	-	-
FIO	1	2	3 4 5 6 7
PREV/NEXT TO CYCLE		D-DISPLAY COMPAT	

LOAD SWITCH MAPPING COMPLETE

INIT & N.A. RESP PROGRAMMING DETAIL

- From Main Menu select **3 - PHASE DATA**
- From PHASE DATA Submenu select **4 - INIT & N.A RESP**


```
PHASE.....1...2...3...4...5...6...7...8
INITIAL  1  4  0  1  0  4  0  1
NA RESP  0  1  0  2  0  1  0  2

CODES....0....1....2....3....4....5...6
INITL NONE INACT RED  YEL  GRN  DRK G/DW
NA RSP NONE  NA1  NA2  1&2  ---  ---  ---
***
```

INIT & N.A. RESP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 05-2387T1
DESIGNED: May 2022
SEALED: 5-26-22
REVISED: N/A

Electrical Detail - Sheet 2 of 3 - Temp 1

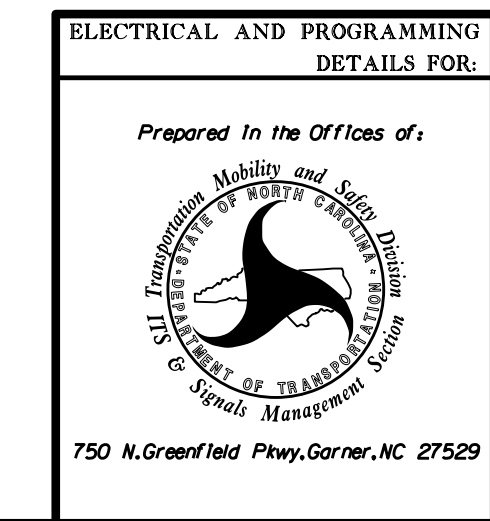

ELECTRICAL AND PROGRAMMING DETAILS FOR:		SR 2006 (Durant Road) at Capital Hills Drive	
Division 5	Wake County	Raleigh	
PLAN DATE: May 2022	REVIEWED BY:		
PREPARED BY: James Peterson	REVIEWED BY:		
REVISIONS	INIT.	DATE	

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

