


6/2/99



PROJECT REFERENCE NO. B-3470	SHEET NO. 2
ROADWAY DESIGN ENGINEER NORTH CAROLINA PROFESSIONAL SEAL 17691 RICHARD A. SHILLING 11-14-03	PAVEMENT DESIGN ENGINEER NORTH CAROLINA PROFESSIONAL SEAL 22896 CLARK S. MORRISON 12/17/03

PAVEMENT SCHEDULE FINAL DESIGN	
C1	PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD. IN EACH OF TWO LAYERS
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1.5" IN DEPTH.
D1	PROP. APPROX. 3.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1.0" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 2.25" IN DEPTH OR GREATER THAN 4.0" IN DEPTH.
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1.0" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3.0" IN DEPTH OR GREATER THAN 5.5" IN DEPTH.
R1	8"x18" CONCRETE CURB.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
W	WEDGING. (SEE WEDGING DETAIL)

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

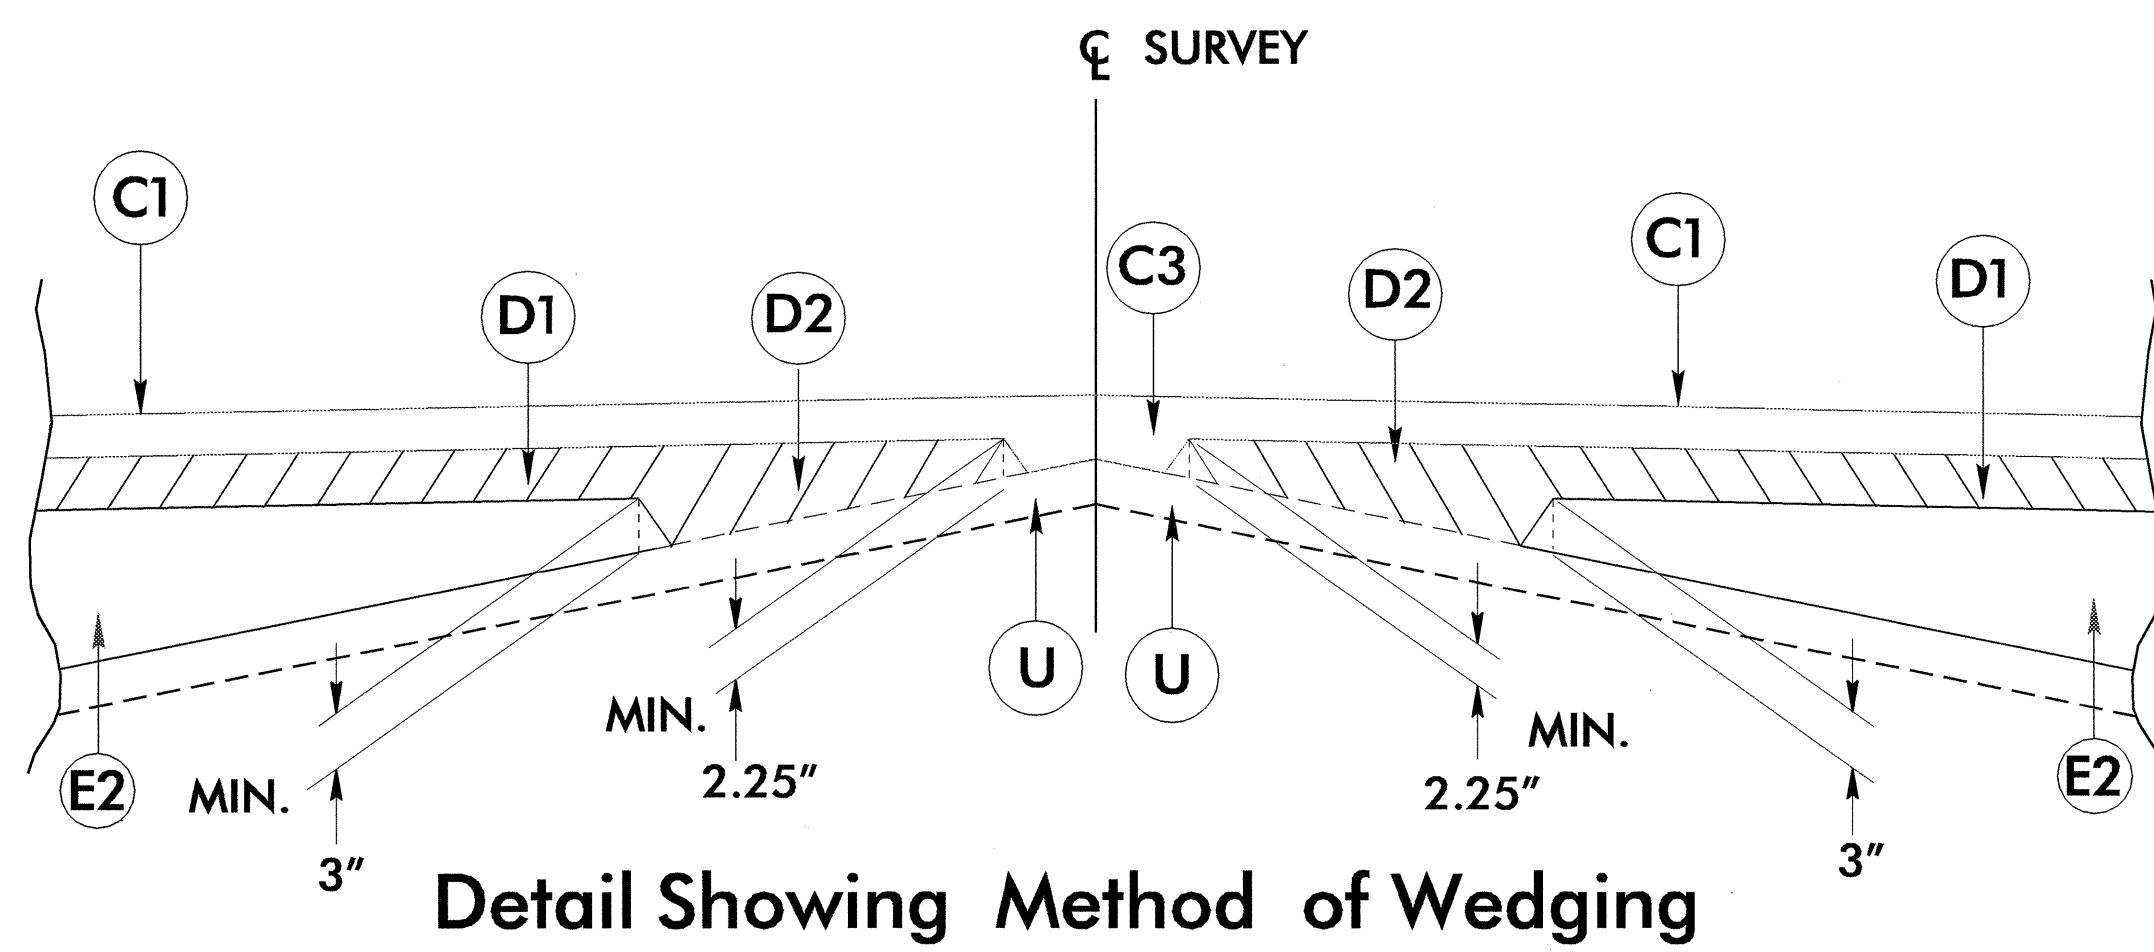


Detail Showing Method of Wedging

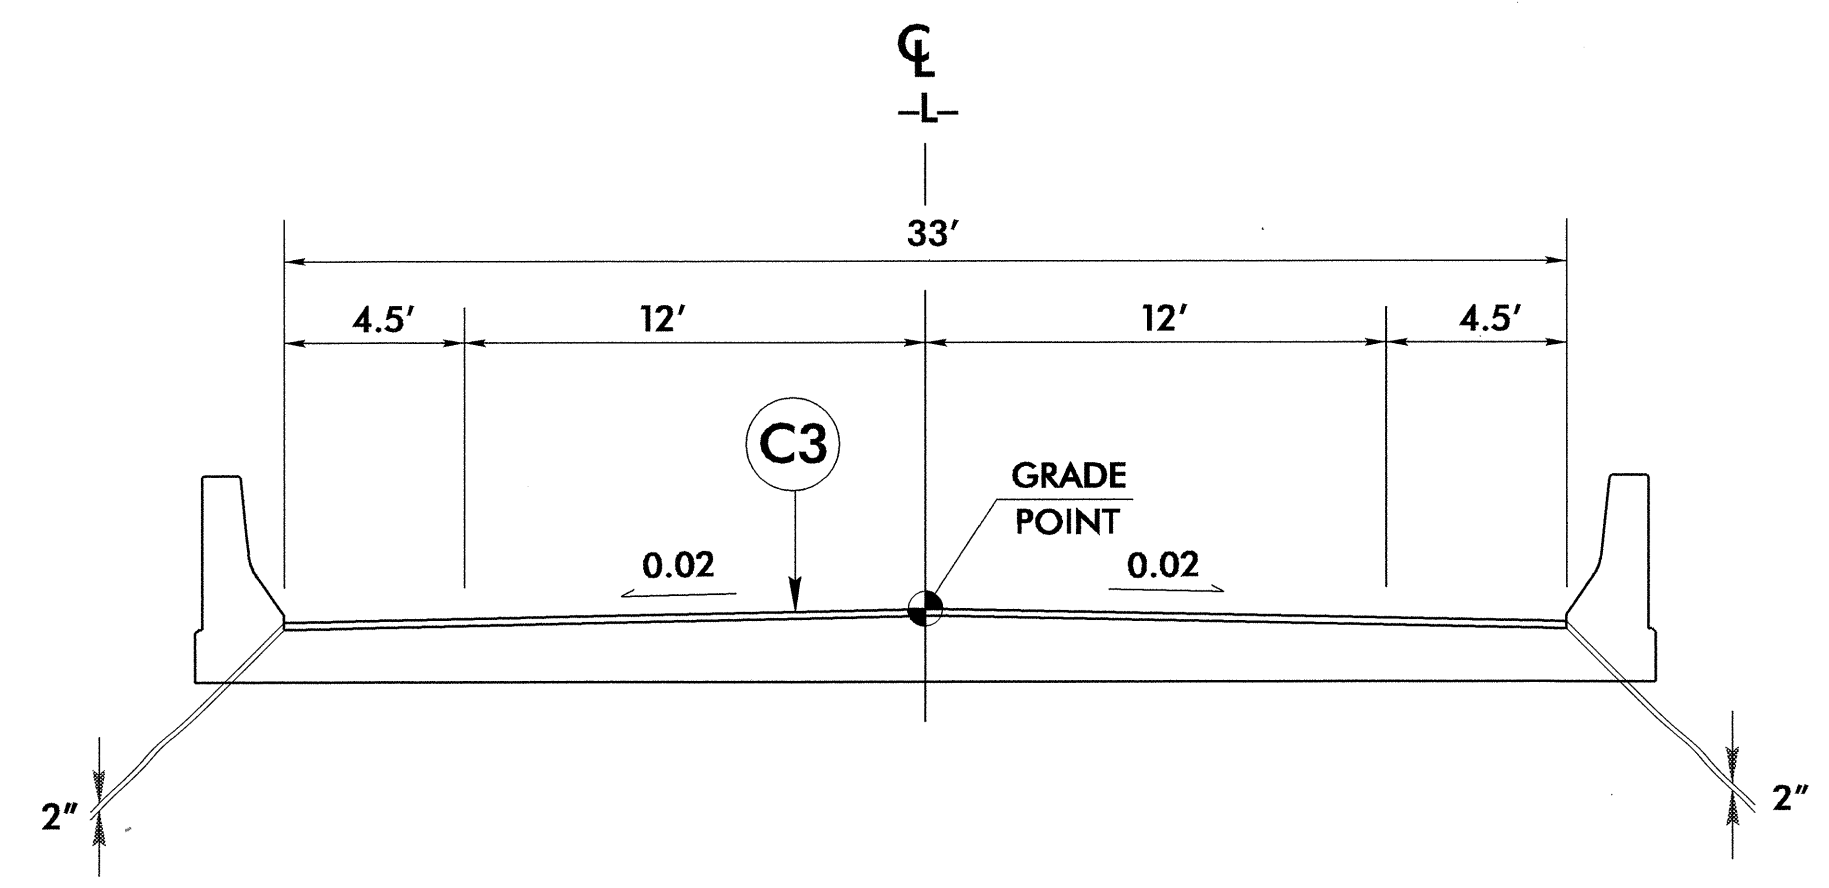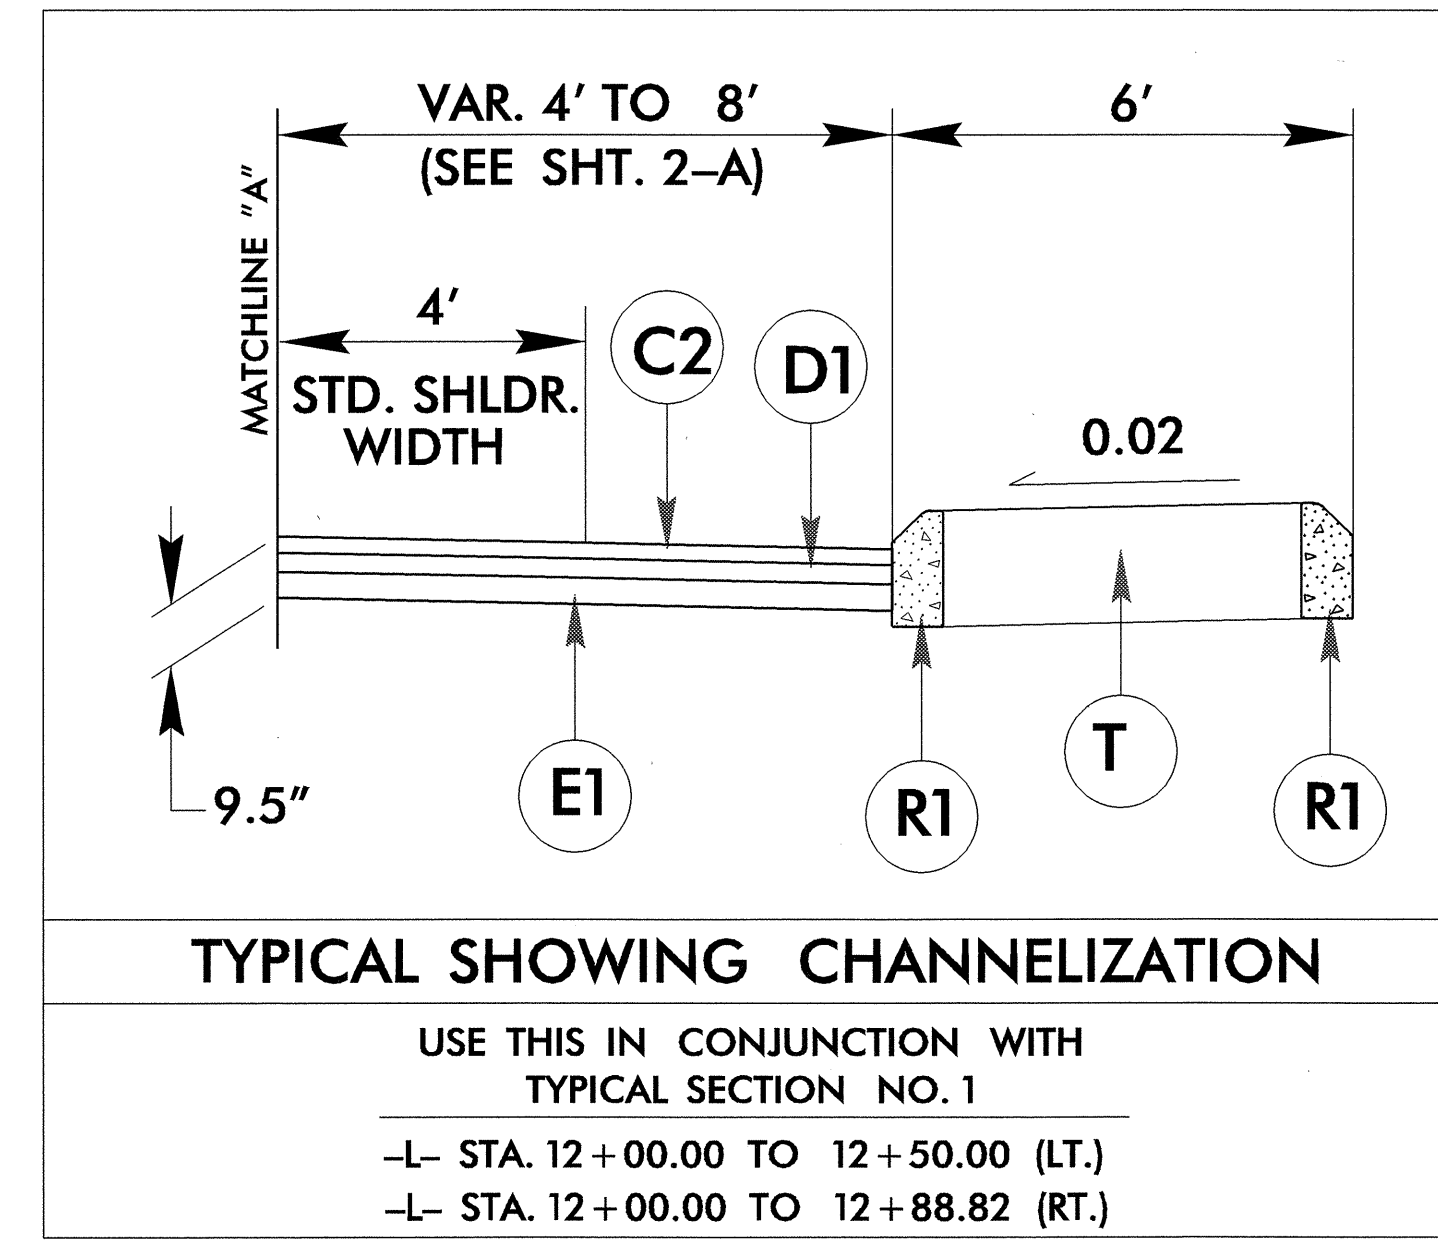

TYPICAL SECTION NO. 2

USE TYPICAL SECTION NO. 2
-L- STA 14+56.94 (BEG. BRIDGE) TO 15+79.06 (END BRIDGE)

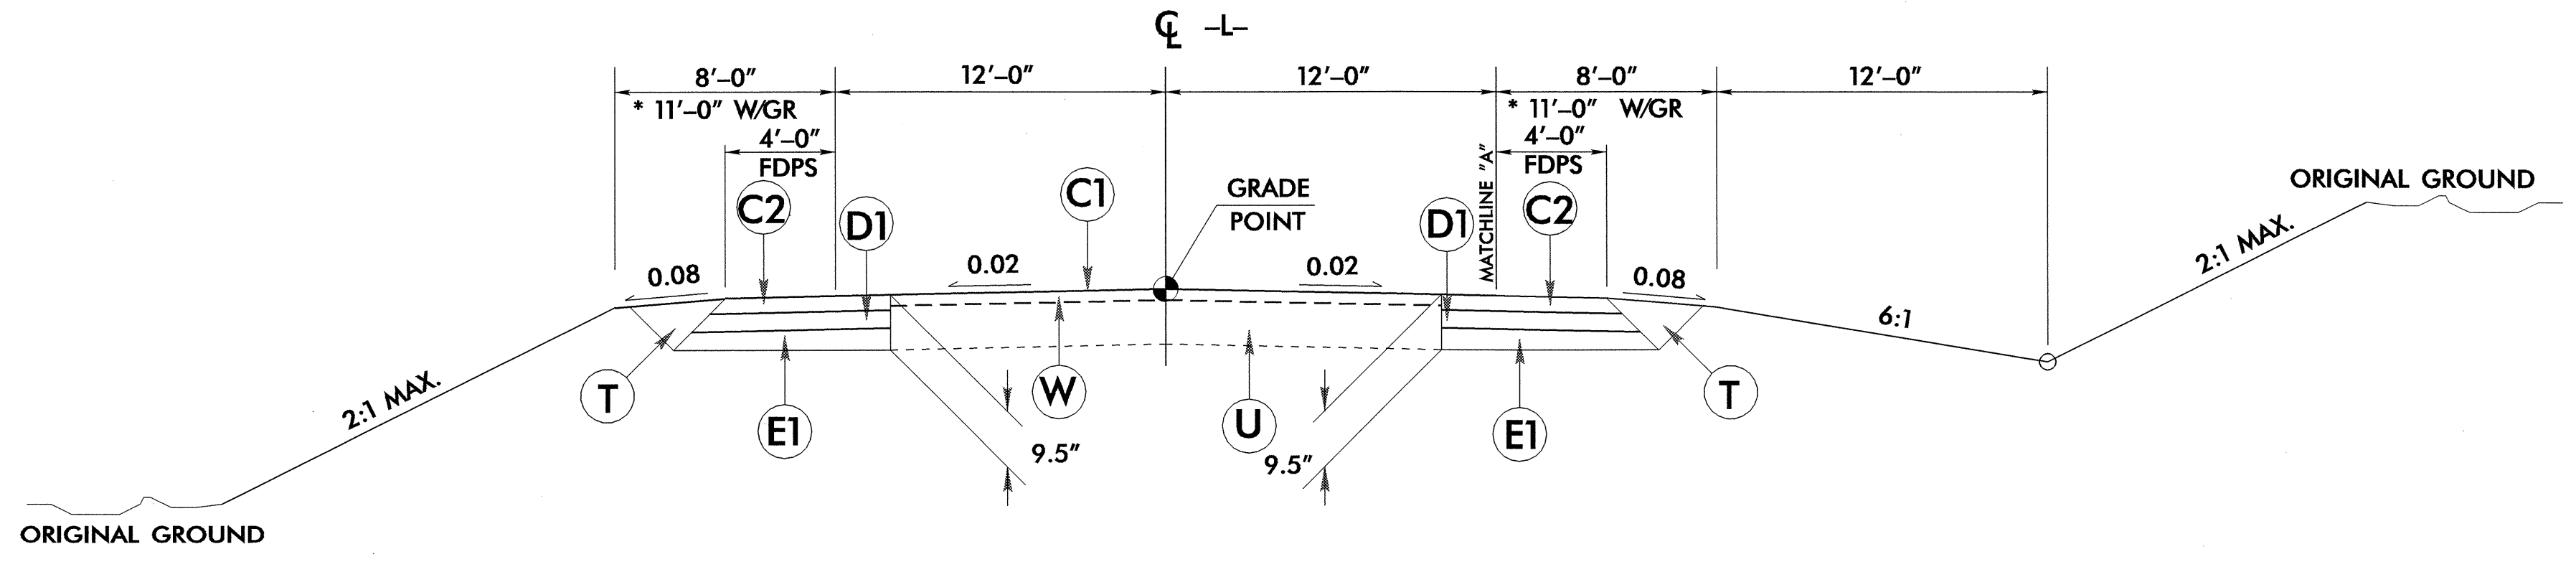

TYPICAL SECTION NO. 1

USE TYPICAL SECTION NO. 1
-L- STA 12+50.00 TO 14+56.94 (BEG. BRIDGE)
-L- STA 15+79.06 (END BRIDGE) TO 16+50.00

WIDEN & RESURFACE ON EXISTING SE
-L- STA 11+50.00 TO 12+50.00
-L- STA 16+50.00 TO 18+50.00

14-NOV-2003 11:45
R:\PROJ\33470\4P
RD\93475