

FLASHING YELLOW ARROW OVERLAP AND PROTECTED/PERMISSIVE SEQUENCE PROGRAMMING FOR OVERLAP A, B, C, G and H.

- From Main Menu select **4 - UNIT DATA**
- From UNIT DATA Submenu select **3 - OVERLAP DATA**

Use Up/Dn/Left/Right keys to position cursor on the desired Overlap. Use the NEXT key to select the overlap type. Press the ENT key and then program as per the Overlap screen(s) shown.

```
OVERLAP DATA
A: FYA E: --- I: --- M: ---
B: FYA F: --- J: --- N: ---
C: FYA G: STD K: --- O: ---
D: --- H: STD L: --- P: ---
PREV/NEXT TO CYCLE
```

OVERLAP A

Use Up/Dn/Left/Right keys to position cursor on Overlap 'A'. use the NEXT key to select 'FYA'. then press ENT

```
FYA OVERLAP - A DELAY/10: 0
PHASES..12345678 90123456
PERM PHASES: 01000000 00000000
PROT PHASES: 10000000 00000000
-PED PHASES: 00000000 00000000
OVERLAPS..ABCDEFGH IJKLMNOP
PERM OVERLAPS: x0000000 00000000
PROT OVERLAPS: x0000000 00000000
```

NOTICE DELAY/10 = 0

Press ESC

OVERLAP B

Use Up/Dn/Left/Right keys to position cursor on Overlap 'B'. use the NEXT key to select 'FYA'. then press ENT

```
FYA OVERLAP - B DELAY/10: 0
PHASES..12345678 90123456
PERM PHASES: 00010000 00000000
PROT PHASES: 10000000 00000000
-PED PHASES: 00000000 00000000
OVERLAPS..ABCDEFGH IJKLMNOP
PERM OVERLAPS: 0x000000 00000000
PROT OVERLAPS: 0x000000 00000000
```

NOTICE DELAY/10 = 0

Press ESC

OVERLAP C

Use Up/Dn/Left/Right keys to position cursor on Overlap 'C'. use the NEXT key to select 'FYA'. then press ENT

```
FYA OVERLAP - C DELAY/10: 0
PHASES..12345678 90123456
PERM PHASES: 01000000 00000000
PROT PHASES: 00010000 00000000
-PED PHASES: 00000000 00000000
OVERLAPS..ABCDEFGH IJKLMNOP
PERM OVERLAPS: 00x000000 00000000
PROT OVERLAPS: 00x000000 00000000
```

NOTICE DELAY/10 = 0

Press ESC

OVERLAP G

Use Up/Dn/Left/Right keys to position cursor on Overlap 'G'. use the NEXT key to select 'STD'. then press ENT

```
OVERLAP - G 12345678 90123456
PARENTS: 10000000 00000000
+GRN PHASES: 00000000 00000000
-G/Y PHASES: 00000000 00000000
-PED PHASES: 00000000 00000000
TRAIL GREEN STANDARD: 0 YEL/10: 40
TRAIL GREEN PREEMPT: 0 RED/10: 20
```

Press ESC

OVERLAP H

Use Up/Dn/Left/Right keys to position cursor on Overlap 'H'. use the NEXT key to select 'STD'. then press ENT

```
OVERLAP - H 12345678 90123456
PARENTS: 00010000 00000000
+GRN PHASES: 00000000 00000000
-G/Y PHASES: 00000000 00000000
-PED PHASES: 00000000 00000000
TRAIL GREEN STANDARD: 0 YEL/10: 40
TRAIL GREEN PREEMPT: 0 RED/10: 20
```

END OVERLAP PROGRAMMING

LOAD SWITCH MAPPING DETAIL

- From Main Menu select **4 - UNIT DATA**
- From UNIT DATA Submenu select **9 - OUTPUT MAPPING**

USE ENTER AND NEXT KEYS TO MAP 'LDSW 4' AS 'OLG' AND 'LDSW' AS 'DLH'

OUTPUT MAPPING							EDIT MODE: LDSW	
							E-TOGGLE MODE	
LDSW	PH1	PH2	PD2	OLG	PH4	PD4	DLH	
RED	1	2	3	4	5	6	7	
YEL	-	-	-	-	-	-	-	
GRN	-	-	-	-	-	-	-	
FIO	1	2	3	4	5	6	7	
PREV/NEXT TO CYCLE				D-DISPLAY COMPAT				

LOAD SWITCH MAPPING COMPLETE

INIT & N.A. RESP PROGRAMMING DETAIL

- From Main Menu select **3 - PHASE DATA**
- From PHASE DATA Submenu select **4 - INIT & N.A RESP**

PHASE	1	2	3	4	5	6	7	8
INITIAL	1	4	0	1	0	4	0	1
NA RESP	0	1	0	2	0	1	0	2

CODES	0	1	2	3	4	5	6
INITL	NONE	INACT	RED	YEL	GRN	DRK	G/DW
NA RSP	NONE	NA1	NA2	1&2	---	---	---


INIT & N.A. RESP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 05-2387
DESIGNED: May 2022
SEALED: 5-26-22
REVISED: N/A

Electrical Detail - Sheet 2 of 3

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared In the Offices of:

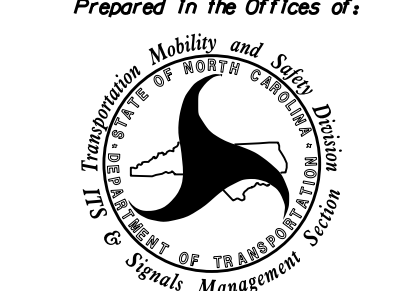


750 N. Greenfield Pkwy, Garner, NC 27529

SR 2006 (Durant Road) at Capital Hills Drive	
Division 5	Wake County Raleigh
PLAN DATE: May 2022	REVIEWED BY:
PREPARED BY: James Peterson	REVIEWED BY:
REVISIONS	INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

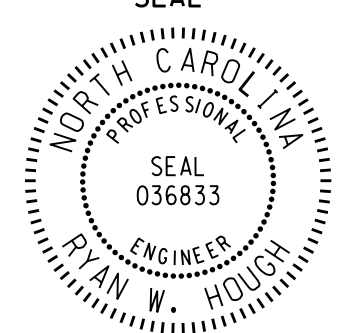

DocuSigned by: Ryan W. Hough 06/01/2022

SIG. INVENTORY NO. 05-2387

05-2387-2022-11-5-54
4/23/22 7:26:41 AM
j.peterson