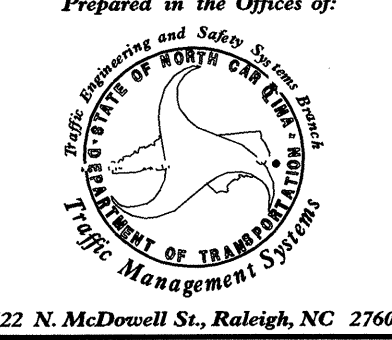
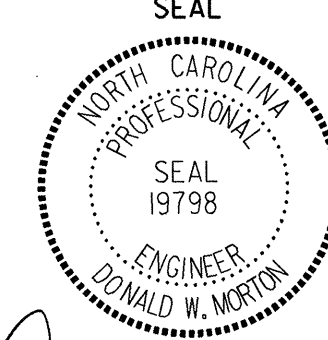



PRIOR TO PROJECT CONSTRUCTION

- THE FOLLOWING WORK IS TO BE ACCOMPLISHED AS SOON AS THE EXISTING UTILITY POLE LINE IS RELOCATED TO ITS FINAL PLACEMENT. THE INTENT IS TO RE-ESTABLISH AND MAINTAIN COMMUNICATIONS BETWEEN THE CITY OF HIGH POINT'S CENTRAL CONTROL FACILITY AND THE SIGNAL SHOP LOCATED AT KIVETT DRIVE AND TRIANGLE LAKE ROAD.
 - CONTRACTOR SHALL REFER TO PHASE 1 OF THE COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS.
1. COORDINATE WITH THE UTILITY COMPANY FOR THE REMOVAL OF THE EXISTING COMMUNICATIONS CABLE.
 2. CONTRACTOR SHALL INSTALL NEW SPLICE CABINET S-63 NEAR THE INTERSECTION OF KIVETT DRIVE AND PENDLETON STREET.
 3. CONTRACTOR SHALL REMOVE THE EXISTING 48 FIBER COMMUNICATIONS CABLE FROM THE EXISTING SPLICE CABINET S-63 AND BACK PULL THE CABLE TO THE NEW SPLICE CABINET S-63.
 4. CONTRACTOR SHALL INSTALL A NEW BASE MOUNTED SPLICE CABINET S-64 AT THE SIGNAL SHOP LOCATED AT KIVETT DRIVE AND TRIANGLE LAKE ROAD. RE-ROUTE A PORTION OF THE EXISTING 24 FIBER COMMUNICATIONS CABLE, WHICH ENTERS THE SIGNAL SHOP TO THE NEW SPLICE CABINET S-64.
 5. CONTRACTOR SHALL INSTALL NEW 48 FIBER COMMUNICATIONS CABLE FROM THE NEW SPLICE CABINET S-63, ATTACH TO RELOCATED UTILITY POLE LINE AND RUN IN A CONTINUOUS MANNER TO THE NEW SPLICE CABINET S-64 LOCATED AT THE SIGNAL SHOP. TERMINATE THE FIBER AS SHOWN IN THE SPLICE PLANS.
 6. THE FOLLOWING INTERSECTIONS MAY BE ADDED BACK TO THE CITY'S SIGNAL SYSTEM, AS THEY ARE RE-ESTABLISHED THROUGHOUT THE COURSE OF PROJECT CONSTRUCTION.
 - 1) 07-1467 - KIVETT DRIVE @ PENDLETON STREET
 - 2) 07-0856 - KIVETT DRIVE @ SCIENTIFIC DRIVE
 - 3) 07-2052 - KIVETT DRIVE @ TRIANGLE LAKE ROAD

(NOTE: CONTRACTOR SHOULD PROCEED WITH INSTALLING HIS AERIAL SPLICE ENCLOSURE AT THE INTERSECTION 07-0856 WHILE IN THE PROCESS OF INSTALLING THE 48 FIBER BETWEEN SPLICE CABINETS S-63 AND S-64.)

 <small>Prepared in the Offices of: Traffic Engineering and Safety Department of Transportation 11700 Management System 122 N. McDowell St., Raleigh, NC 27603</small>	PRIOR TO PROJECT CONSTRUCTION NOTES COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS	SEAL  SEAL 19798 ENGINEER DONALD W. MORTON												
	DIVISION 07 GUILFORD COUNTY HIGH POINT PLAN DATE: 05-15-04 REVIEWED BY: D. W. MORTON	PREPARED BY: C. B. HOLDEN RPKX PROJECT NO. 302-079-SIG6												
	SCALE 0  N/A	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REVISIONS	INIT.	DATE									
REVISIONS	INIT.	DATE												