

EMERGENCY VEHICLE PREEMPTION PROGRAMMING DETAIL

(program controller as shown below)


From Main Menu press 'A' (Preemption), then '1' (Standard Preemptions). Press 'NEXT' to advance to Preemption #2.

PREEMPTION #2	SETTINGS (NEXT:1-10)
INTERVAL/TIMING	CLEAR/DWELL PHASES
GRN YEL RED	12345678910111213141516
1 255 0.0 0.0	X X
2 0 0.0 0.0	
3 0 0.0 0.0	
4 0 0.0 0.0	
5 0 0.0 0.0	
EXIT CALLS	
OPTIONS	
PRIORITY (Y/N TO SELECT)MED
DELAY TIMER (0-255 SEC)*
MIN GREEN BEFORE PRE (0= DEFAULT)	...1
PED CLEAR BEFORE PRE (0= DEFAULT)	...0
YELLOW CLEAR BEFORE PRE (0= DEFAULT)	...0.0
RED CLEAR BEFORE PRE (0= DEFAULT)	...0.0
DWELL MIN TIMER (0-255 SEC)*
DWELL MAX TIMER (0=OFF,1-255MIN)	...0
DWELL HOLD-OVER TIMER (0-255)	...0
LATCH CALL?Y
LINK TO NEXT PREEMPT?N
ENABLE BACKUP PROTECTION?N
HOLD CLEAR 1 PHASES DURING DELAY?	...N
FAST GREEN FLASH DWELL PHASES?N
PED CLEARANCE THROUGH YELLOW?N
INHIBIT OVERLAP GREEN EXTENSION?N
SERVICE DURING SOFTWARE FLASH?N
REST IN RED DURING DWELL INTERVAL?	..N
FLASH DWELL INTERVAL?N
ALLOW PEDS IN DWELL INTERVAL?N
RE-TIME DWELL INTERVAL?Y
OVERLAPS:	ABCDEFGHIJKLMNOP
DWELL INT FLASH YELLOW	
OMIT OVERLAPS:	

* Denotes timing to be determined in field.

EV Preemption Control Box Wiring Detail

(wire as shown below)

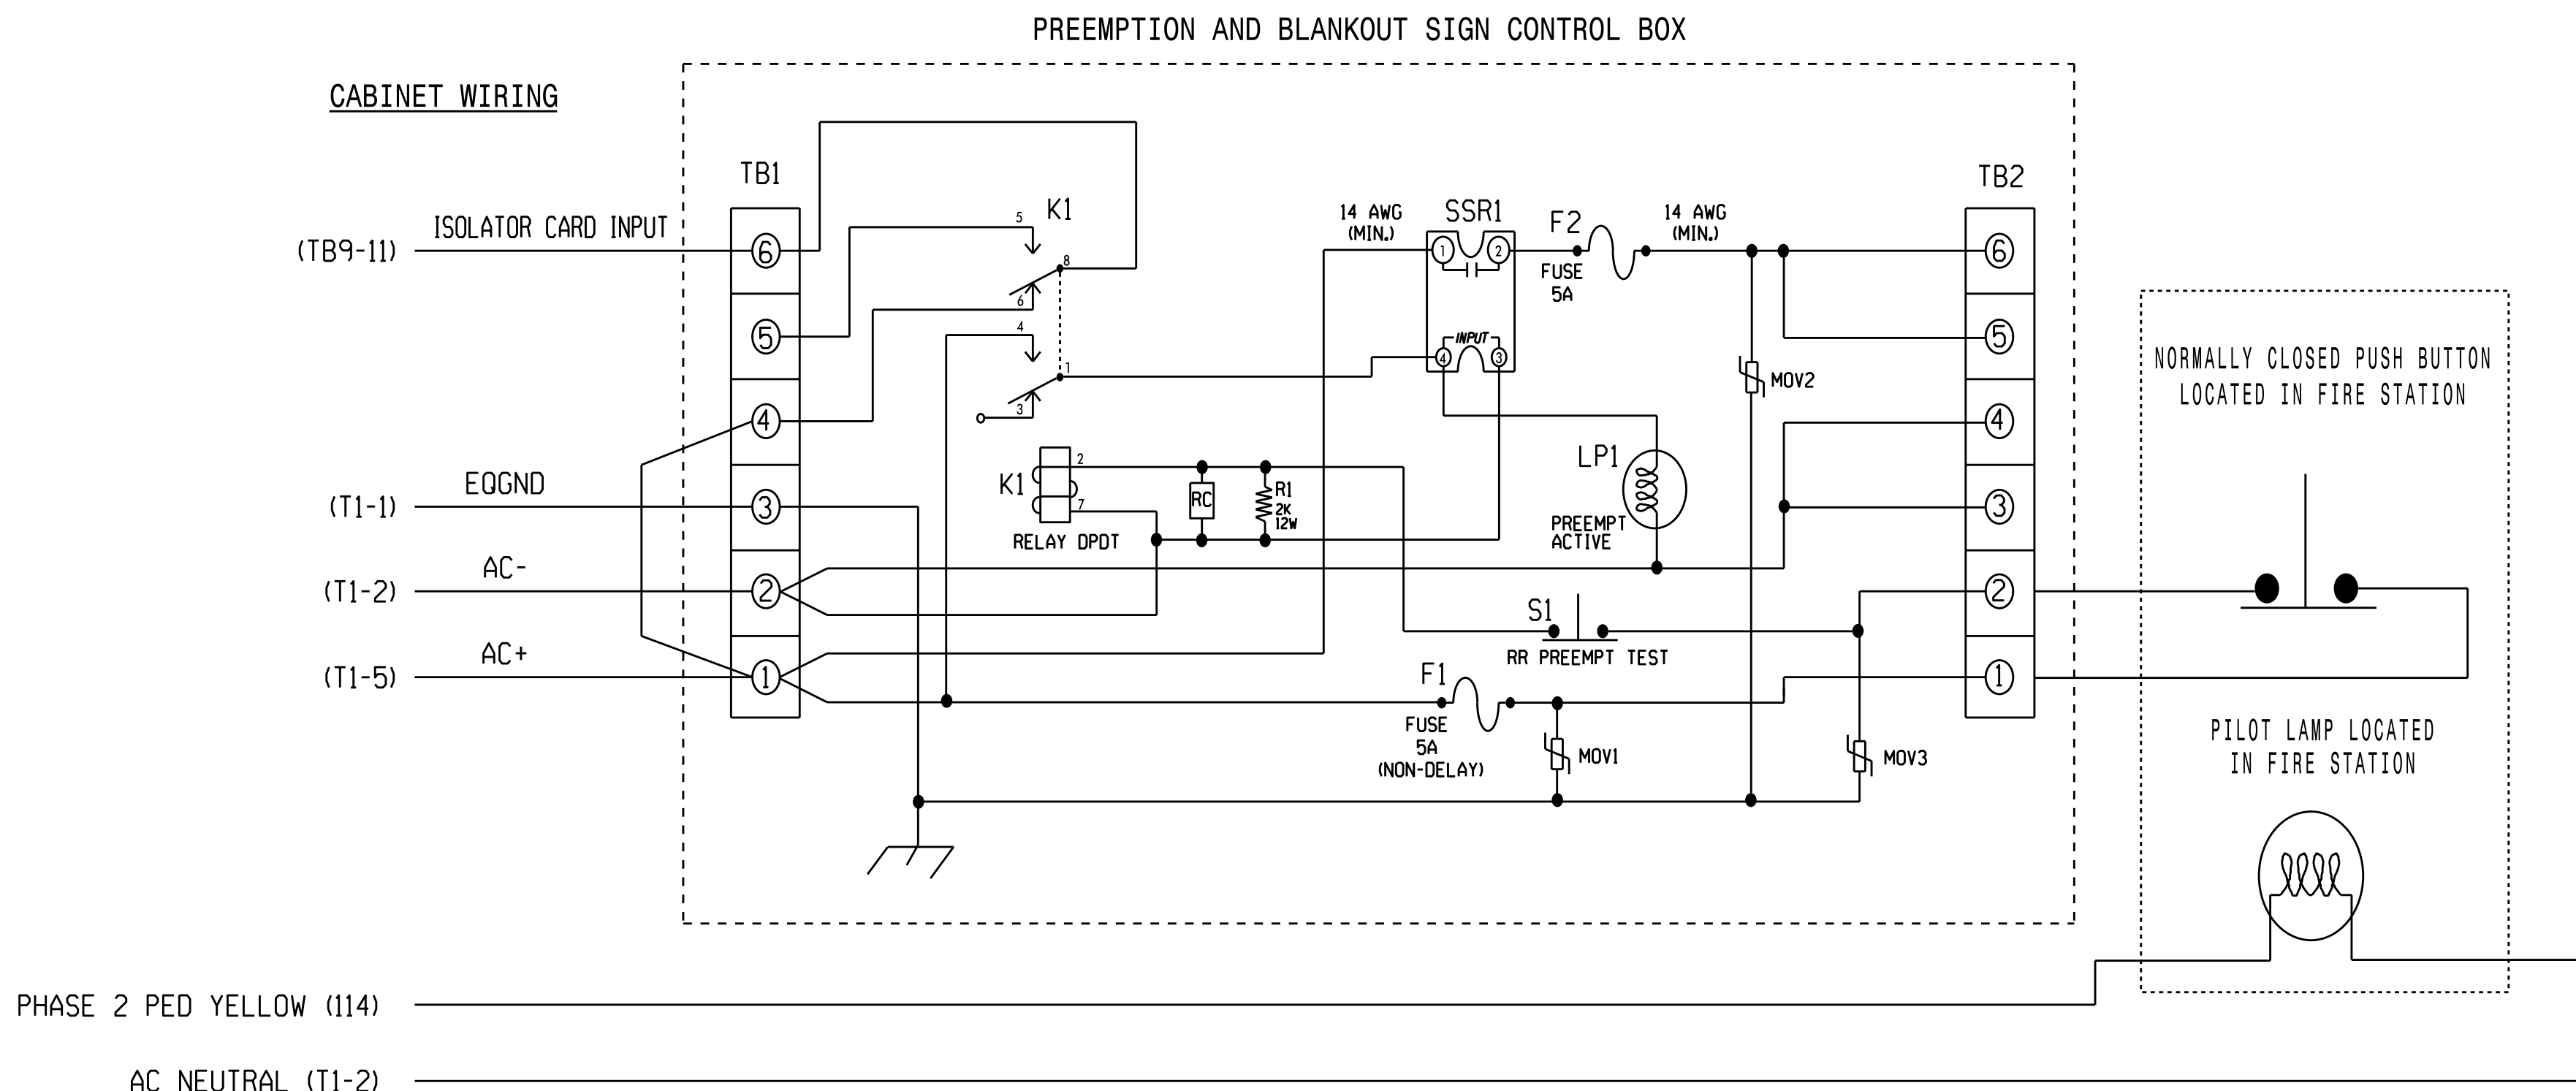


LAMP NOTES

1. Make sure load resistors are in place as shown in the Load Resistor Installation Detail on sheet 1.
2. Install a loadswitch in Output File Slot S3.

NOTES


1. Relay K1 is shown in the energized (Preempt not active) normal operation state.
2. Relay K1 is a DPDT with 120VAC coil with an octal base.
3. Relay SSR1 is a SPST (normally open) Solid State Relay with AC input and AC (25 amp) output.
4. AC Isolator Card shall activate preemption upon removal of AC+ from the input (as shown above). To accomplish this, set invert dip switch on AC Isolator Card.
5. IMPORTANT!! Terminal TB9-12 (on input panel) shall be connected to AC neutral (jumper may have to be added).

FRONT VIEW

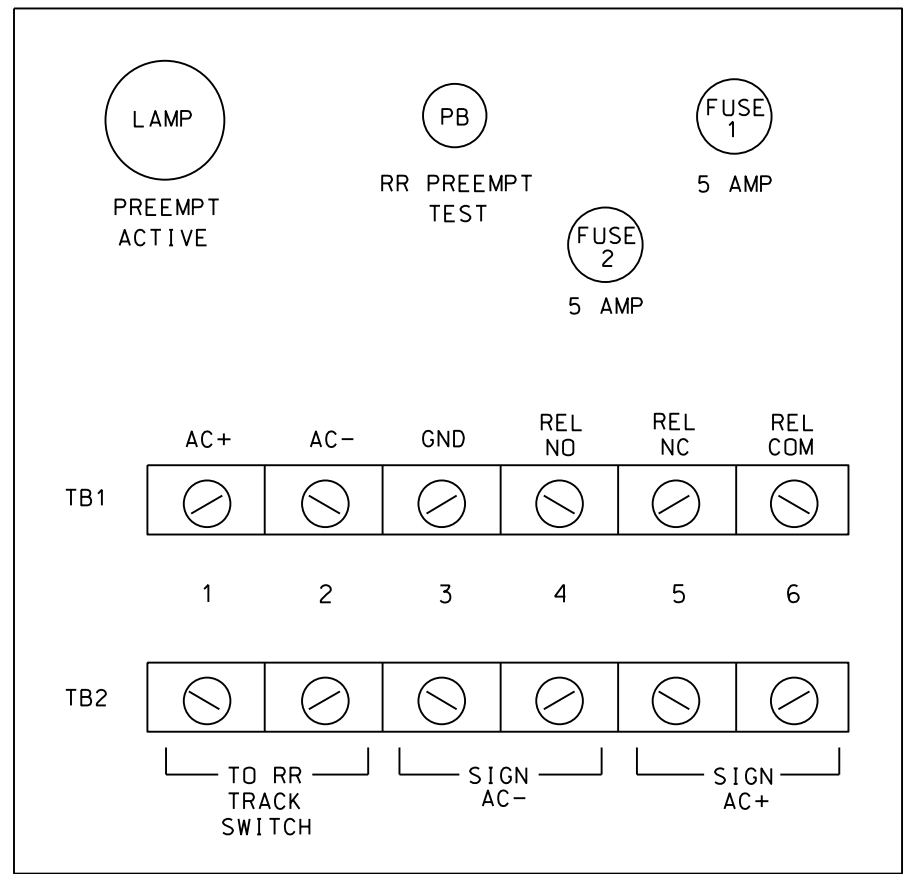

PREEMPT 2 AC ISOLATOR (MODEL 252) OUTPUT PROGRAMMING DETAIL

(set DIP switches as shown below)

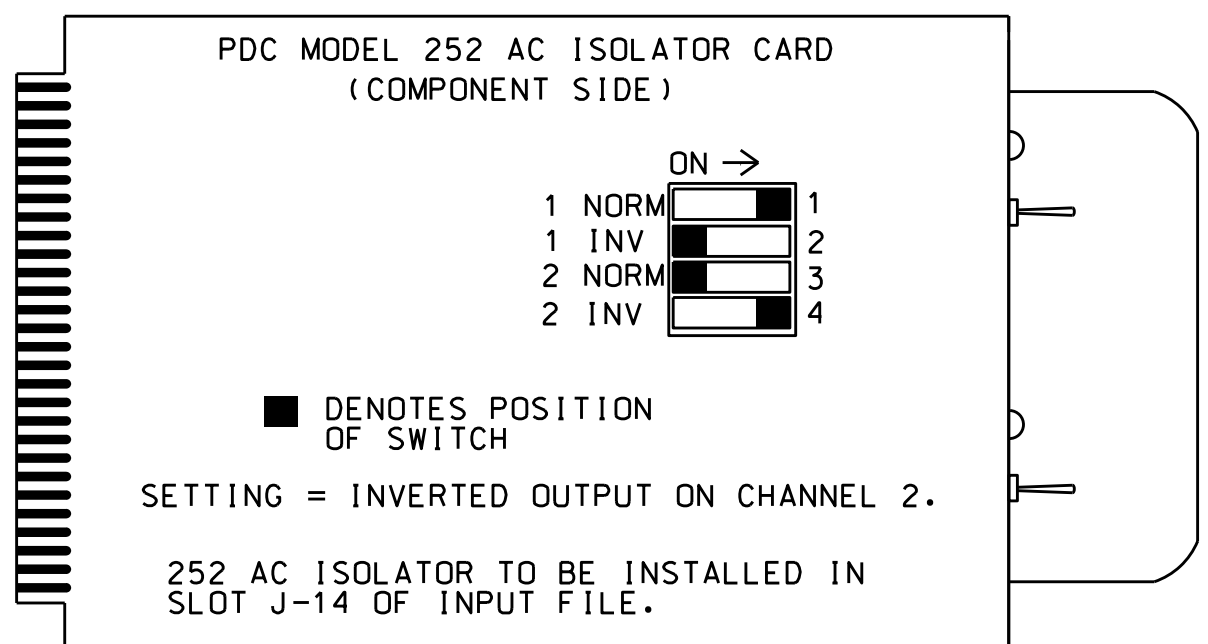

NOTE: IF ANOTHER MANUFACTURER TYPE OF AC ISOLATOR IS USED, OUTPUT PROGRAMMING IS LIKELY NOT TO EQUATE TO THAT SHOWN ABOVE.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 07-0774
 DESIGNED: July 2014
 SEALED: 3/27/2015
 REVISED: N/A

Electrical Detail - Sheet 3 of 3

ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared In the Offices of: 750 N. Greenfield Pkwy, Garner, NC 27529	NC 68 (Westchester Drive) at Chestnut Drive		SEAL SEAL 008453 JOHN T. ROWE, JR. ENGINEER
	Division 7 PLAN DATE: November 2014 PREPARED BY: S. Armstrong	Guilford County REVIEWED BY: JTR REVISIONS	

06-APR-2015 07:56
 S:\MITS\151\SIGNAL\work\hgr\cous\sig\Map\ArmsTrng070714_sm.ele.xxx.dgn
 S:\MITS\151\SIGNAL\work\hgr\cous\sig\Map\ArmsTrng070714_sm.ele.xxx.dgn
 S:\MITS\151\SIGNAL\work\hgr\cous\sig\Map\ArmsTrng070714_sm.ele.xxx.dgn