



	PROJECT REFERENCE NO.	SHEET NO.
	U-2408	2Y
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER
		
CONST. REV.		
R/W REV.		

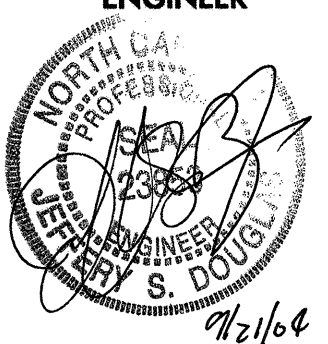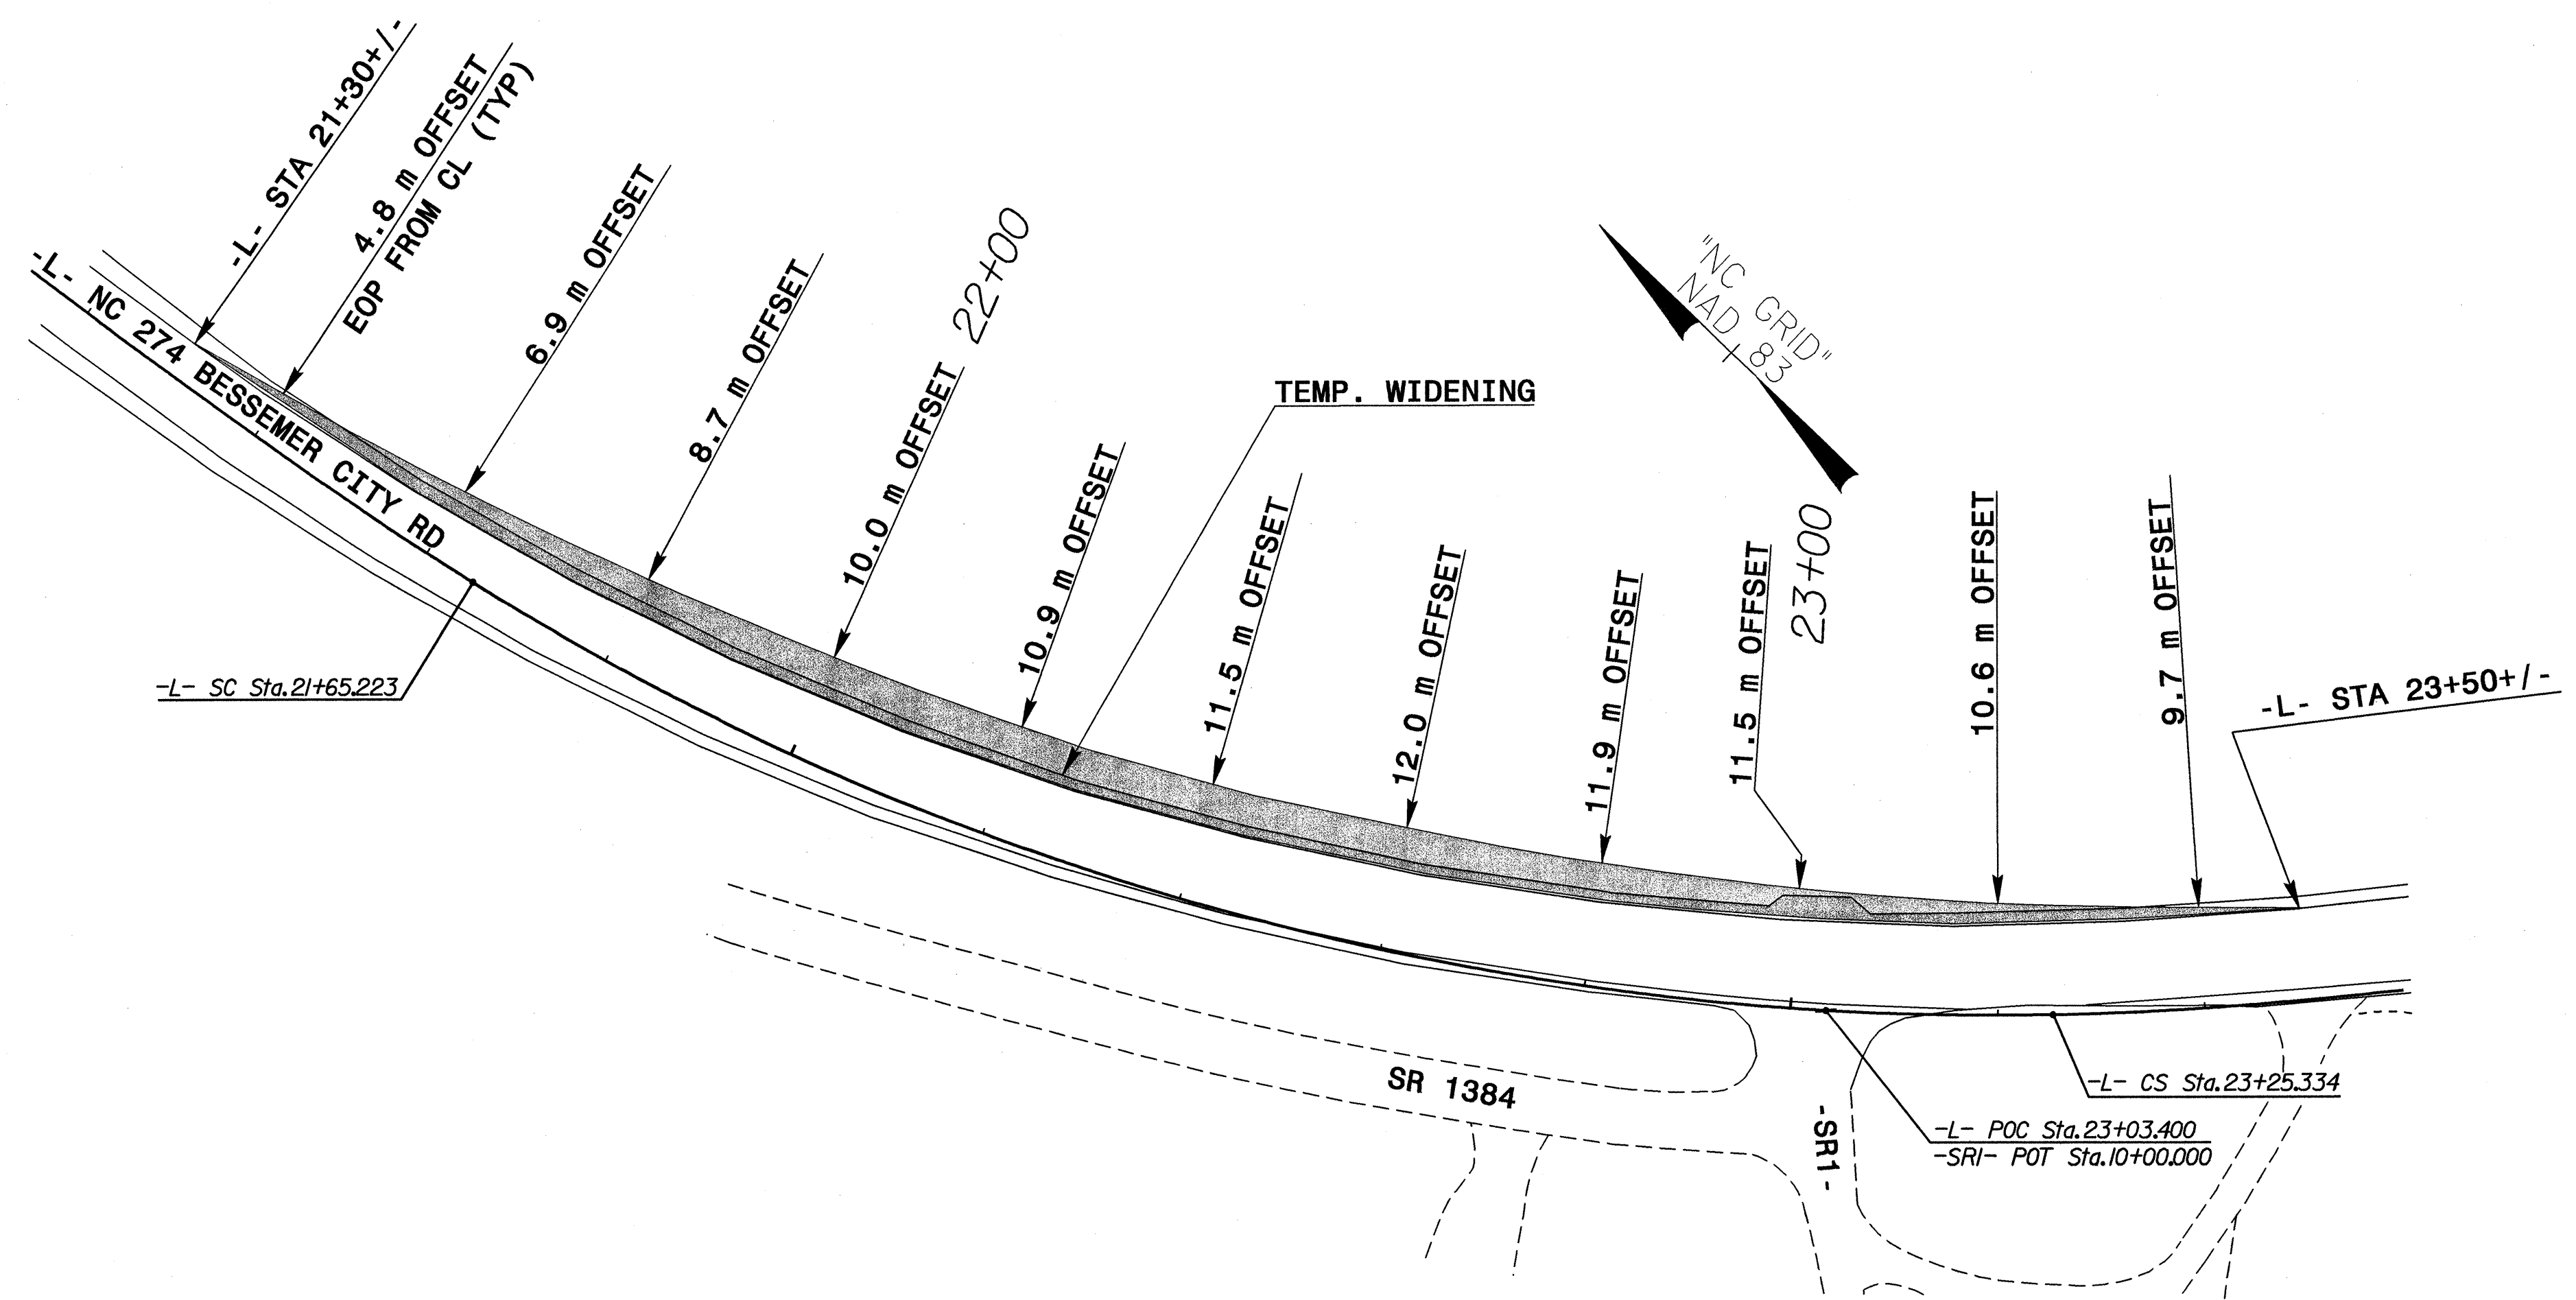

REVISIONS

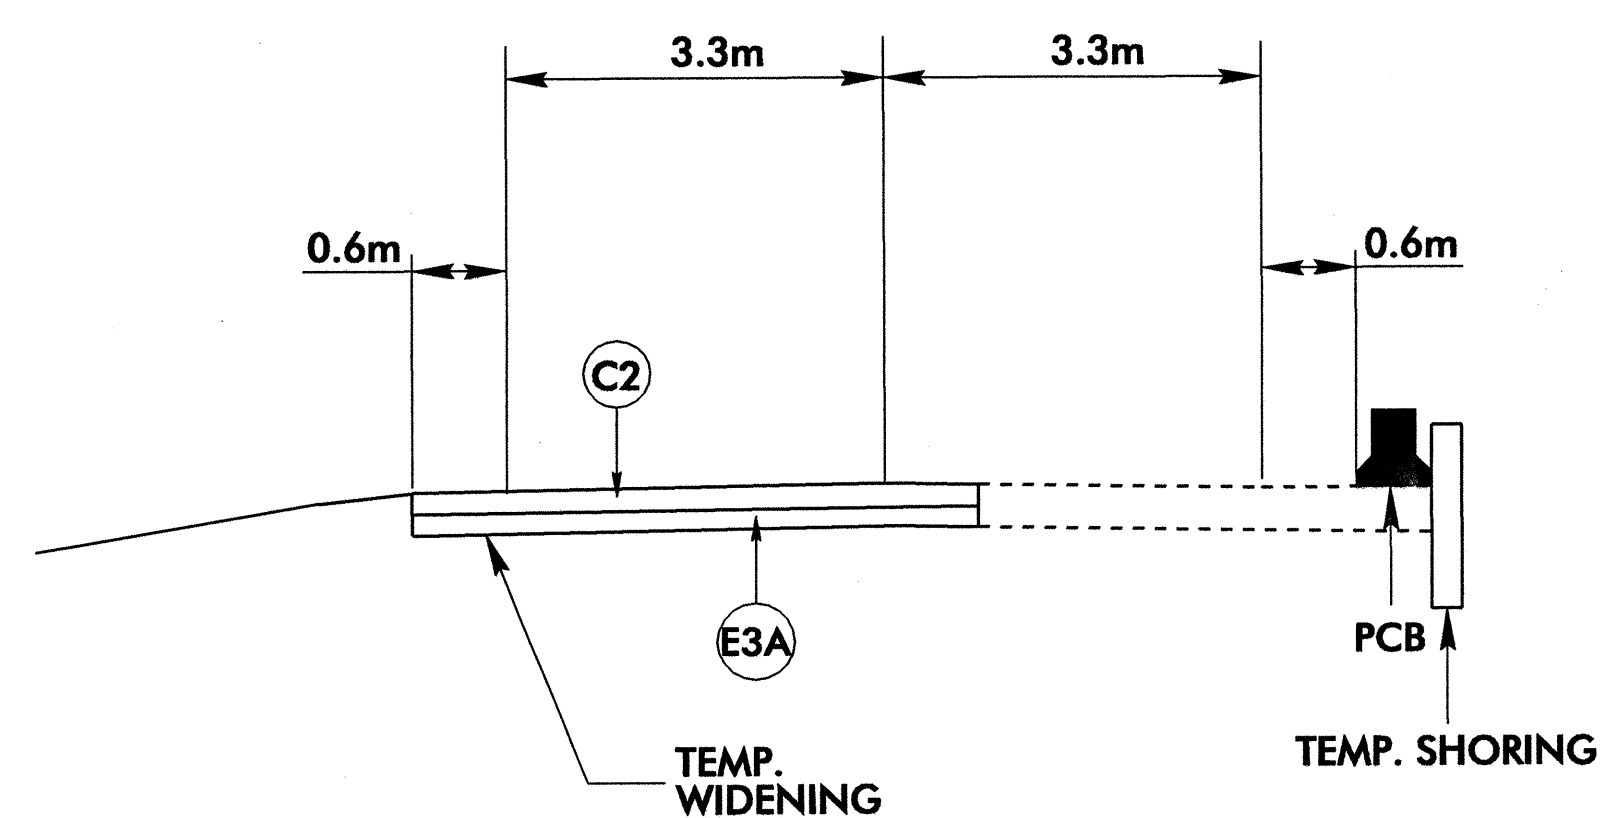

**TYPICAL DETOUR SECTION B**

PAVEMENT SCHEDULE	
C2	PROP. APPROX. 70 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 84 kg PER SQ. METER IN EACH OF TWO LAYERS.
E3A	PROP. APPROX. 120 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 290.0 kg PER SQ. METER

**TEMPORARY PAVEMENT WIDENING**

**INTERSECTION OF  
-SRI- (SR 1384 )  
AND -L- (NC 274 BESSEMER CITY ROAD)  
GAS UTILITY CONSTRUCTION DETOUR SHEET A  
(SEE SHEETS TCP-9A, TCP-9B, 12, X-17, X-18, X-19, X-20)**

8/17/98  
2:\SEP-2004\1124  
2:\Information\Projects\U2408\pco\U2408temp\dening.dwg