

PHASING DIAGRAM


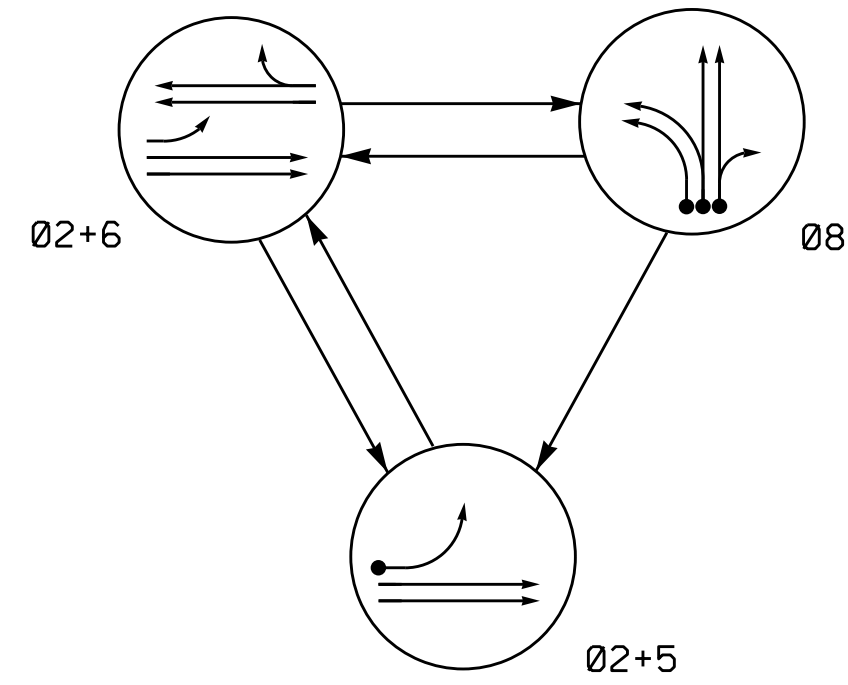


TABLE OF OPERATION

SIGNAL FACE	PHASE			
	02+5	02+6	08	F
22, 23	G	G	R	Y
51	-	F	R	Y
61, 62	R	G	R	Y
81	R	R	G	R
82	R	R	G	R
83	R	R	G	R

SIGNAL FACE I.D.

All Heads L.E.D.  
 = Bimodal Section

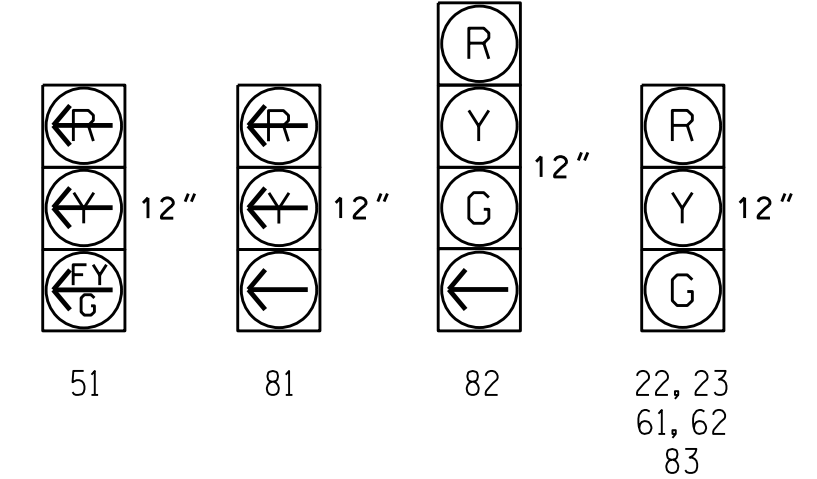

PHASING DIAGRAM DETECTION LEGEND

- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- PEDESTRIAN MOVEMENT

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	DETECTOR PROGRAMMING							
				PHASE	CALLING	EXTENSION	STRETCH TIME	DELAY TIME	SYSTEM LOOP	NEW CARD	
5A	6X40	0	2-4-2	-	5	Y	Y	-	15	-	Y
8A	6X60	+5	2-4-2	-	8	Y	Y	-	-	-	Y
8B	6X60	+5	2-4-2	-	8	Y	Y	-	-	-	Y
8C	6X60	+5	2-4-2	-	8	Y	Y	-	10	-	Y
S1	6X6	+150	EXIST	-	-	-	-	-	-	-	Y
S2	6X6	+150	EXIST	-	-	-	-	-	-	-	Y
S3	6X6	+250	EXIST	-	-	-	-	-	-	-	Y
S4	6X6	+250	EXIST	-	-	-	-	-	-	-	Y
S5	6X6	+250	EXIST	-	-	-	-	-	-	-	Y

3 Phase Semi-Actuated (High Point Signal System)

NOTES


1. Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
3. Phase 5 may be lagged.
4. Set all detector units to presence mode.
5. In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
6. Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
7. Pavement markings are existing.
8. Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.

LEGEND

- | PROPOSED | EXISTING |
|----------|----------|
|          |          |
|          | N/A      |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
| N/A      |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |
|          |          |

FEATURE	PHASE			
	2	5	6	8
Min Green 1 *	10	7	10	7
Extension 1 *	0.0	2.0	0.0	1.0
Max Green 1 *	45	15	45	25
Yellow Clearance	4.0	3.0	4.0	4.0
Red Clearance	1.9	2.6	1.9	1.8
Walk 1 *	-	-	-	-
Don't Walk 1	-	-	-	-
Seconds Per Actuation *	-	-	-	-
Max Variable Initial *	-	-	-	-
Time Before Reduction *	-	-	-	-
Time To Reduce *	-	-	-	-
Minimum Gap	-	-	-	-
Recall Mode**	MAX RECALL	-	MAX RECALL	-
Vehicle Call Memory	-	-	-	-
Dual Entry	-	-	-	-
Simultaneous Gap	ON	ON	ON	ON

\* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

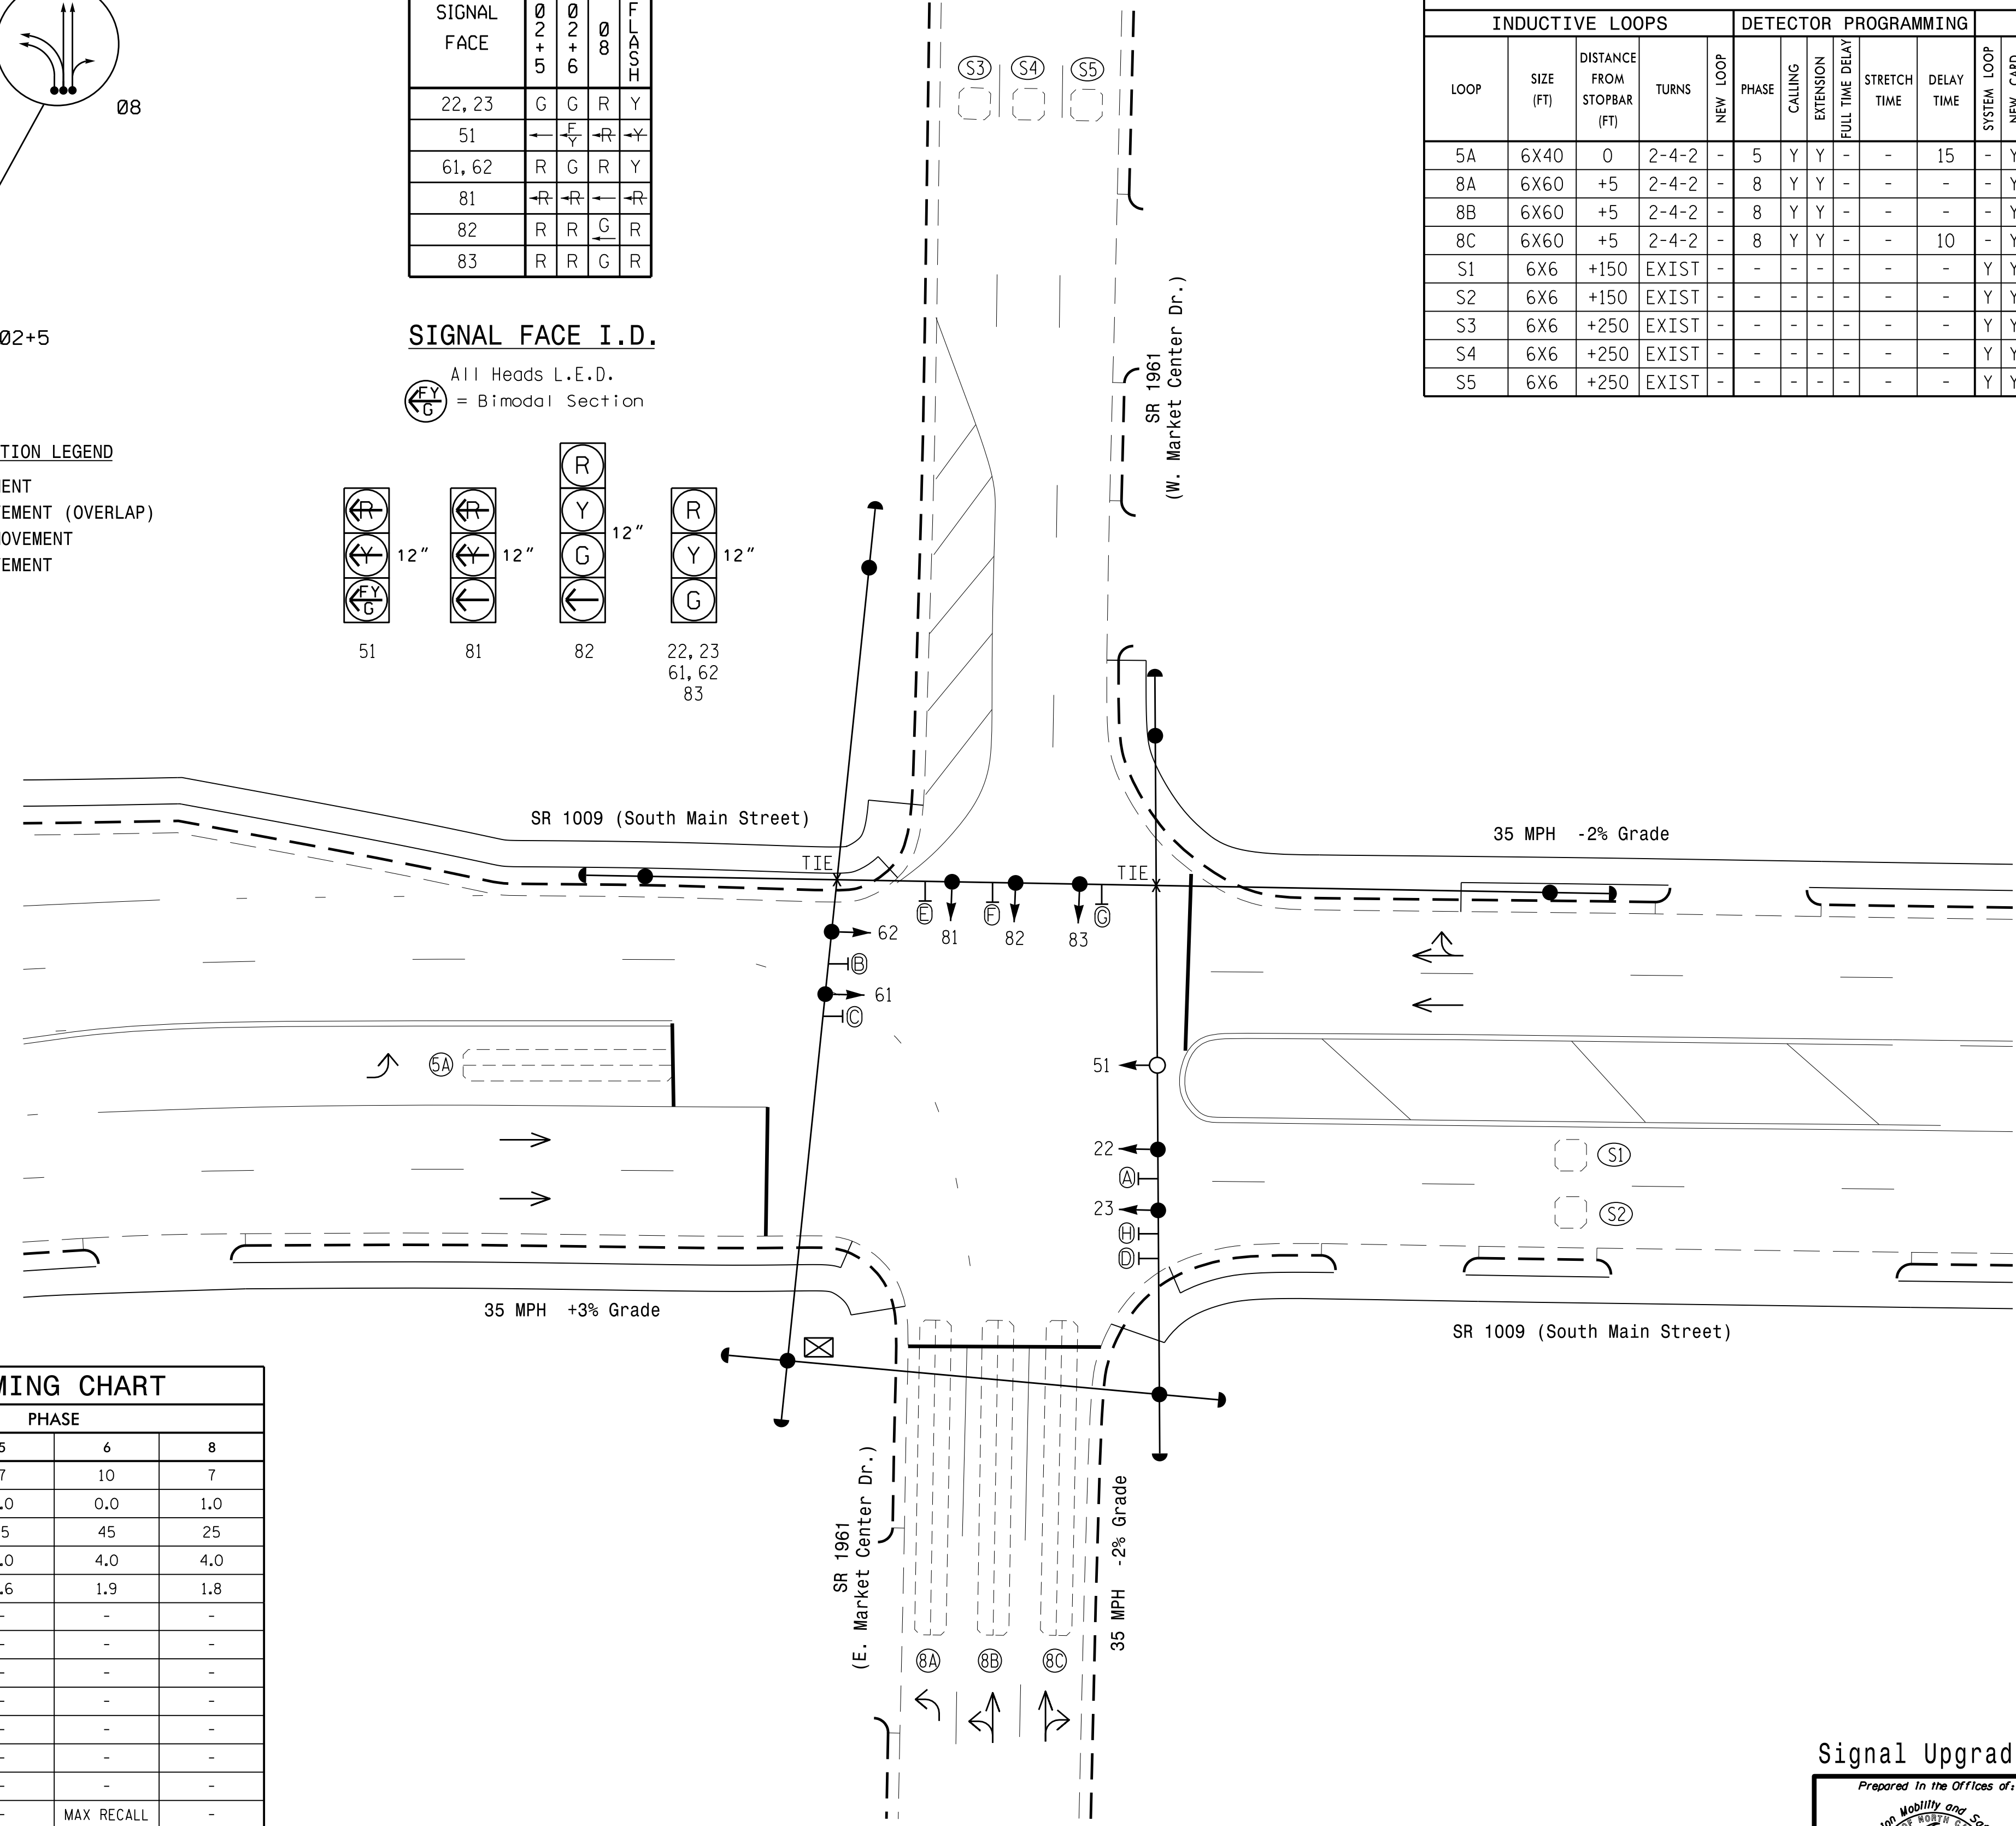

Signal Upgrade

	SR 1009 (South Main Street) at SR 1961 (Market Center Dr.)		
	Division 7 Guilford County High Point PLAN DATE: September 2014 PREPARED BY: Jeff Spence PREPARED BY: R.N. Zinser REVIEWED BY:	REVISIONS INIT. DATE	

07-0803-2015-15-53  
 S:\MITSU\15 Signal Design\Signal Design\Section\Central Region\014 T&C-5558 High Point\Signal Plans\07-0803-15-53.dgn  
 3/27/2015 10:53:27 AM