

### LOGICAL I/O PROCESSOR PROGRAMMING DETAIL TO PRODUCE SPECIAL FYA-PPLT SIGNAL SEQUENCE

(program controller as shown below)

- FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2, 3, 4, 5 AND 6.
- FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).

LOGICAL I/O COMMAND #1 (+/-COMMAND#)  
IF ACTIVE PHASE #1 IS ON  
AND RED CLEAR ON PHASE #1 IS ON

SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #50 ON  
SET OUTPUT ASSIGNMENT #51 OFF

PRESS '+'

NOTE: LOGIC FOR PHASE 1 RED CLEAR WHEN TRANSITIONING FROM PHASE 1 TO PHASE 2 (HEAD 11).

LOGICAL I/O COMMAND #2 (+/-COMMAND#)  
IF ACTIVE PHASE #1 IS ON

SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #52 OFF

PRESS '+'

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 1 (HEAD 11).

LOGICAL I/O COMMAND #3 (+/-COMMAND#)  
IF YELLOW ON PHASE #1 IS ON

SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #51 ON

PRESS '+'

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 1 (HEAD 11).

LOGICAL I/O COMMAND #4 (+/-COMMAND#)  
IF ACTIVE PHASE #5 IS ON  
AND RED CLEAR ON PHASE #5 IS ON

SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #42 ON  
SET OUTPUT ASSIGNMENT #43 OFF

PRESS '+'

NOTE: LOGIC FOR PHASE 5 RED CLEAR WHEN TRANSITIONING FROM PHASE 5 TO PHASE 6 (HEAD 51).

LOGICAL I/O COMMAND #5 (+/-COMMAND#)  
IF ACTIVE PHASE #5 IS ON

SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #44 OFF

PRESS '+'

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 5 (HEAD 51).

LOGICAL I/O COMMAND #6 (+/-COMMAND#)  
IF YELLOW ON PHASE #5 IS ON

SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #43 ON

PRESS '+'

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 5 (HEAD 51).

LOGIC I/O PROCESSOR PROGRAMMING COMPLETE

**OUTPUT REFERENCE SCHEDULE**

|                              |
|------------------------------|
| OUTPUT 42 = Overlap C Red    |
| OUTPUT 43 = Overlap C Yellow |
| OUTPUT 44 = Overlap C Green  |
| OUTPUT 50 = Overlap A Red    |
| OUTPUT 51 = Overlap A Yellow |
| OUTPUT 52 = Overlap A Green  |

### OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

- FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS  
PHASE: 12345678910111213141516  
VEH OVL PARENTS: XX  
VEH OVL NOT VEH:  
VEH OVL NOT PED:  
VEH OVL GRN EXT:  
STARTUP COLOR: - RED - YELLOW - GREEN  
FLASH COLORS: - RED - YELLOW X GREEN  
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)  
FLASH YELLOW IN CONTROLLER FLASH?...Y  
GREEN EXTENSION (0-255 SEC)...0.0  
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0  
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0  
OUTPUT AS PHASE # (0=NONE, 1-16)...0

← NOTICE GREEN FLASH

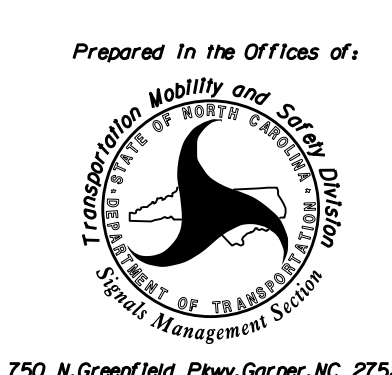
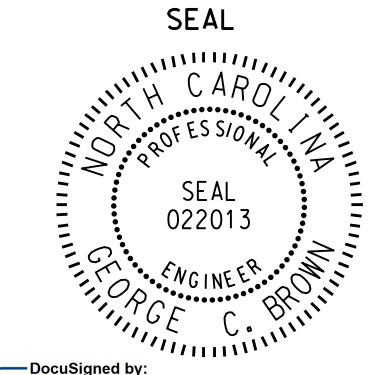
PAGE 1: VEHICLE OVERLAP 'C' SETTINGS  
PHASE: 12345678910111213141516  
VEH OVL PARENTS: XX  
VEH OVL NOT VEH:  
VEH OVL NOT PED:  
VEH OVL GRN EXT:  
STARTUP COLOR: - RED - YELLOW - GREEN  
FLASH COLORS: - RED - YELLOW X GREEN  
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)  
FLASH YELLOW IN CONTROLLER FLASH?...Y  
GREEN EXTENSION (0-255 SEC)...0.0  
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0  
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0  
OUTPUT AS PHASE # (0=NONE, 1-16)...0

← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR  
THE SIGNAL DESIGN: 07-0948  
DESIGNED: July 2014  
SEALED: 4/13/2015  
REVISED: N/A

Electrical Detail - Sheet 2 of 2

|   |   |  |  |
|---|---|--|--|
|  | ELECTRICAL AND PROGRAMMING DETAILS FOR:<br>SR 9161 (W. Market Center Dr.)<br>at<br>South Elm Street |  | SEAL<br>        |
|   | Division 7<br>PLAN DATE: October 2014<br>PREPARED BY: C. Strickland                                 | Guilford County<br>High Point<br>REVIEWED BY: T. Joyce<br>REVIEWED BY: |  |
| 750 N. Greenfield Pkwy, Garner, NC 27529  |   |  | DocuSigned by:<br>George C. Brown 4/21/2015<br>F12801E050E8434<br>DATE<br>SIG. INVENTORY NO. 07-0948 |

20-Apr-2015 09:59  
 C:\IT\5511\T5\Sigma\work\p0045510\_Mar0511\ckland\00948\_sme\_ie.xxx.dgn  
 C:\IT\5511\T5\Sigma\work\p0045510\_Mar0511\ckland\00948\_sme\_ie.xxx.dgn