


EDI MODEL 2010ECL-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

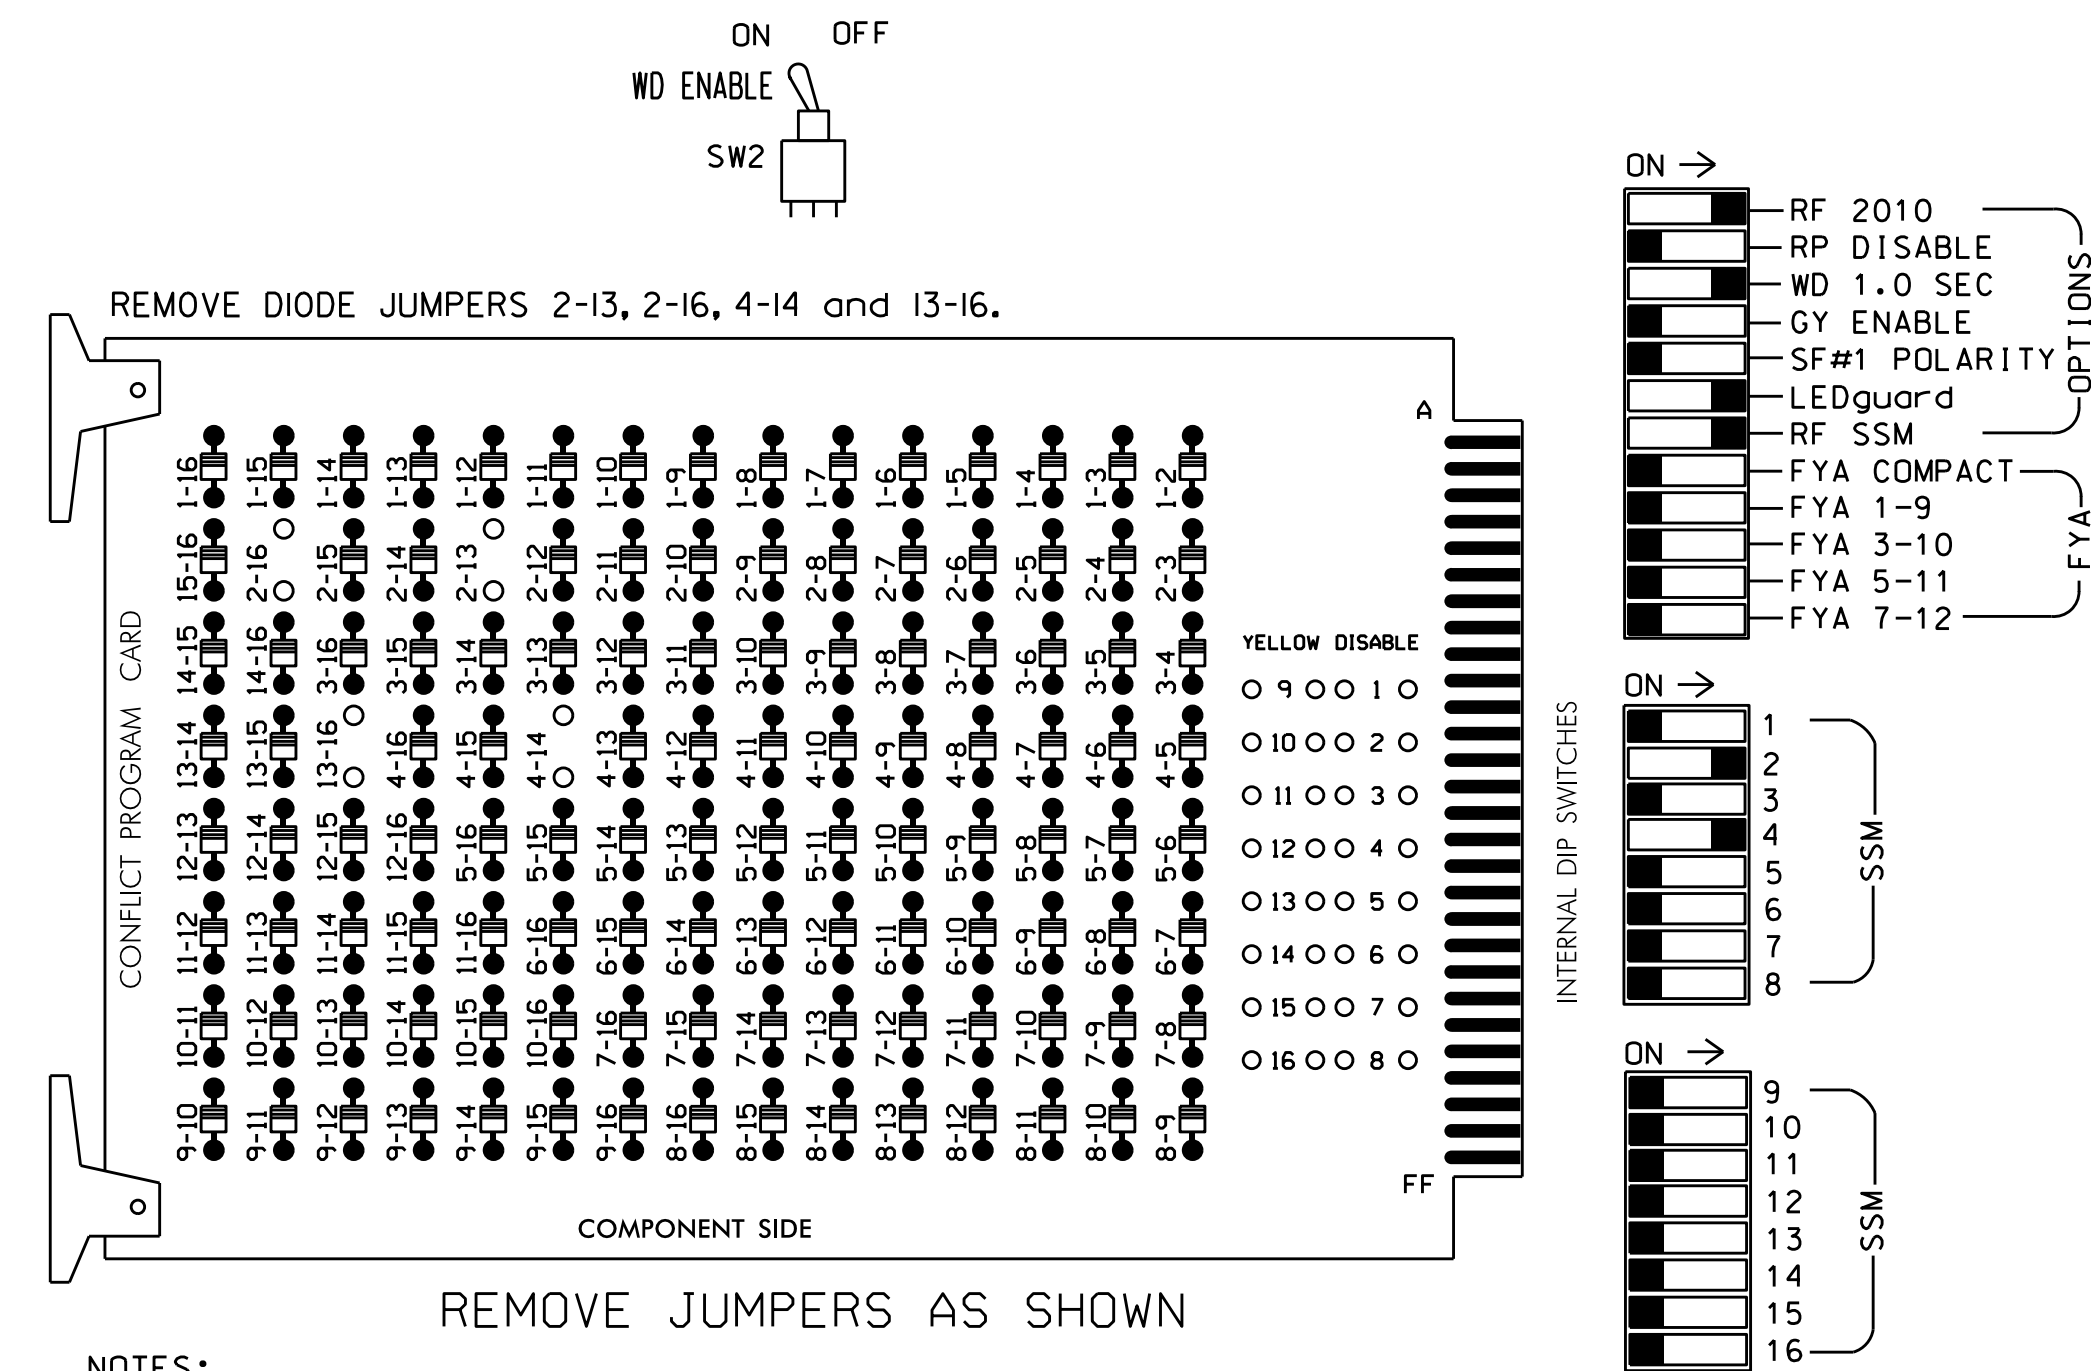

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Make sure jumpers SEL2-SEL5 are present on the monitor board.

■ = DENOTES POSITION OF SWITCH

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Ensure that Red Enable is active at all times during normal operation. To prevent Red Failures on unused monitor channels, tie unused red monitor inputs 1,3,5, 6,7,8,9,10,11,12,13,14,15 & 16 to load switch AC+ per the cabinet manufacturer's instructions.
3. Program controller to start up in phase 2 green.
4. Enable simultaneous gap-out feature, on controller unit, for all phases.
5. The cabinet and controller are part of the Raleigh City Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070L
 CABINET.....336
 SOFTWARE.....SE-PAC2070
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S2,S2P,S4,S4P,S8P
 PHASES USED.....2,2 PED,4,4 PED
 OVERLAP A.....NOT USED
 OVERLAP B.....NOT USED
 OVERLAP C.....NOT USED
 OVERLAP D.....NOT USED
 OVERLAP E.....2
 *OVERLAP F.....2
 *Used for Advance Beacon control.


SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P
PHASE	1	OLE	2 PED	3	4	4 PED	5	6	6 PED	7	8	OLF
SIGNAL HEAD NO.	NU	21, 22,23	P21,P22, P23,P24	NU	41,42	P41,P42, P43,P44	NU	NU	NU	NU	NU	★
RED		128			101							
YELLOW		129			102							
GREEN		130			103							
RED ARROW												
YELLOW ARROW												
GREEN ARROW												
Hand icon			113			104						
PED YELLOW												
Person icon			115			106						*

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ Used for Advance Beacon control. See sheets 2 and 3 for programming and wiring details.

INPUT FILE POSITION LAYOUT

(front view)

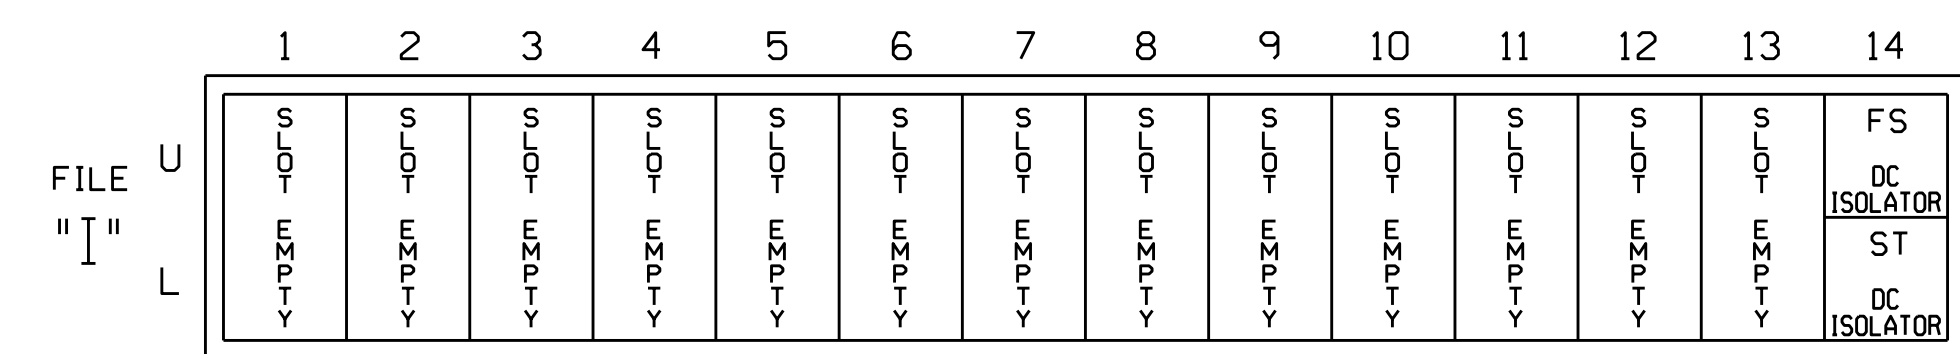

EX.: 1A, 2A, ETC. = LOOP NO.'S


FS = FLASH SENSE
 ST = STOP TIME

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

LOAD RESISTOR INSTALLATION DETAIL

ACCEPTABLE VALUES	
VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

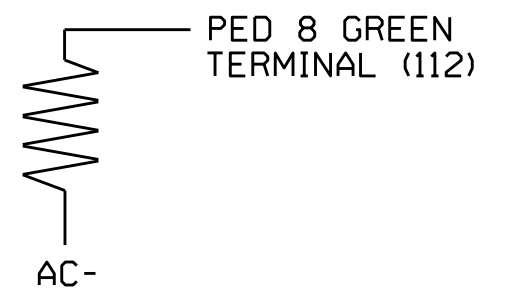

03-1-15-2016 09:50 S:\IT\ASIS\IS: Signal\work\hrc\pau\51g_Maps\11r\ck\lan\051046_sm.le_xxx.dgn

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 05-1046
 DESIGNED: December 2015
 SEALED: 1/25/2016
 REVISED: N/A

Electrical Detail - Sheet 1 of 3

Electrical and Programming Details for: **US 70 EB-401 SB/NC 50 SB (N. Dawson Street) at W. Lane Street**

Prepared in the Offices of: **Public Utilities and Safety Services, City of Wake County, Raleigh, NC**

Division 5 Wake County Raleigh

PLAN DATE: December 2015 REVIEWED BY:

PREPARED BY: C. Strickland REVIEWED BY:

REVISIONS INIT. DATE

DocuSigned by: **Keith M. Mims** 2/4/2016

SEAL: 036880 ENGINEER: KEITH M. MIMS

SIG. INVENTORY NO. 05-1046