
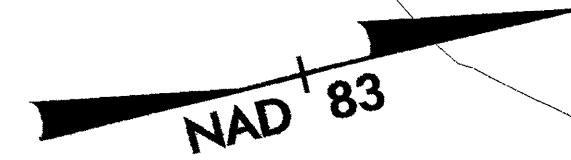


NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE- B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

NOTE:
UTILIZE SPECIAL STILLING BASIN AND/OR TEMPORARY
ROCK SEDIMENT DAM TYPE - B
AS STILLING BASIN WHERE APPLICABLE.



CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 26

PROJECT REFERENCE NO. R-2206C		SHEET NO. EC-26CONST.26	
R / W SHEET NO.			
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	
CONST. REV.		R / W REV.	



MATCHLINE SEE SHEET 25
-L- STA. 254 + 00.000

MATCHLINE SEE SHEET 27
-L- STA. 257 + 40.000

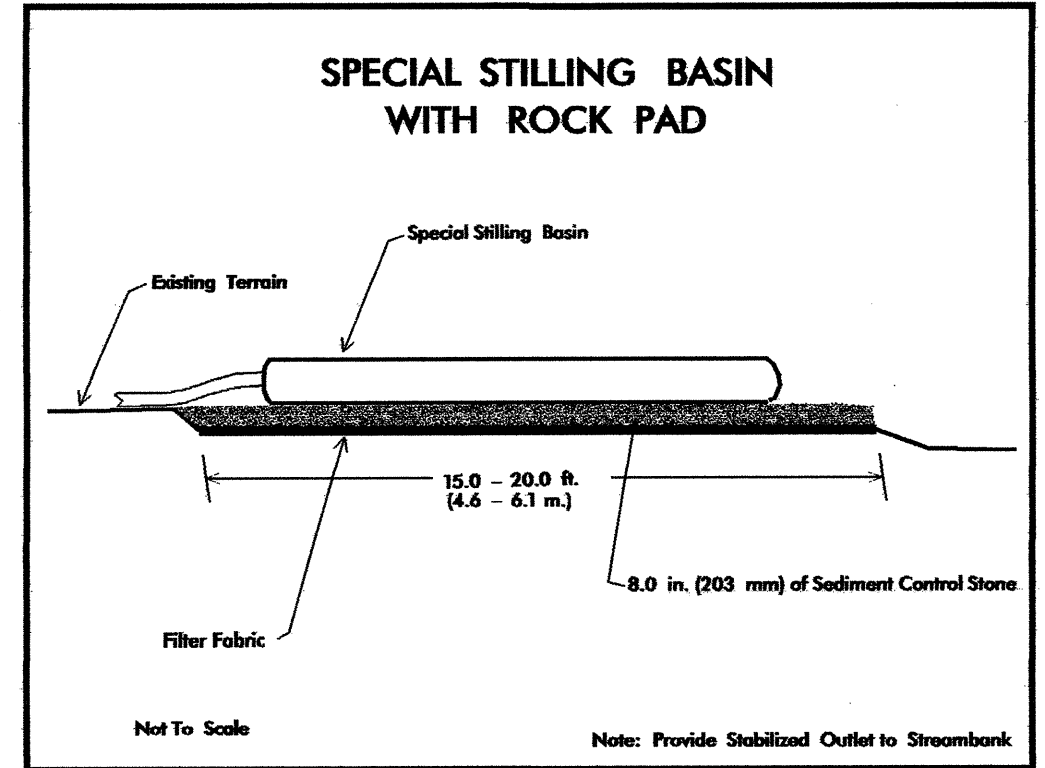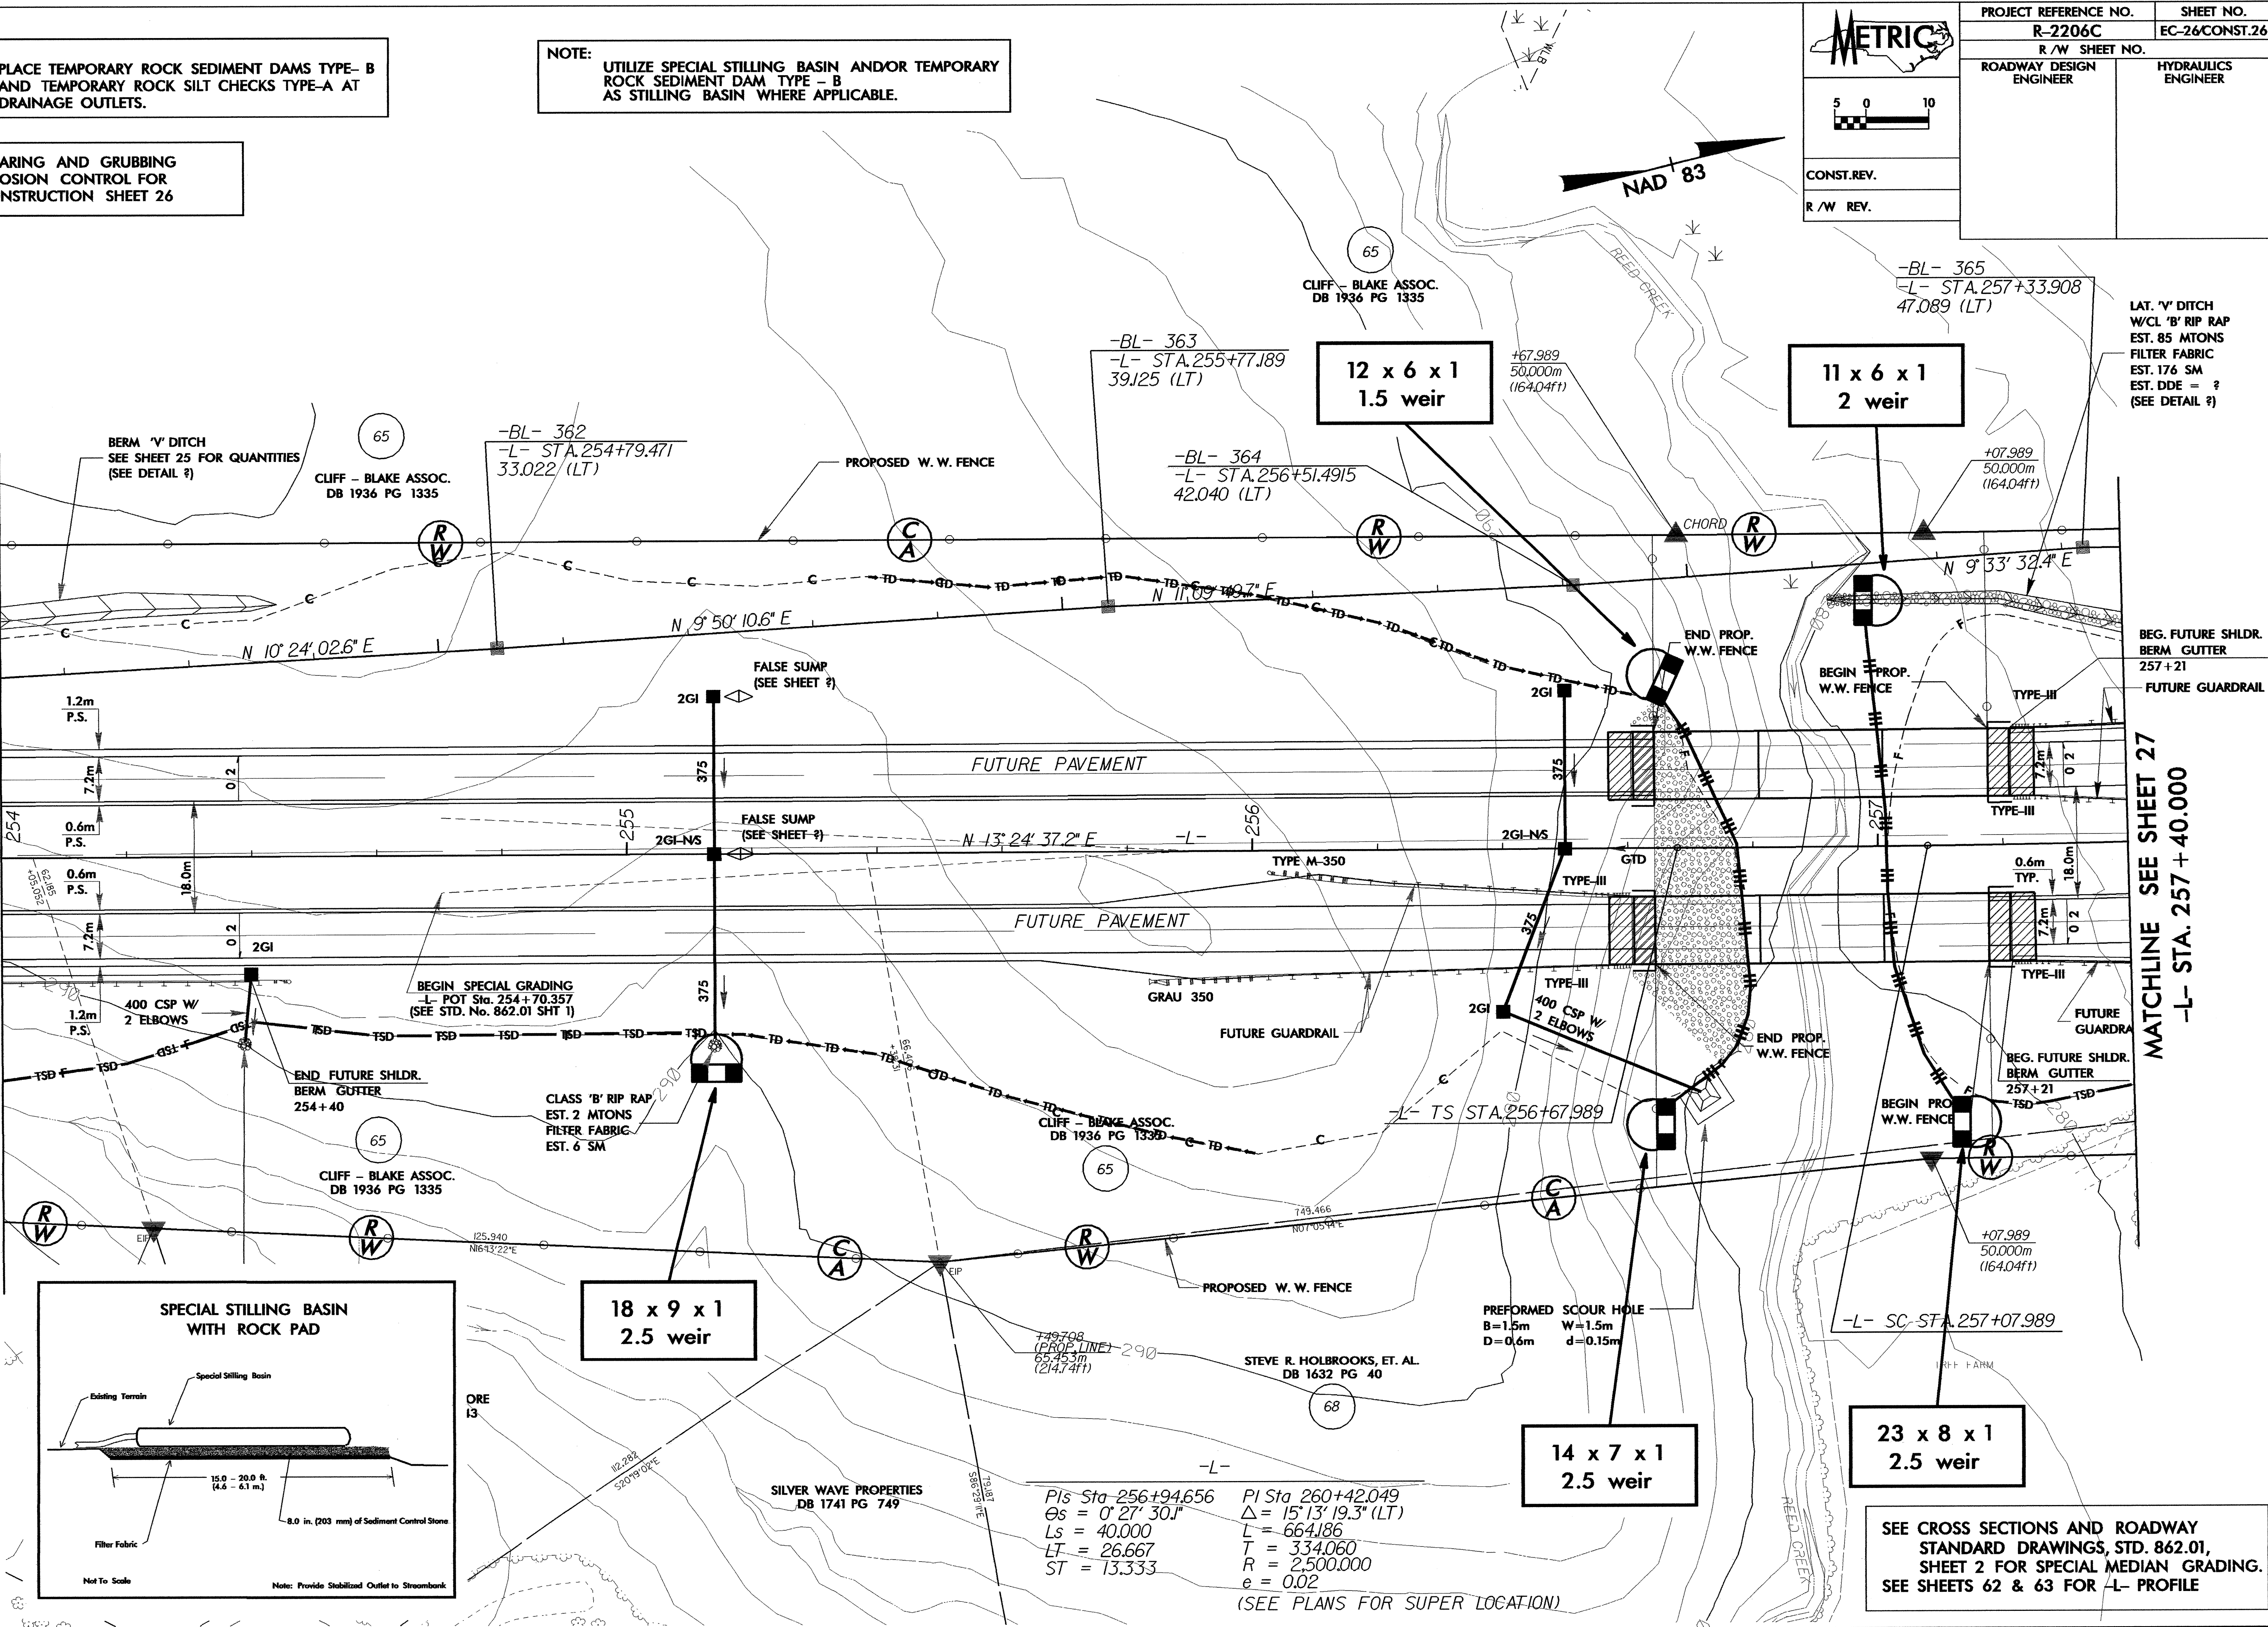

$Pis Sta 256+94.656$ $PI Sta 260+42.049$
 $Os = 0' 27' 30.1''$ $\Delta = 15' 13' 19.3'' (LT)$
 $Ls = 40.000$ $L = 664.86$
 $LT = 26.667$ $T = 334.060$
 $ST = 13.333$ $R = 2,500.000$
 $e = 0.02$
 (SEE PLANS FOR SUPER LOCATION)

SEE CROSS SECTIONS AND ROADWAY
STANDARD DRAWINGS, STD. 862.01,
SHEET 2 FOR SPECIAL MEDIAN GRADING.
SEE SHEETS 62 & 63 FOR -L- PROFILE