

PED 3 PROGRAMMING DETAIL

(program controller as shown below)

CHANGING OUTPUT ASSIGNMENTS

1. FROM MAIN MENU SELECT '6' (OUTPUTS), THEN '1' (OUTPUT ASSIGNMENTS)
2. ENTER 17 (PHASE 8 DW) FOR OUTPUT ASSIGNMENT #.
3. SCROLL DOWN TO 'PEDESTRIAN PHASE' AND ENTER 'Y' REGARDLESS OF DEFAULT PROGRAMMING
4. ENTER '3' FOR 'SELECT PEDESTRIAN PHASE'. NO CHANGE NEEDED FOR 'SELECT COLOR'
5. BACKUP TO 'OUTPUT ASSIGNMENTS AND SETTINGS MENU:' BY PRESSING THE 'ESC' BUTTON ON KEYBOARD.
6. SELECT '1' (OUTPUT ASSIGNMENTS)
7. ENTER 18 (PHASE 8 W) FOR OUTPUT ASSIGNMENT #.
8. REPEAT STEPS # 3 AND # 4.

CHANGING INPUT ASSIGNMENTS

1. FROM MAIN MENU SELECT '7' (DETECTORS), THEN '2' (PEDESTRIAN DETECTOR ASSIGNMENTS)
2. CYCLE TO PED DETECTOR #8 BY REPEATEDLY DEPRESSING '+' KEY
3. MODIFY PHASE ASSIGNED TO PED DETECTOR # 8 FROM PHASE 8 TO PHASE 3

PROGRAMMING COMPLETE

DYNAMIC BACK-UP CONTROL PROGRAMMING

(program controller as shown below)

1. From Main Menu press '2' (Phase Control), then '1' (Phase Control Functions). Scroll to the bottom of the menu and enable Dynamic/Backup Control Function 1.
2. From Phase Control Functions Menu press '2' (Dynamic/Backup Control Functions).

```

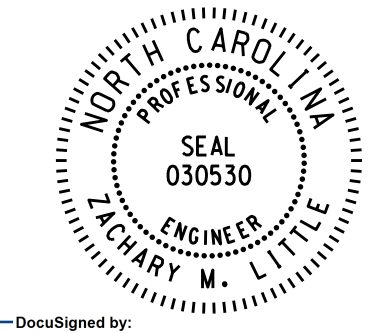
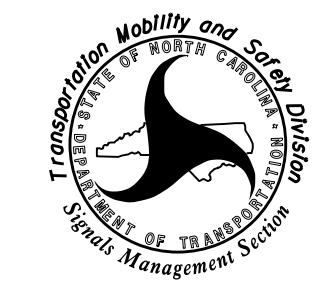

DYNAMIC/BACKUP CONTROL FUNCTION #01
                                OVERLAPS: ABCDEFGHIJKLMNOP
IF OVERLAPS ARE ACTIVE:
OR   PHASES: 12345678910111213141516
IF PHASES ARE ON: X
OMIT PHASES      : X
CALL PHASES      : X
    
```

BACKUP PROTECTION PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 13-0218
 DESIGNED: June 2016
 SEALED: 8/16/2016
 REVISED:

Electrical Detail - Sheet 3 of 5

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

ELECTRICAL AND PROGRAMMING DETAILS FOR:	US 19-23 Business/SR 3548 (Haywood Road) at I-240 Ramps/Hanover Street	SEAL 									
Prepared In the Offices of:  750 N. Greenfield Pkwy, Garner, NC 27529	Division 13 Buncombe County Asheville PLAN DATE: July 2016 REVIEWED BY: BAS PREPARED BY: C. Strickland REVIEWED BY:	DocuSigned by:  8/30/2016 DATE									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 60%;">REVISIONS</th> <th style="width: 20%;">INIT.</th> <th style="width: 20%;">DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		REVISIONS	INIT.	DATE							DocuSigned by: SIG. INVENTORY NO. 13-0218
REVISIONS	INIT.	DATE									

18-AUG-2016 13:25
 S:\PROJECTS\13-0218\SIGNAL\WORK\PROGRAMMING\130218-sm.e-xxr.dgn
 C:\STRICKLAND