

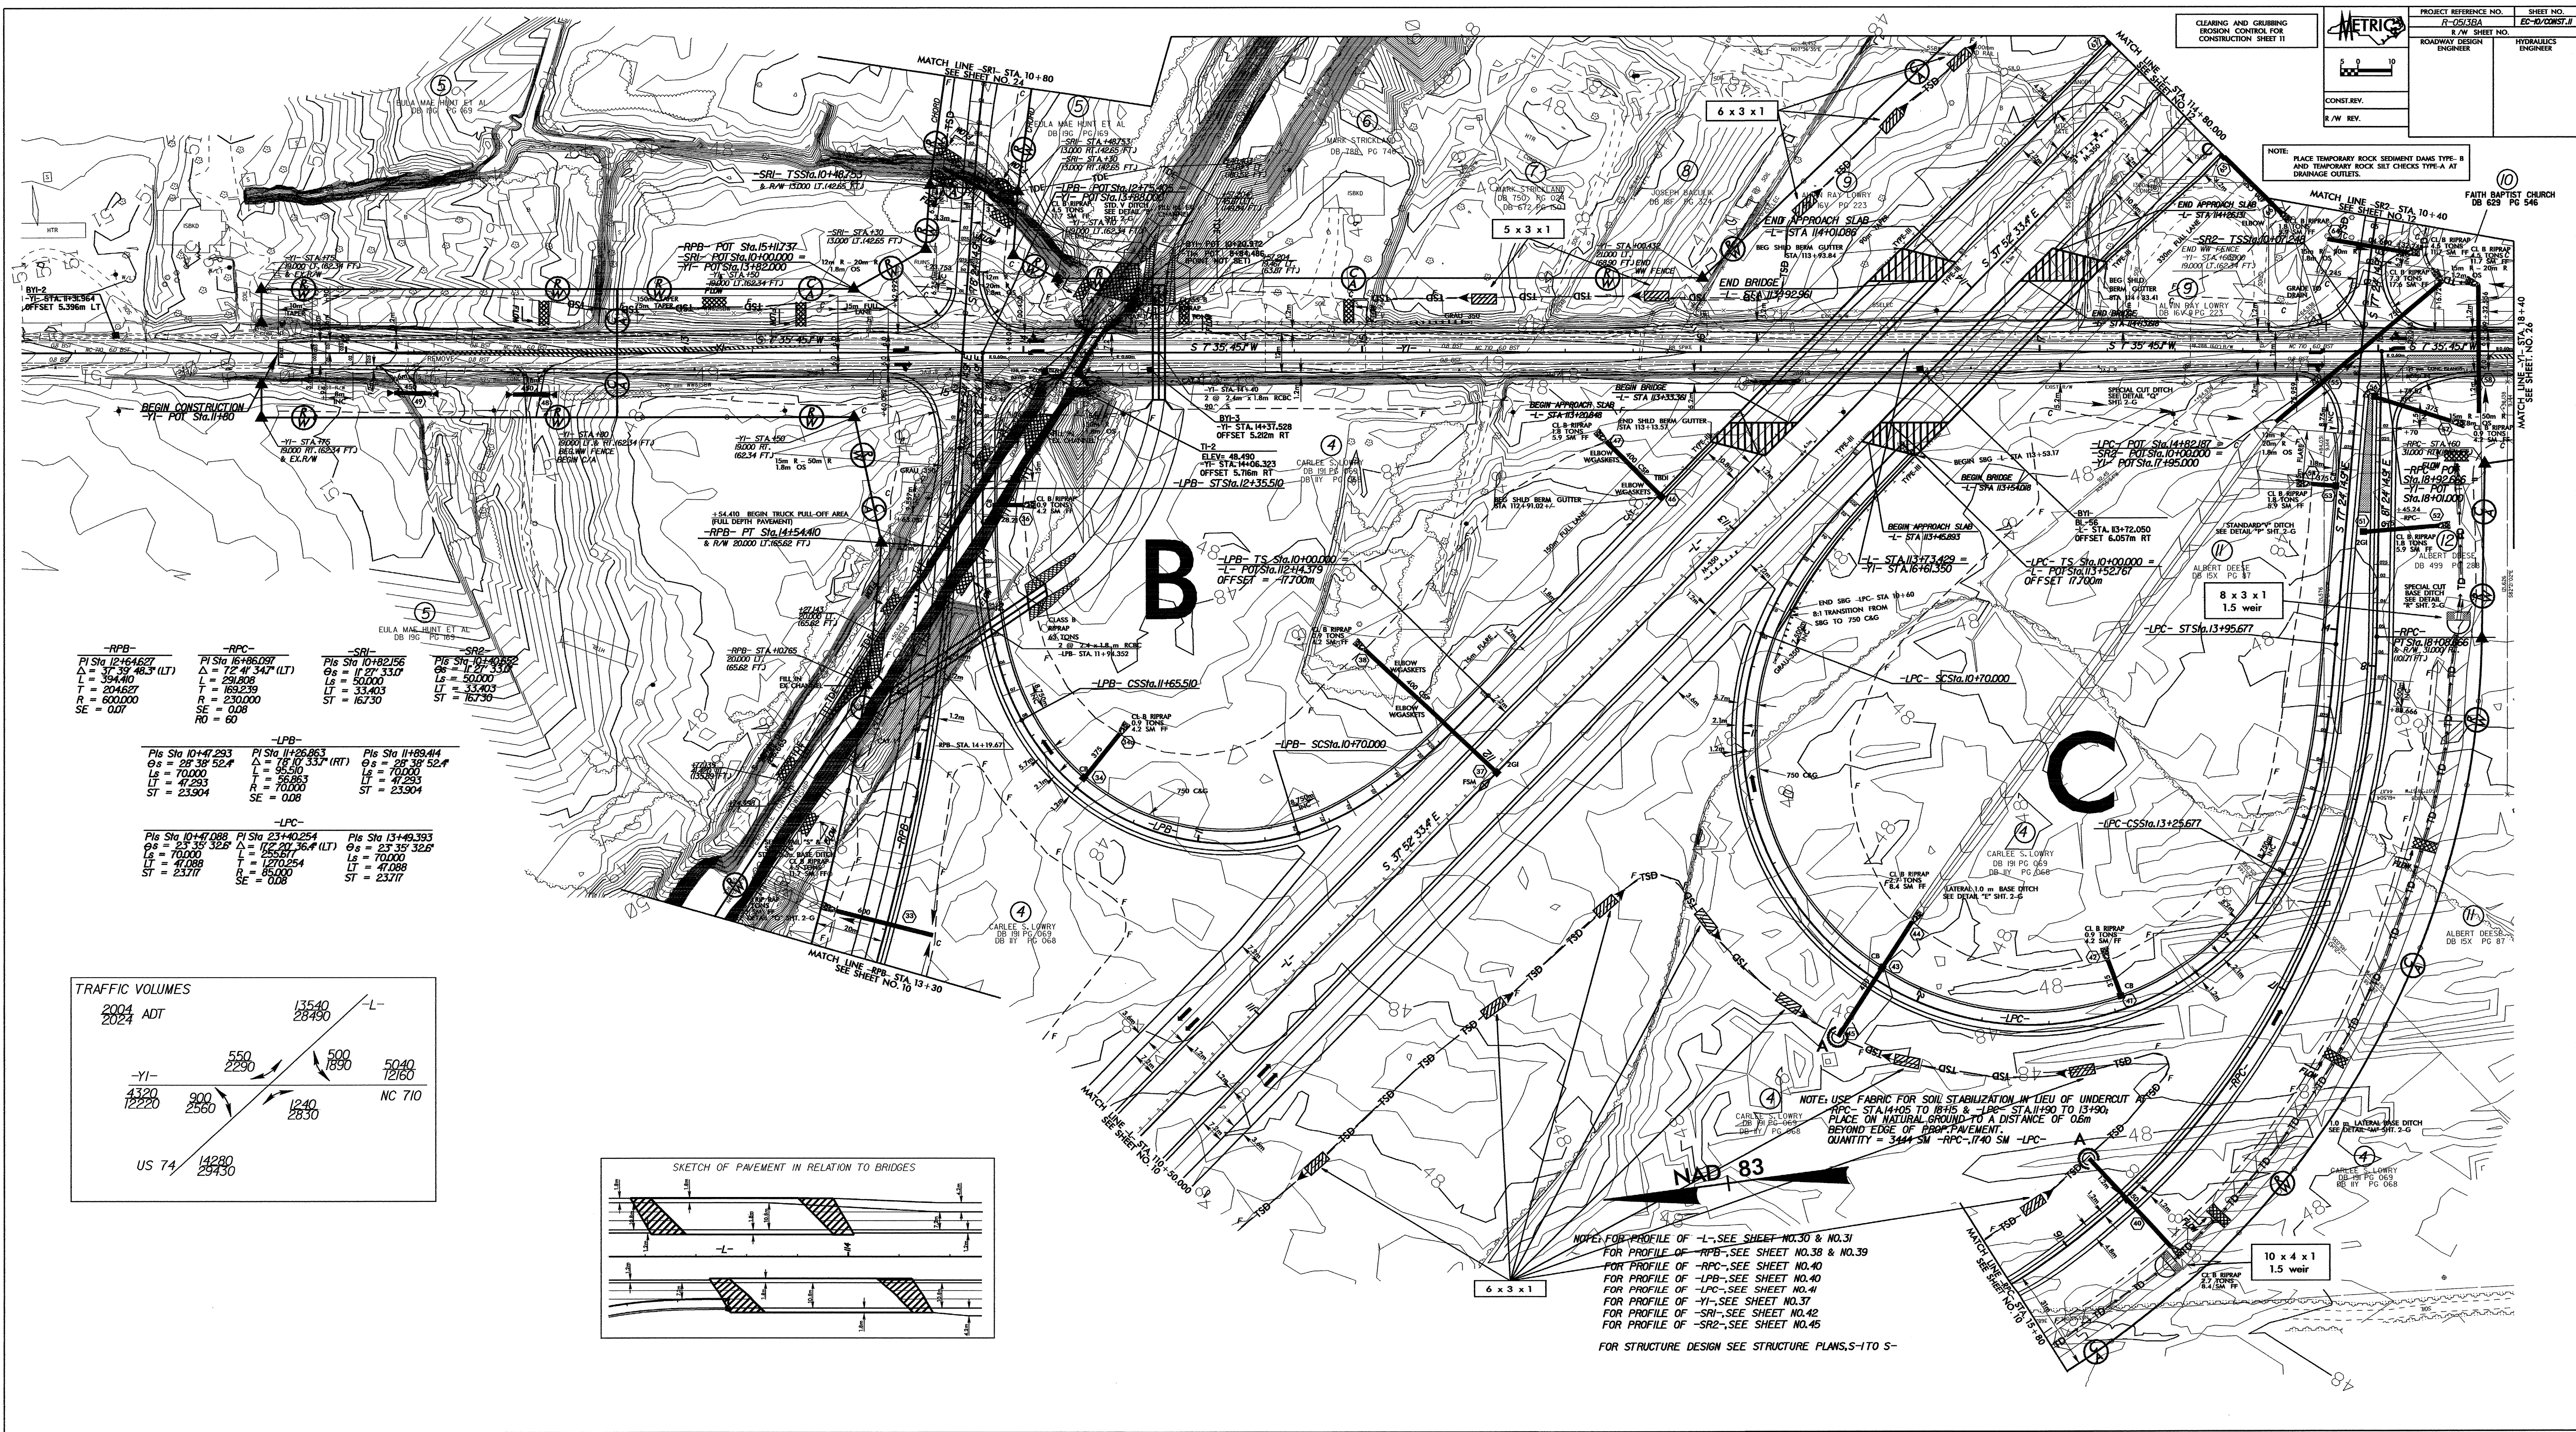


NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE CUTS.

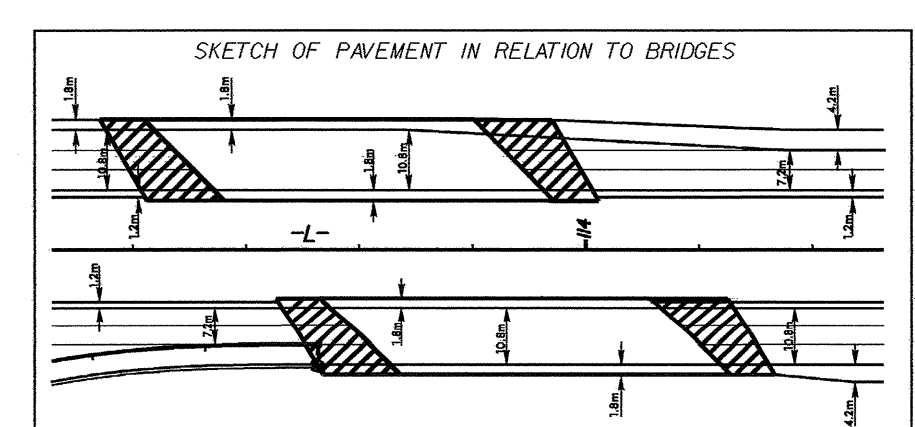

-RPB-		-RPC-		-SRI-		-LPC-	
PI Sta 12+64.627	PI Sta 16+96.097	PI Sta 10+82.156	PI Sta 11+49.393	PI Sta 10+82.156	PI Sta 11+49.393	PI Sta 10+82.156	PI Sta 11+49.393
$\Delta = 37^{\circ} 39' 46.3" (LT)$	$\Delta = 72^{\circ} 41' 34.7" (LT)$	$\Delta = 127^{\circ} 33.0'$	$\Delta = 28^{\circ} 38' 52.4"$	$\Delta = 127^{\circ} 33.0'$	$\Delta = 28^{\circ} 38' 52.4"$	$\Delta = 127^{\circ} 33.0'$	$\Delta = 28^{\circ} 38' 52.4"$
L = 394.40	L = 291.808	Ls = 50.000	Ls = 70.000	Ls = 50.000	Ls = 70.000	Ls = 50.000	Ls = 70.000
T = 204.857	T = 185.239	LT = 33.403	LT = 4.293	LT = 33.403	LT = 4.293	LT = 33.403	LT = 4.293
R = 600.000	R = 230.000	R = 70.000	R = 70.000	R = 70.000	R = 70.000	R = 70.000	R = 70.000
SE = 0.07	SE = 0.08	ST = 167.30	ST = 23.904	ST = 167.30	ST = 23.904	ST = 167.30	ST = 23.904
RI = 60	RI = 60	SE = 0.08	SE = 0.08	SE = 0.08	SE = 0.08	SE = 0.08	SE = 0.08

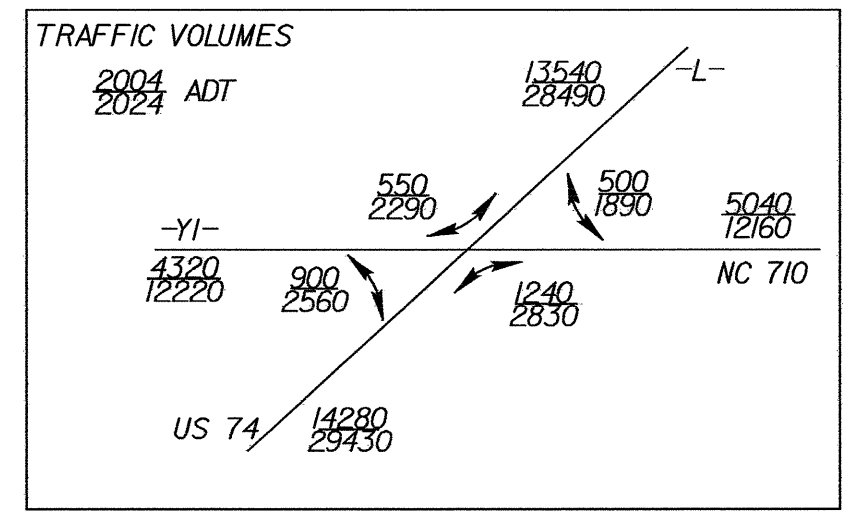

NOTE: USE FABRIC FOR SOIL STABILIZATION IN LIEU OF UNDERCUT
 -RPC- STA. 14+05 TO 16+15 & -LPC- STA. 11+90 TO 13+90
 PLACE ON NATURAL GROUND TO A DISTANCE OF 0.6m
 BEYOND EDGE OF ASPHALT PAVEMENT.
 QUANTITY = 344 SM -RPC- 1740 SM -LPC-

NOTE: FOR PROFILE OF -L- SEE SHEET NO. 30 & NO. 31
 FOR PROFILE OF -RPB- SEE SHEET NO. 38 & NO. 39
 FOR PROFILE OF -RPC- SEE SHEET NO. 40
 FOR PROFILE OF -LPC- SEE SHEET NO. 41
 FOR PROFILE OF -YI- SEE SHEET NO. 37
 FOR PROFILE OF -SRI- SEE SHEET NO. 42
 FOR PROFILE OF -SR2- SEE SHEET NO. 45

FOR STRUCTURE DESIGN SEE STRUCTURE PLANS, S-1 TO S-5