

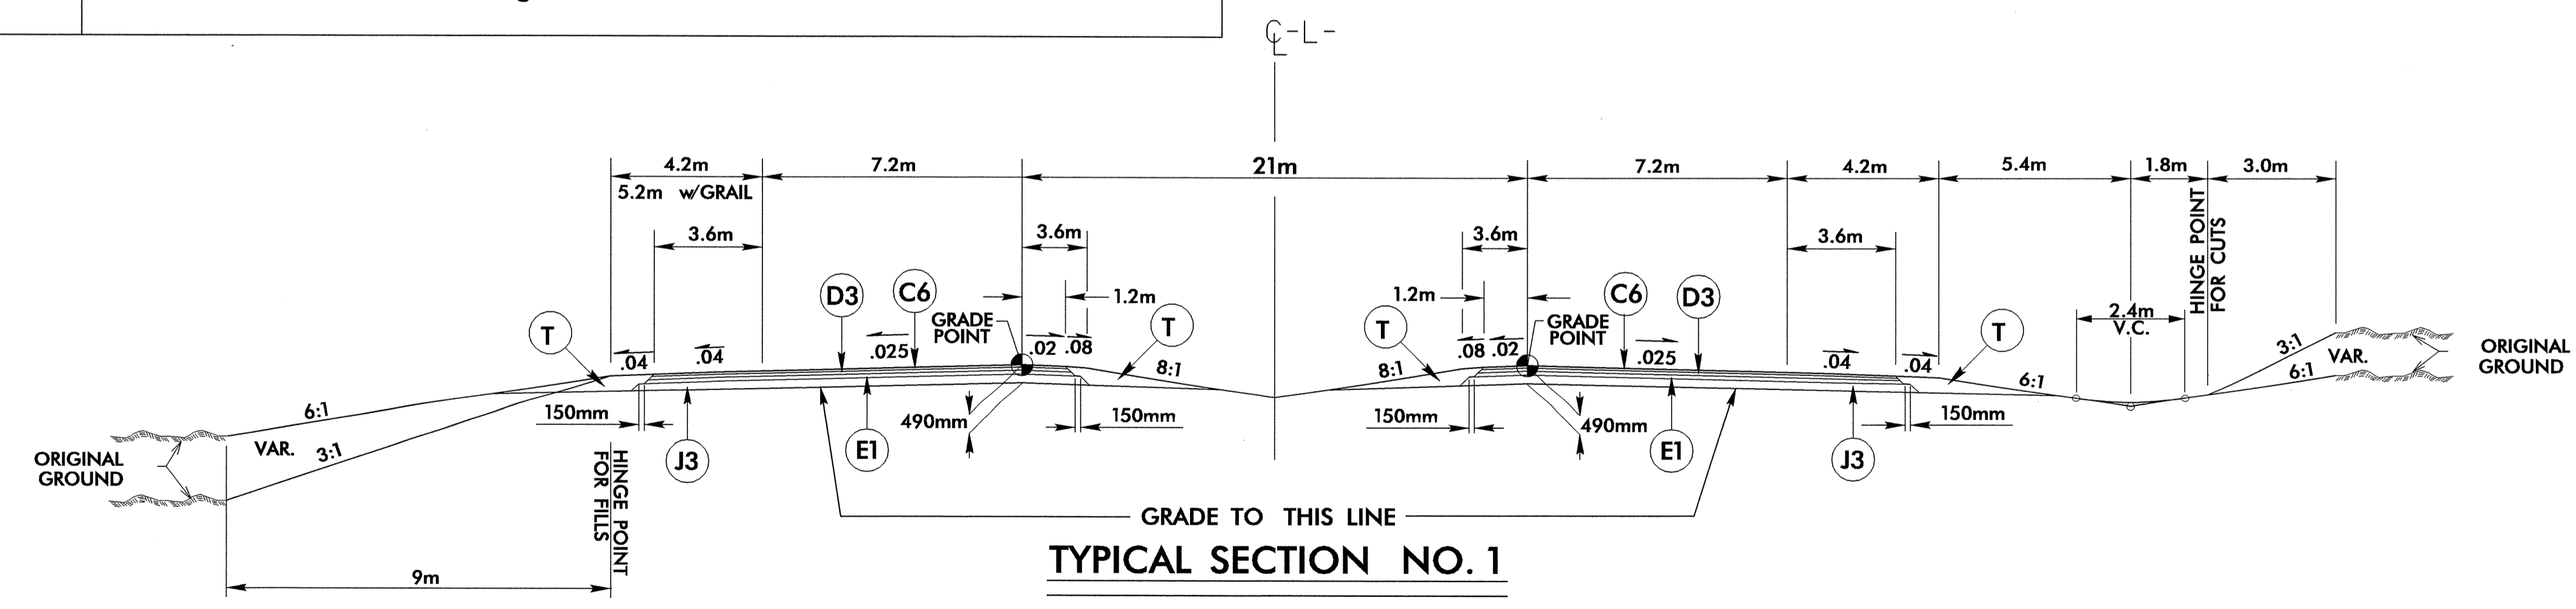


# FINAL PAVEMENT SCHEDULE

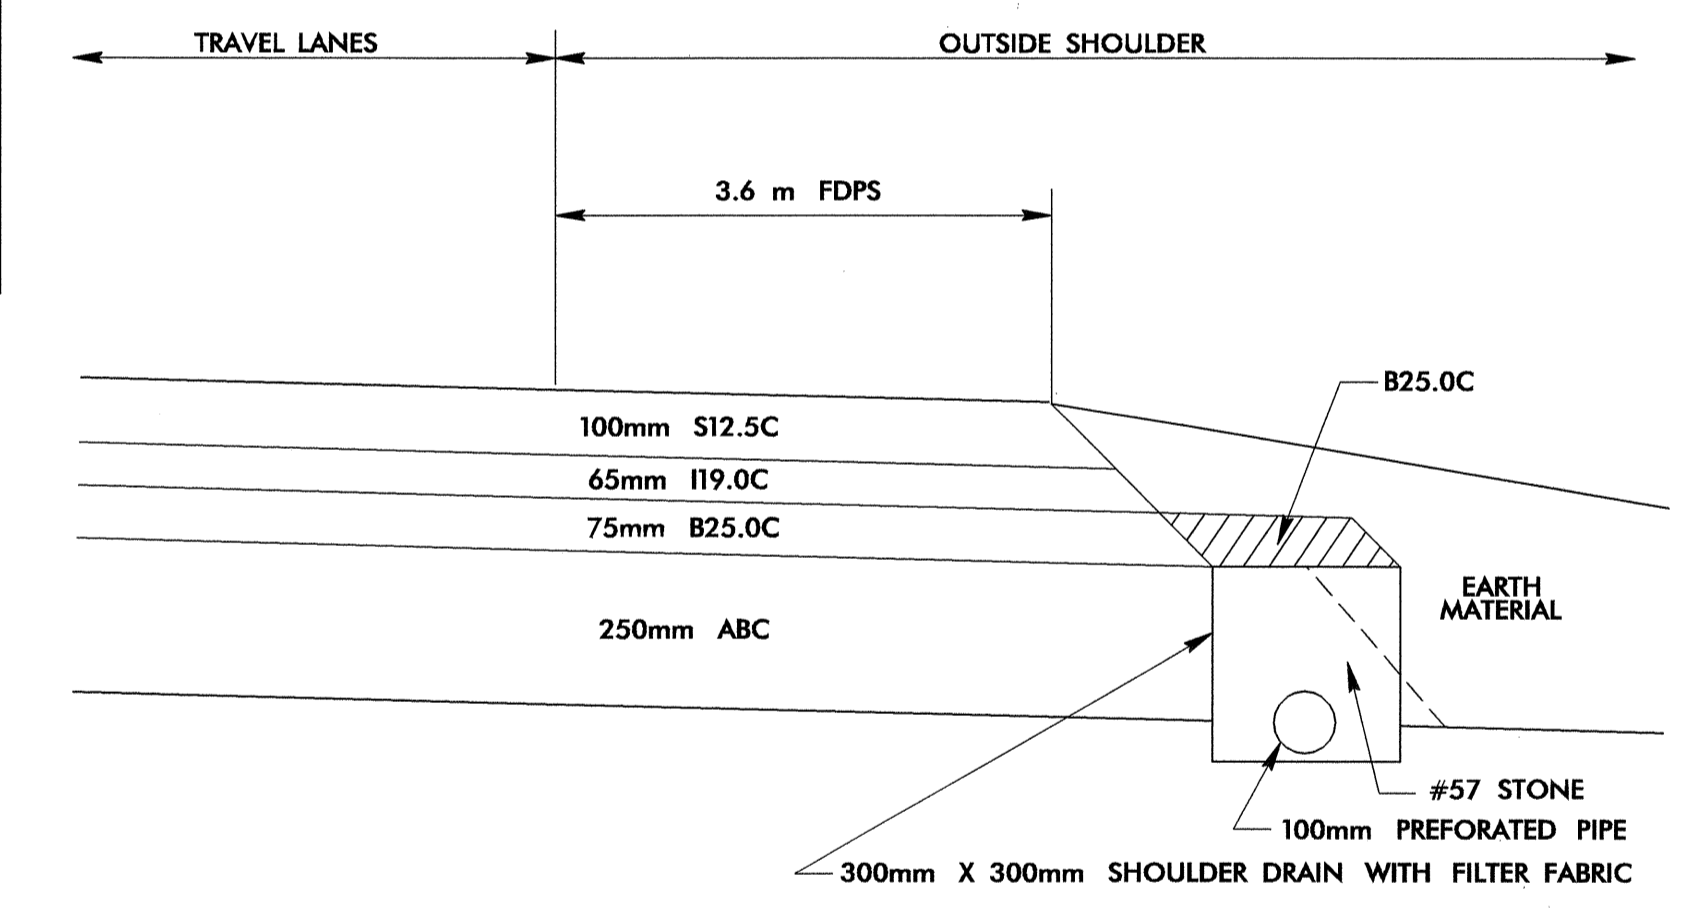

PROJECT REFERENCE NO. <i>R-0513BA</i>	SHEET NO. <i>2</i>
ROADWAY DESIGN ENGINEER	PAVEMENT DESIGN ENGINEER
 R. LOVELL 9-24-04	 CHI CHEN 9-21-04

C2	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS	E3	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 40 mm IN DEPTH.	J1	PROP. 150 mm AGGREGATE BASE COURSE.
C4	PROP. APPROX. 80 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 96 kg PER SQ. METER IN EACH OF TWO LAYERS	J3	PROP. 250 mm AGGREGATE BASE COURSE.
C5	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 40 mm IN DEPTH.	J4	PROP. VAR. DEPTH AGGREGATE BASE COURSE.
C6	PROP. APPROX. 100 mm ASPHALT CONC. SURFACE COURSE, TYPE S12.5C, AT AN AVERAGE RATE OF 120 kg PER SQ. METER IN EACH OF TWO LAYERS.	P	PRIME COAT
C7	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S12.5C, AT AN AVERAGE RATE OF 2.4 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 35 mm IN DEPTH OR GREATER THAN 60 mm IN DEPTH.	R1	750 mm CONCRETE CURB AND GUTTER.
D1	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.	T	EARTH MATERIAL.
D2	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH.	U	EXISTING PAVEMENT.
D3	PROP. APPROX. 65 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 159.25 kg PER SQ. METER.	W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE STANDARD WEDGING DETAIL)
D6	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH.	NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.	
E1	PROP. APPROX. 75 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER.		
E2	PROP. APPROX. 100 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 245 kg PER SQ. METER.		

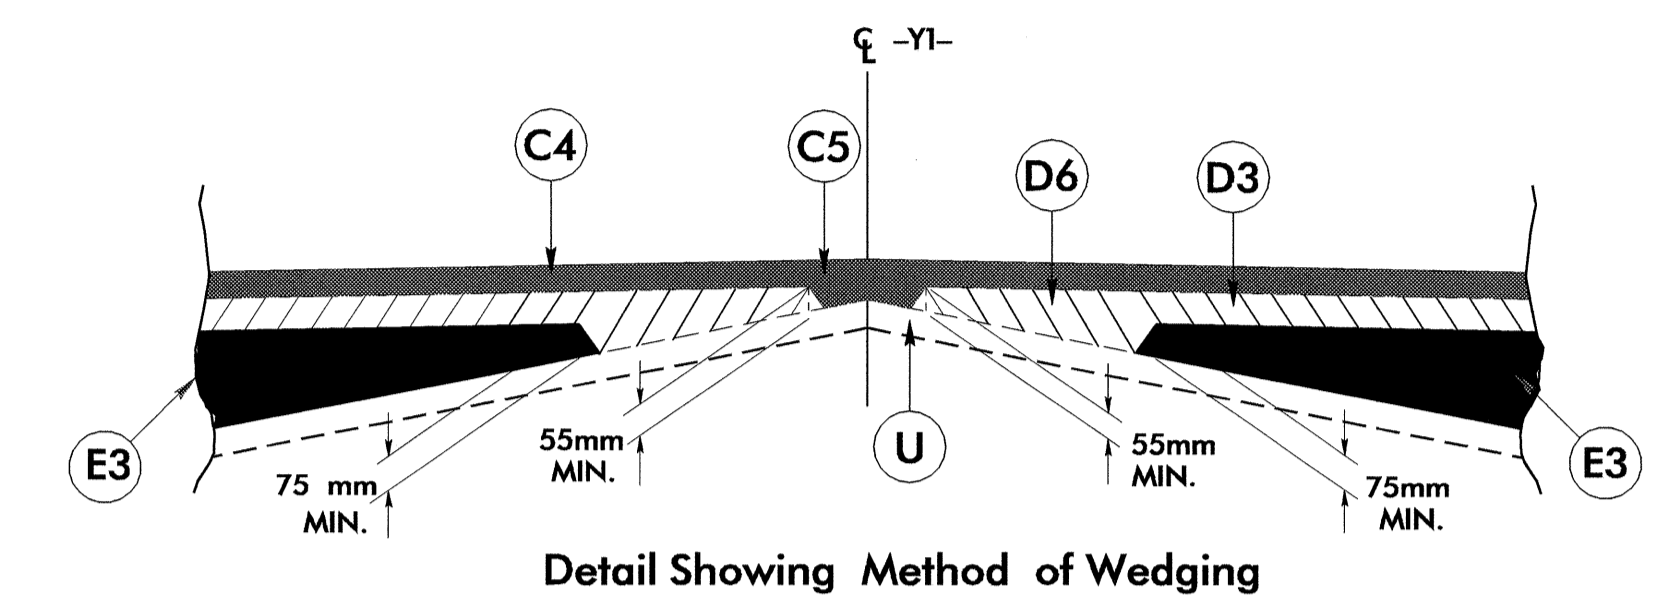

-L- Sta. 85+80 - Sta. 113+54.018 (BEGIN BRIDGE - EBL)  
 -L- Sta. 114+13.618 (END BRIDGE - EBL) - Sta. 138+09.823 (BEGIN BRIDGE - EBL)  
 -L- Sta. 138+60.823 (END BRIDGE - EBL) - Sta. 141+00.00  
 NOTE: TRANSITION FROM TYPICAL SECTION NO. 1 TO TYPICAL SECTION NO. 2  
 -L- Sta. 141+00 - Sta. 143+70

6/16/99  
 20-SEP-2004 13:50  
 mduval AT R068649