


EDI MODEL 2010ECL CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

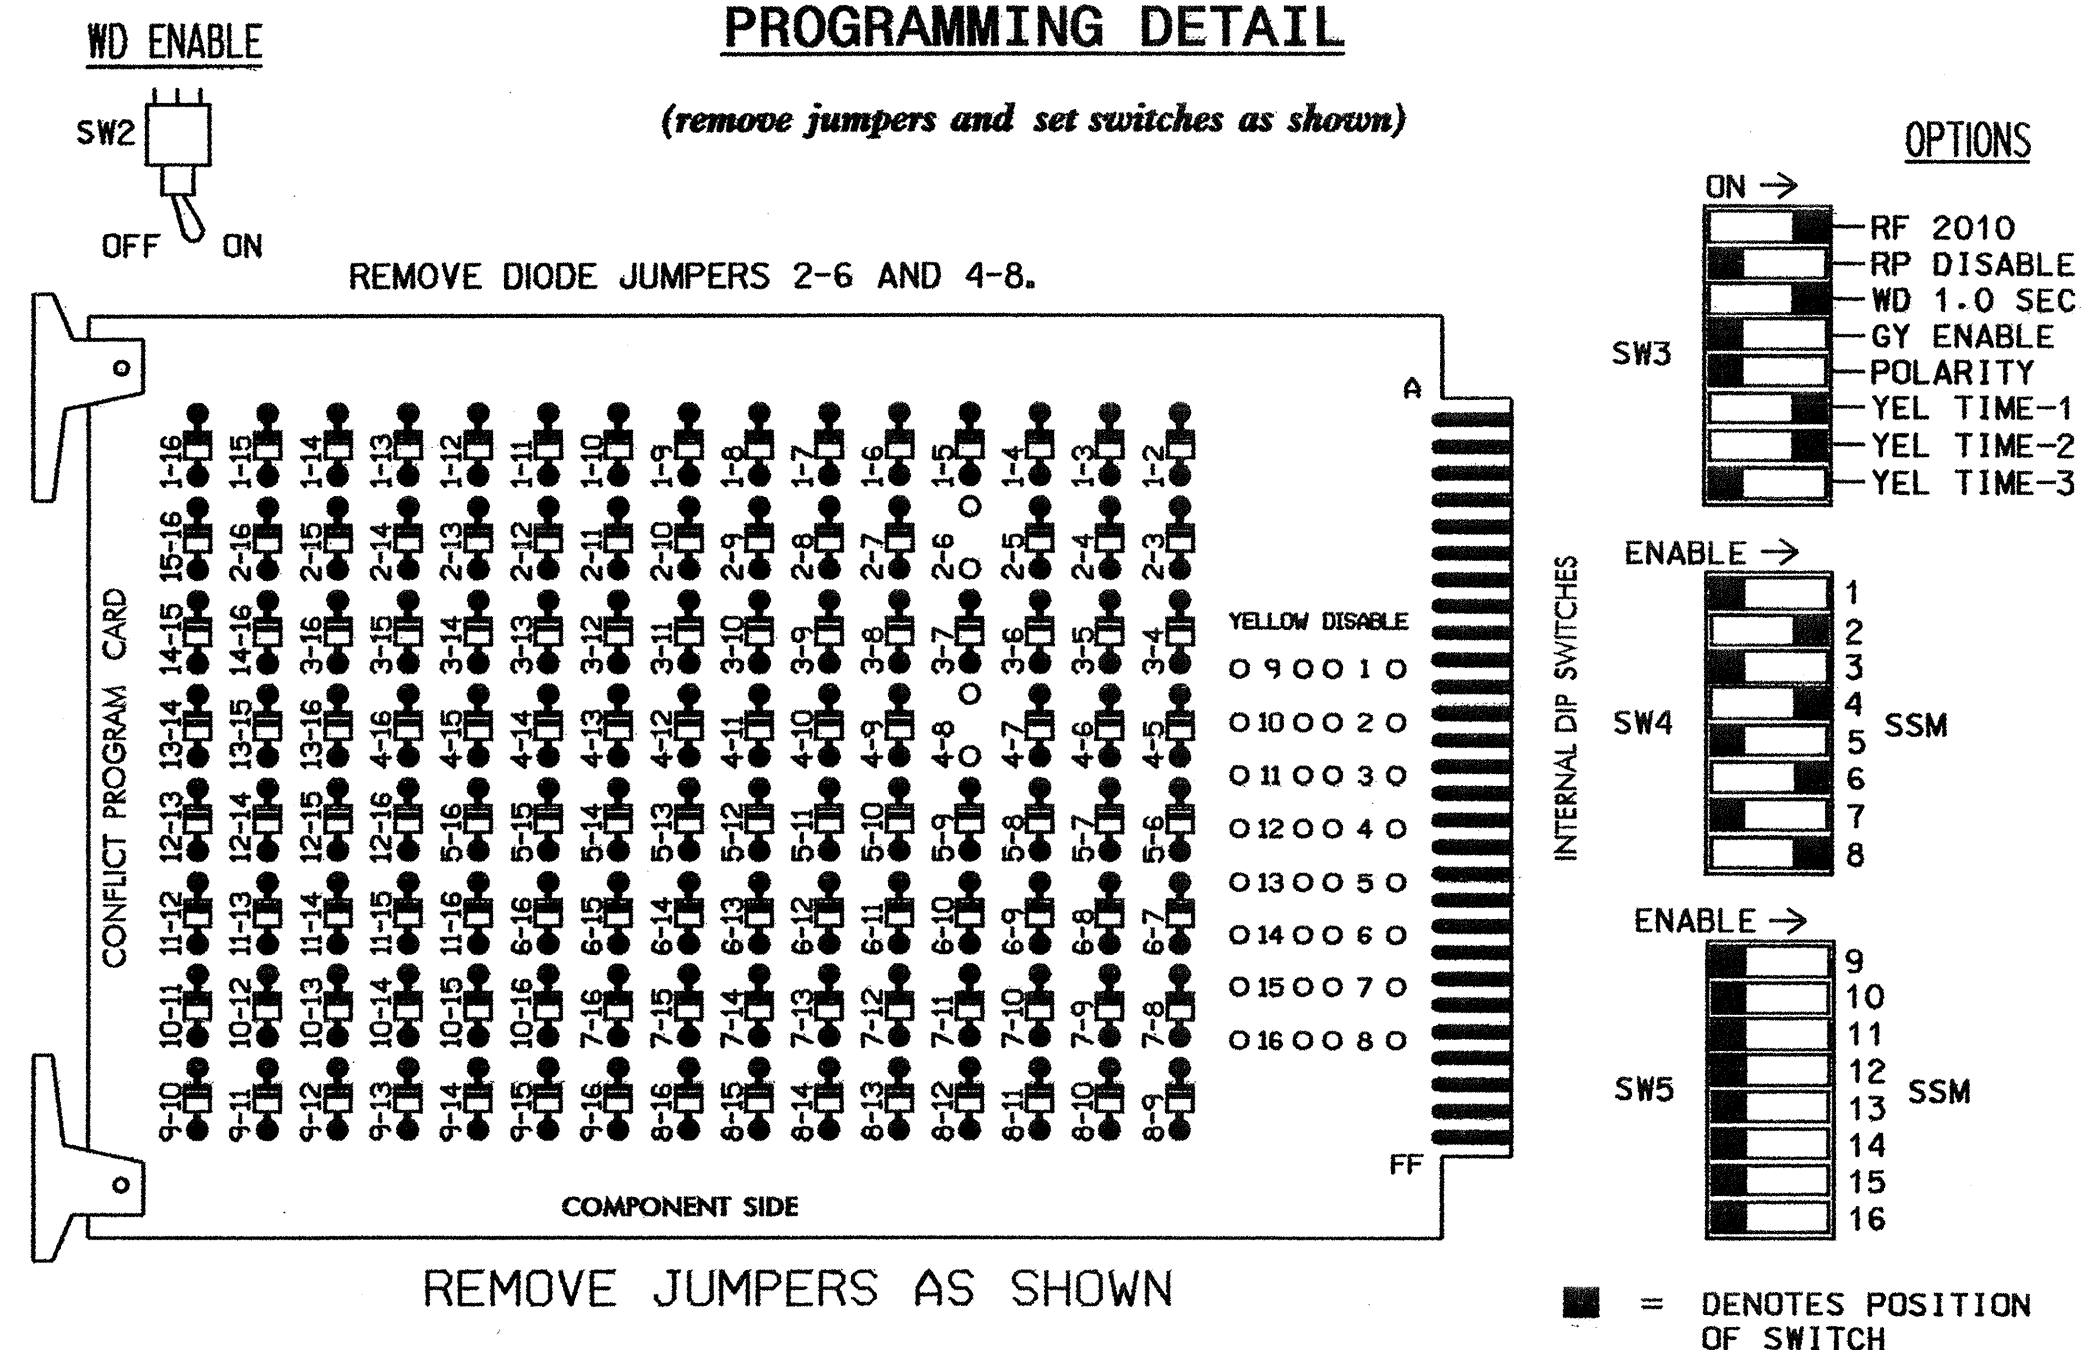

NOTES:

- CARD IS PROVIDED WITH ALL DIODE JUMPERS IN PLACE. REMOVAL OF ANY JUMPER ALLOWS ITS CHANNELS TO RUN CONCURRENTLY.
- MAKE SURE JUMPERS SEL1-SEL5 ARE PRESENT ON THE MONITOR BOARD.

NOTES

- TO PREVENT "FLASH-CONFLICT" PROBLEMS, INSERT RED FLASH PROGRAM BLOCKS FOR ALL UNUSED VEHICLE LOAD SWITCHES IN THE OUTPUT FILE. THE INSTALLER SHALL VERIFY THAT SIGNAL HEADS FLASH IN ACCORDANCE WITH THE SIGNAL PLANS.
- ENSURE THAT RED ENABLE IS ACTIVE AT ALL TIMES DURING NORMAL OPERATION. TO PREVENT RED FAILURES ON UNUSED MONITOR CHANNELS, TIE UNUSED RED MONITOR INPUTS 1,3,5,7,9,10,11,12,13,14,15 & 16 TO LOAD SWITCH AC+ PER THE CABINET MANUFACTURER'S INSTRUCTIONS.
- PROGRAM CONTROLLER TO START UP IN PHASES 2 AND 6 GREEN.
- ENABLE SIMULTANEOUS GAP-OUT FEATURE, ON CONTROLLER UNIT, FOR ALL PHASES.
- PROGRAM PHASES 4 AND 8, ON CONTROLLER UNIT, FOR DUAL ENTRY.
- IF AN APPROVED EQUIVALENT OF THE TC-26B MICROWAVE DETECTOR IS USED, DISREGARD ASSOCIATED WIRING DETAIL SHOWN ELSEWHERE ON THIS SHEET. INSTALL ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS. SENSOR SHALL BE WIRED SUCH THAT INPUT INTERFACE TO THE CONTROLLER IS ACHIEVED THROUGH ISOLATION CIRCUITRY.

EQUIPMENT INFORMATION

CONTROLLER.....CONTRACTOR SUPPLIED 2070L
 CABINETCONTRACTOR SUPPLIED 332
 SOFTWAREECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S2,S4,S6,S8
 PHASES USED.....2,4,6,8
 OVERLAPS.....NONE


FIELD CONNECTION HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	NU	21,22	NU	NU	41 42,43	NU	NU	61,62	NU	NU	81 82,83	NU
GREEN		130			103			136			109	
YELLOW		129			102			135			108	
RED		128			101			134			107	
RED ARROW												
YELLOW ARROW												
GREEN ARROW												

NU = NOT USED

INPUT FILE POSITION LAYOUT

(front view)

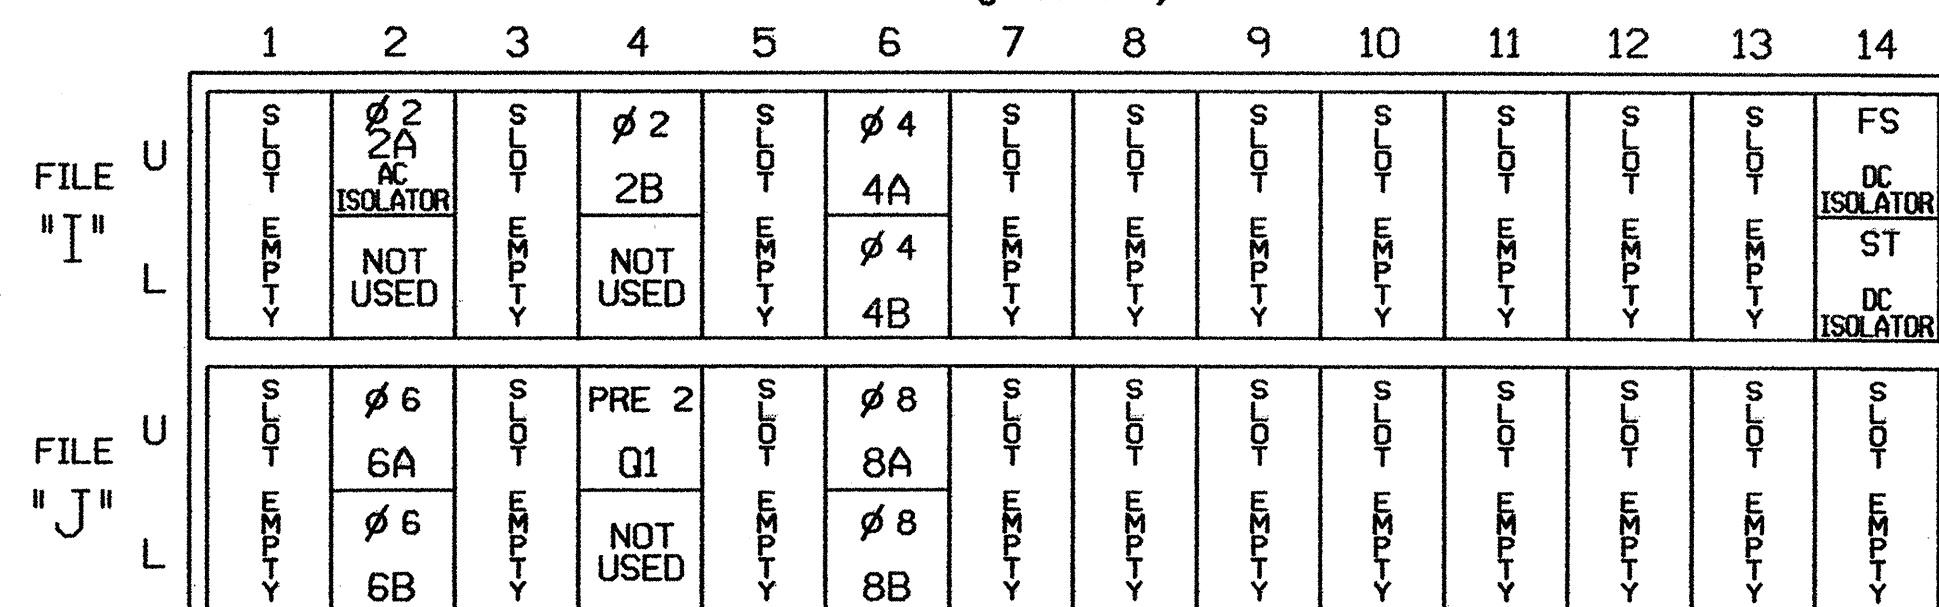


EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
2A	*	I2U	39	1	2	2	Y	Y		1.8	
2B	TB4-1,2	I4U	47	9	22	2	Y	Y			
4A	TB4-9,10	I6U	41	3	4	4	Y	Y			
4B	TB4-11,12	I6L	45	7	14	4	Y	Y			15
6A	TB3-5,6	J2U	40	2	6	6	Y	Y		1.8	
6B	TB3-7,8	J2L	44	6	16	6	Y	Y			
Q1	TB5-1,2	J4U	48	10	26	PRE 2					
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			3
8B	TB5-11,12	J6L	46	8	18	8	Y	Y			15

* MICROWAVE DETECTOR. SEE WIRING DETAIL (MICROWAVE DETECTOR).
 INPUT FILE POSITION LEGEND: J2L

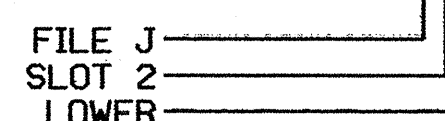

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 09-0763 T1
 DESIGNED: APRIL 2004
 SEALED: 07-01-04
 REVISED:

TEMPORARY SIGNAL 1 - SHEET 1 OF 2

ELECTRICAL AND PROGRAMMING DETAILS FOR:

SR 1101 (HARPER ROAD) AT I-40 WB EXIT RAMP A AND SR 1100 (FAIR OAKS ROAD)

Prepared in the Offices of: *(Logo)*

SEAL: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 022013 GEORGE C. BROWN

DIVISION 08 FORSYTH COUNTY CLEMMONS

PLAN DATE: JUNE 2004 REVIEWED BY: *(Signature)*

PREPARED BY: JAMES PETERSON REVIEWED BY:

REVISIONS: INIT. DATE

Signature: *(Signature)* DATE: 7/12/04

SIG. INVENTORY NO. 09-0763 T1