
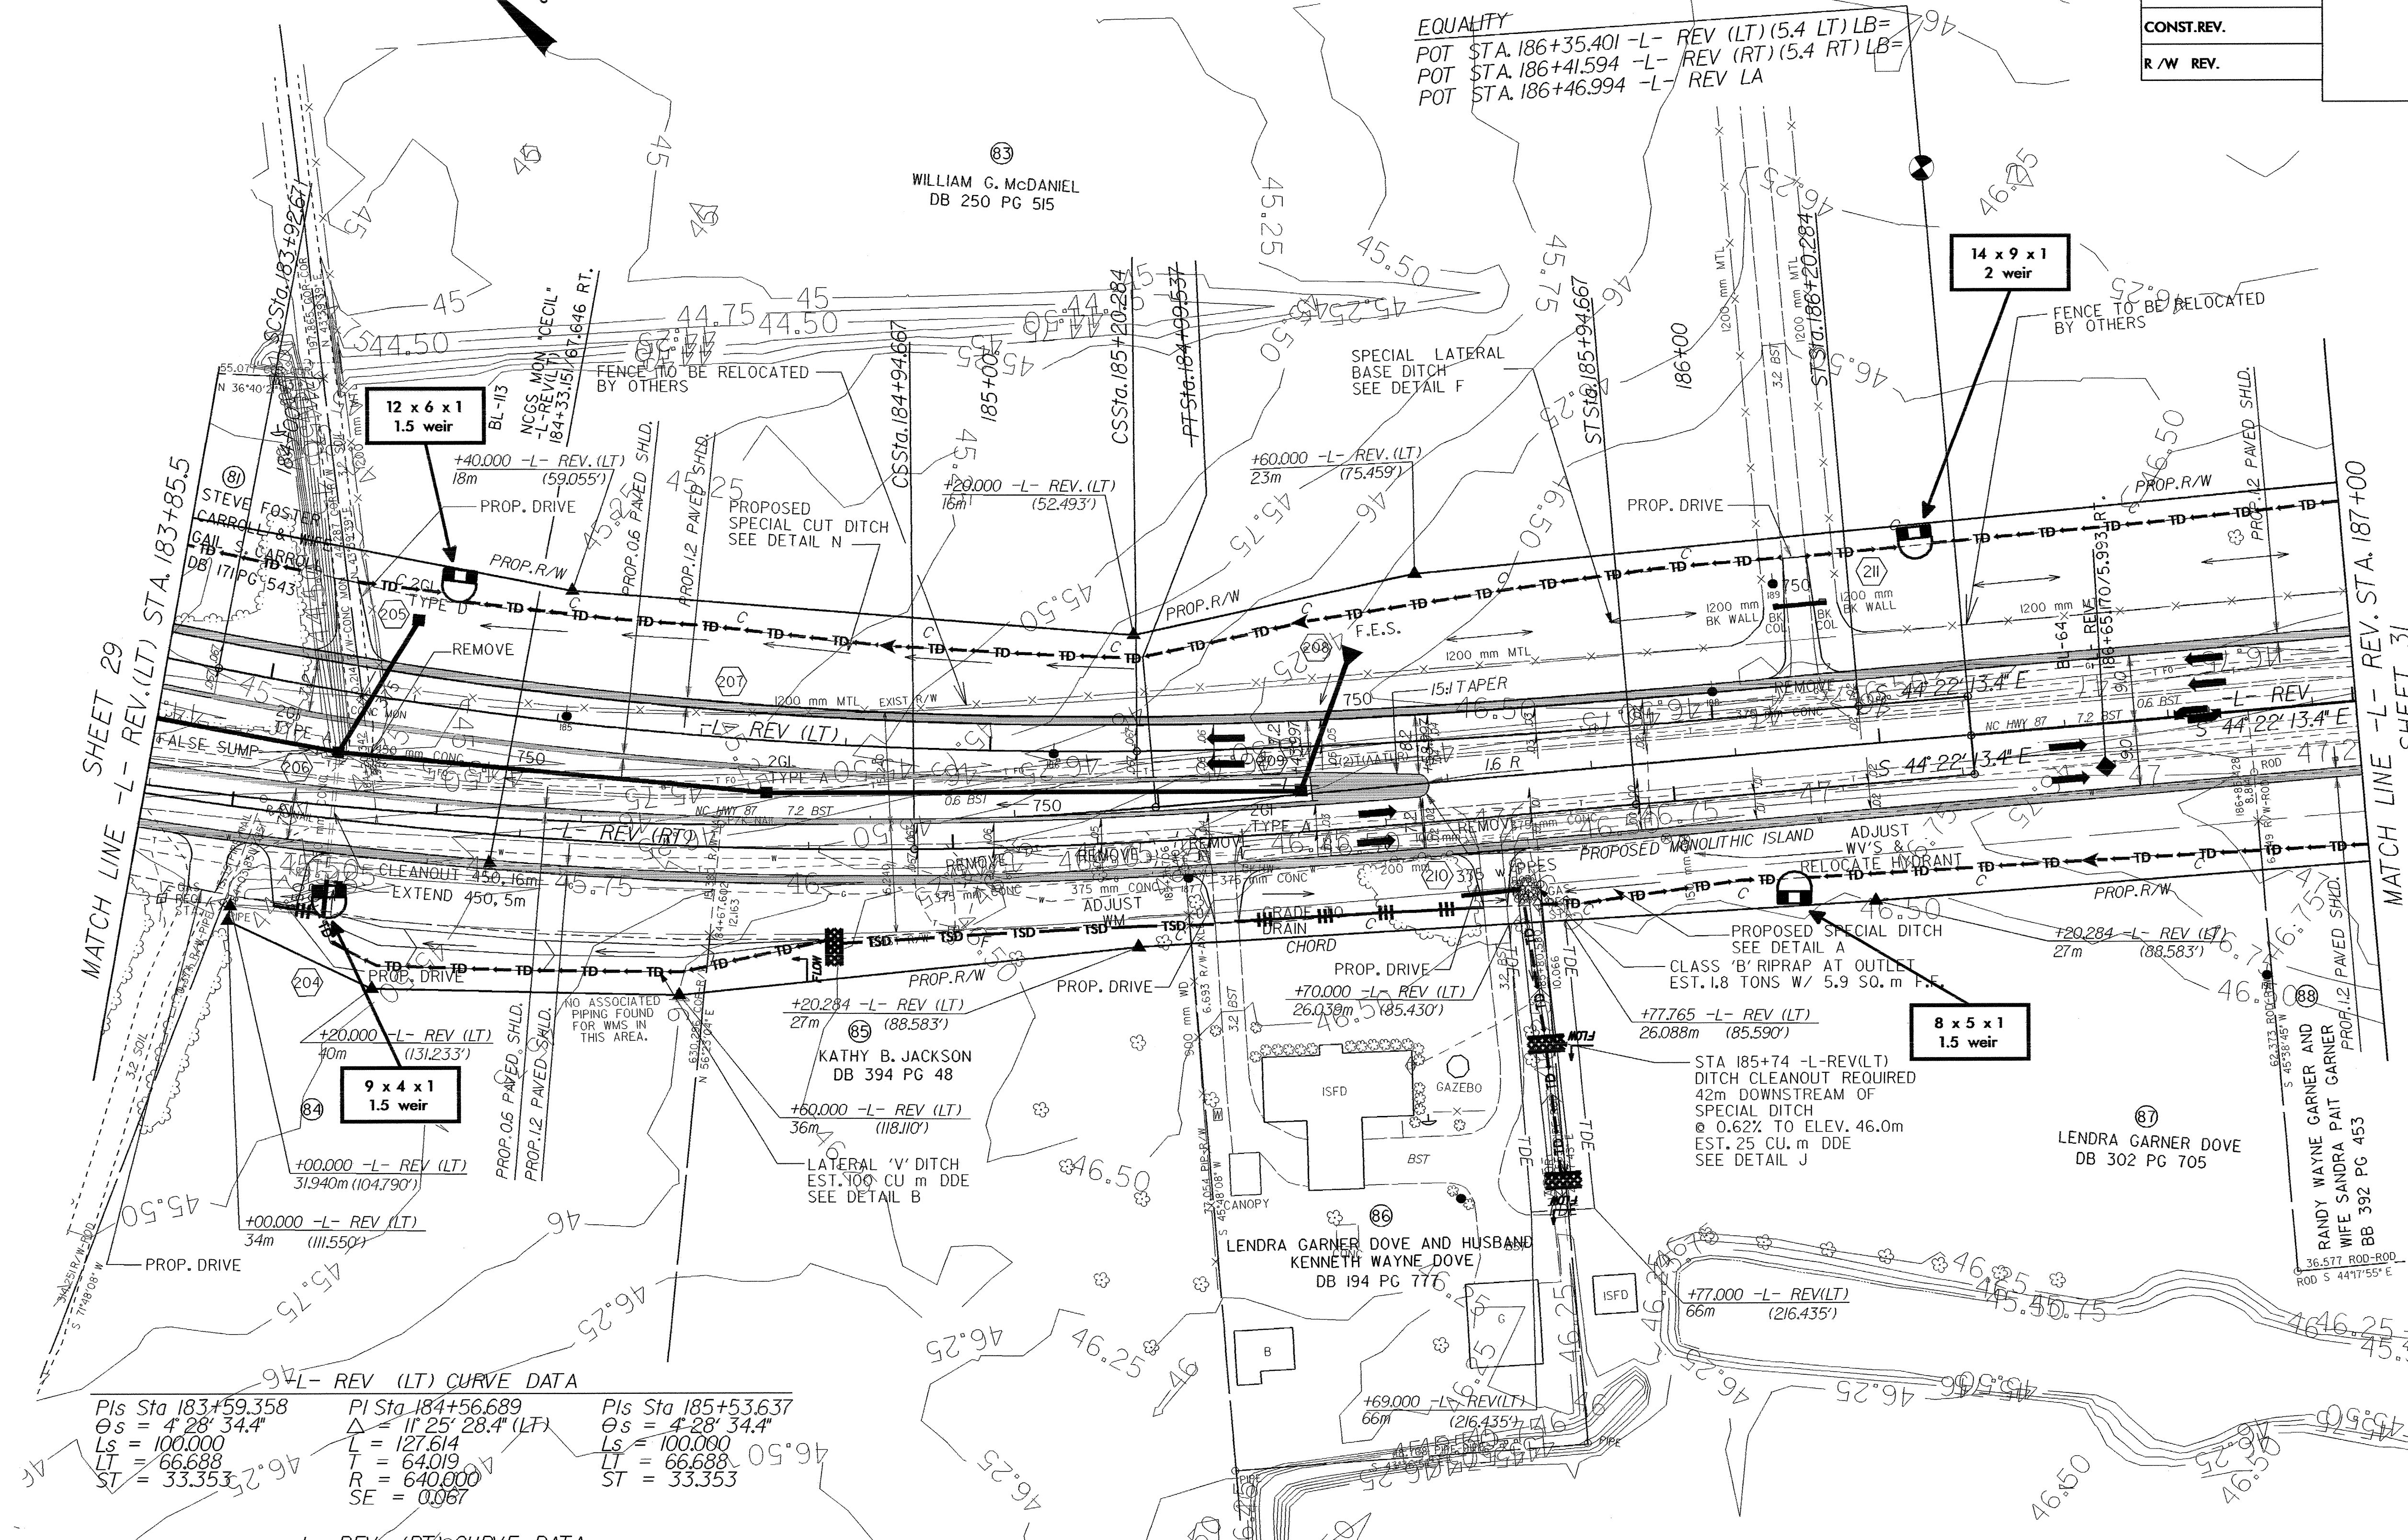


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 30

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT
DRAINAGE OUTLETS.

 5m 0 10m CONST. REV. R/W REV.	PROJECT REFERENCE NO. R-2562C	SHEET NO. EC-33/CONST.30
	R/W SHEET NO.	HYDRAULICS ENGINEER



-L- REV (LT) CURVE DATA

Pls Sta 183+59.358 θs = 4° 28' 34.4" Ls = 100.000 LT = 66.688 ST = 33.353	Pls Sta 184+56.689 Δ = 11° 25' 28.4" (LT) L = 127.614 T = 64.019 R = 640.000 SE = 0.067	Pls Sta 185+53.637 θs = 4° 28' 34.4" Ls = 100.000 LT = 66.688 ST = 33.353
---	--	---

-L- REV (RT) CURVE DATA

Pls Sta 183+33.742 θs = 4° 28' 34.4" Ls = 100.000 LT = 66.688 ST = 33.353	Pls Sta 184+31.073 Δ = 11° 25' 28.4" (LT) L = 127.614 T = 64.019 R = 640.000 SE = 0.067	Pls Sta 185+28.020 θs = 4° 28' 34.4" Ls = 100.000 LT = 66.688 ST = 33.353
---	--	---

- DRIVEWAY NOTES:**
1. ALL PROP. DRIVEWAY RADII 3.0m UNLESS OTHERWISE SHOWN.
 2. PROP. DRIVEWAY WIDTHS AT END OF RADII SHALL BE 4.9m MIN. UNLESS OTHERWISE SHOWN. TAPER DRIVEWAY TO EXISTING DRIVEWAY WIDTH.

SEE SHEET 45 FOR -L- REV. PROFILE

28-OCT-2004 10:00 Roadway (proj) 2562c.s30.plt
 d:\REU\11\p\proj\2562c\2562c.dwg
 08.25.25