

RAILROAD PREEMPTION PROGRAMMING DETAIL
(program controller as shown below)


FROM MAIN MENU PRESS 'A' (PREEMPTION), THEN '1' (STANDARD PREEMPTIONS).

PREEMPTION #1	SETTINGS (NEXT:1-10)	CLEAR/DWELL PHASES
INTERVAL/TIMING		
GRN YEL RED		12345678910111213141516
1	0 0.0 0.0	
2	255 0.0 0.0	
3	0 0.0 0.0	
4	0 0.0 0.0	
5	1 0.0 0.0	X X

EXIT CALLS	OPTIONS
PRIORITY (Y/N TO SELECT)	HIGH
DELAY TIMER (0-255 SEC)	0
MIN GREEN BEFORE PRE (0= DEFAULT)....	1
PED CLEAR BEFORE PRE (0= DEFAULT)....	0
YELLOW CLEAR BEFORE PRE (0= DEFAULT)....	0
RED CLEAR BEFORE PRE (0= DEFAULT)....	0
DWELL MIN TIMER (0-255 SEC)	7
DWELL MAX TIMER (0=OFF,1-255MIN)	0
DWELL HOLD-OVER TIMER (0-255)	0
LATCH CALL?	N
LINK TO NEXT PREEMPT?	N
ENABLE BACKUP PROTECTION?	N
HOLD CLEAR 1 PHASES DURING DELAY? ...	N
FAST GREEN FLASH DWELL PHASES?	N
PED CLEARANCE THROUGH YELLOW?	N
INHIBIT OVERLAP GREEN EXTENSION?	N
SERVICE DURING SOFTWARE FLASH?	N
REST IN RED DURING DWELL INTERVAL? ..	Y
FLASH DWELL INTERVAL?	N
ALLOW PEDS IN DWELL INTERVAL?	N
RE-TIME DWELL INTERVAL?	Y
OVERLAPS:	ABCDEFGHIJKLMNPO
DWELL INT FLASH YELLOW	
OMIT OVERLAPS:	X

RAILROAD PREEMPTION WIRING DETAIL


(wire as shown below)

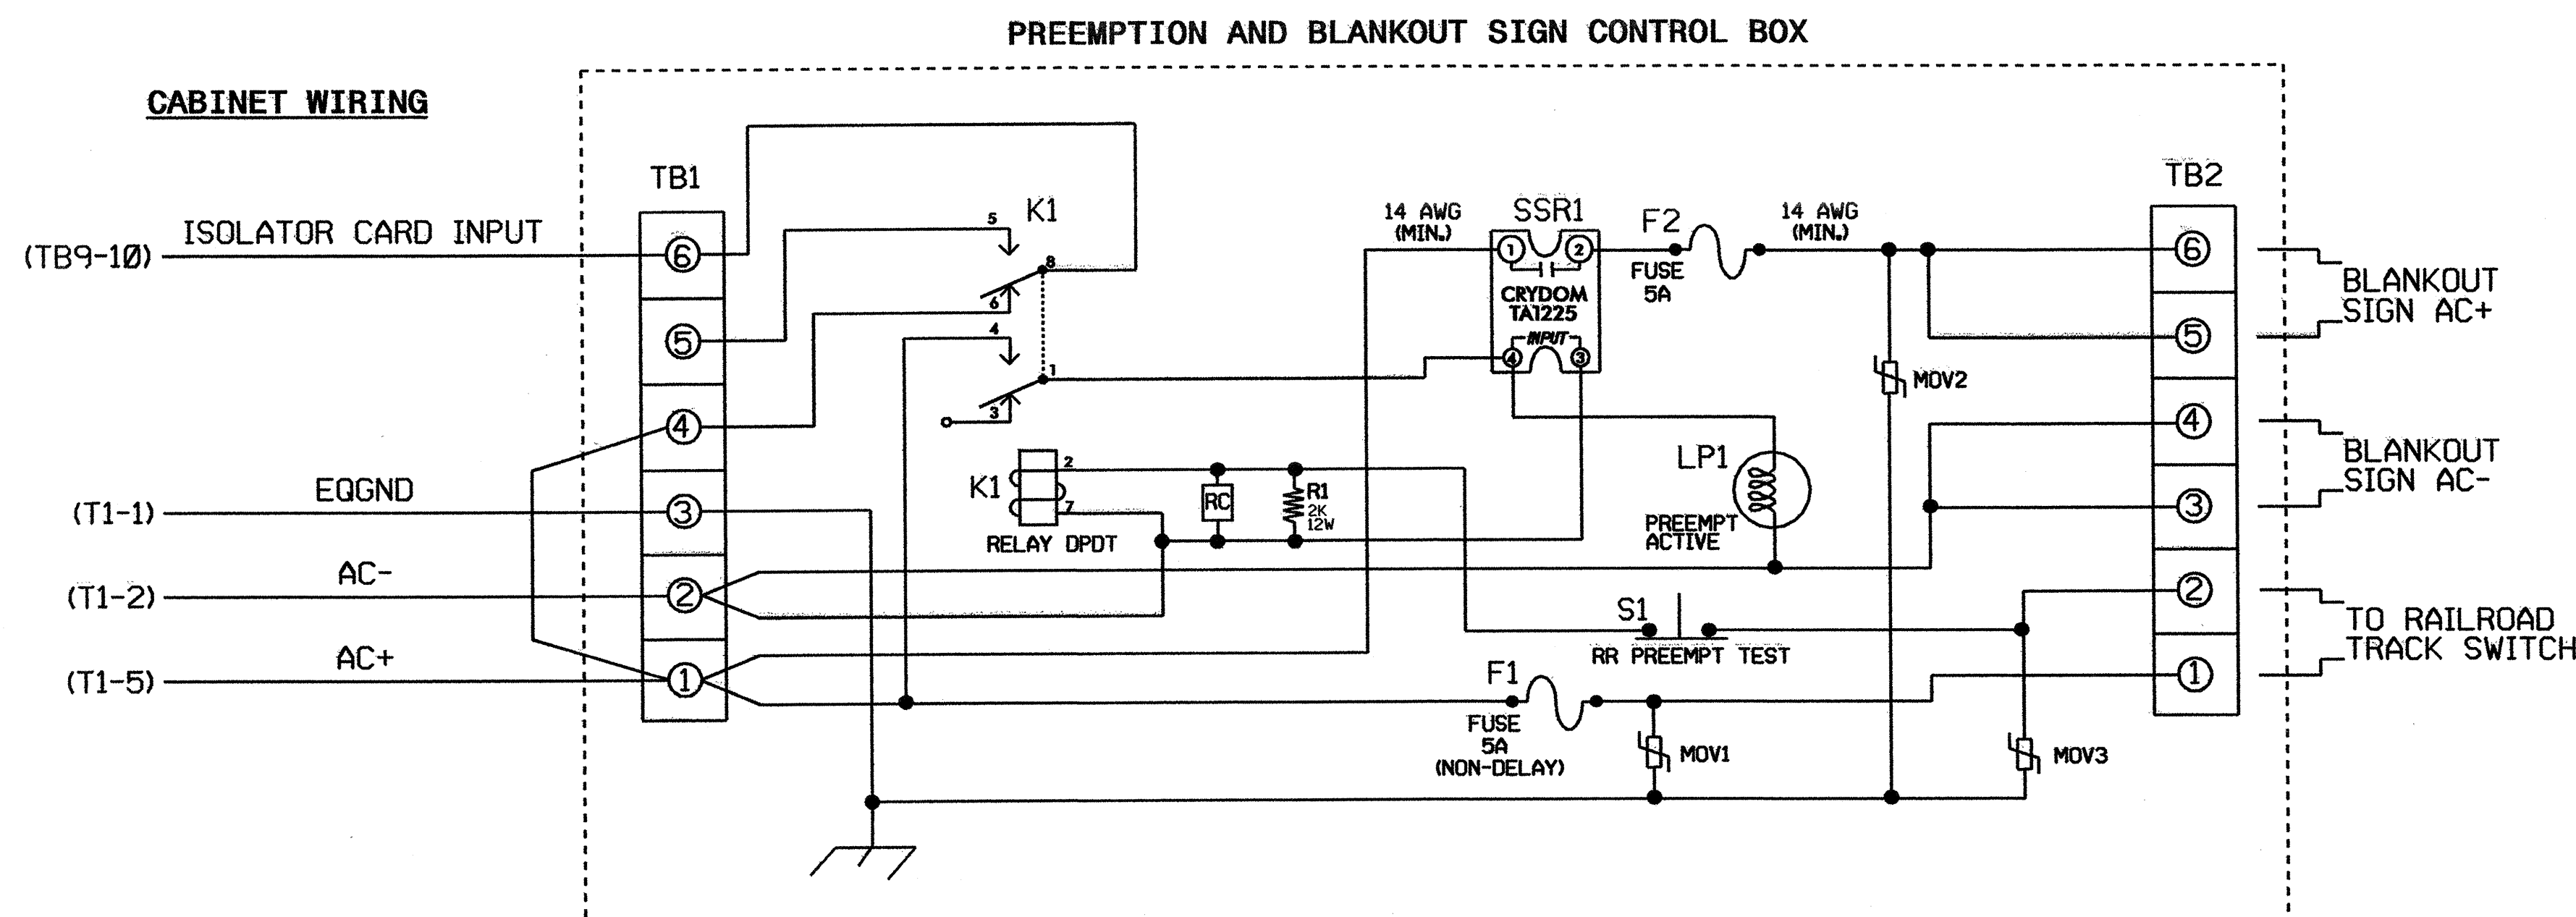

NOTES

- RELAY K1 IS SHOWN IN THE ENERGIZED (PREEMPT NOT ACTIVE) NORMAL OPERATION STATE.
- RELAY K1 IS A DPDT WITH 120VAC COIL, POTTER & BRUMFIELD KRPIIAG WITH OCTAL BASE OR APPROVED EQUIVALENT.
- RELAY SSR1 IS A SPST (NORMALLY OPEN) SOLID STATE RELAY WITH AC INPUT AND AC (25 AMP) OUTPUT. CRYDOM TA1225 OR APPROVED EQUIVALENT.
- AC ISOLATOR CARD SHALL ACTIVATE PREEMPTION UPON REMOVAL OF AC+ FROM THE INPUT (AS SHOWN ABOVE).
- RESISTOR IS VALUED AT 2K OHM, 12 WATT. CLAROSTAT PART NO. VPR10F-2K OR APPROVED EQUIVALENT.
- RC NETWORK IS VALUED AT .1 MICROFARAD, 100 OHM.
- IF REPLACEMENT MOV'S ARE NEEDED, GE PART NO. V150LA20A MAY BE USED.
- PREEMPTION AND BLANKOUT SIGN CONTROL BOX IS A CONTROL TECHNOLOGIES PART NO. 2299-101 OR APPROVED EQUIVALENT.
- IMPORTANT!! A JUMPER MUST BE ADDED BETWEEN INPUT FILE TERMINALS J14-E AND J14-K IF NOT ALREADY PRESENT. ALSO, TERMINAL TB9-12 (ON INPUT PANEL) SHALL BE CONNECTED TO AC NEUTRAL (JUMPER MAY HAVE TO BE ADDED).

FRONT VIEW

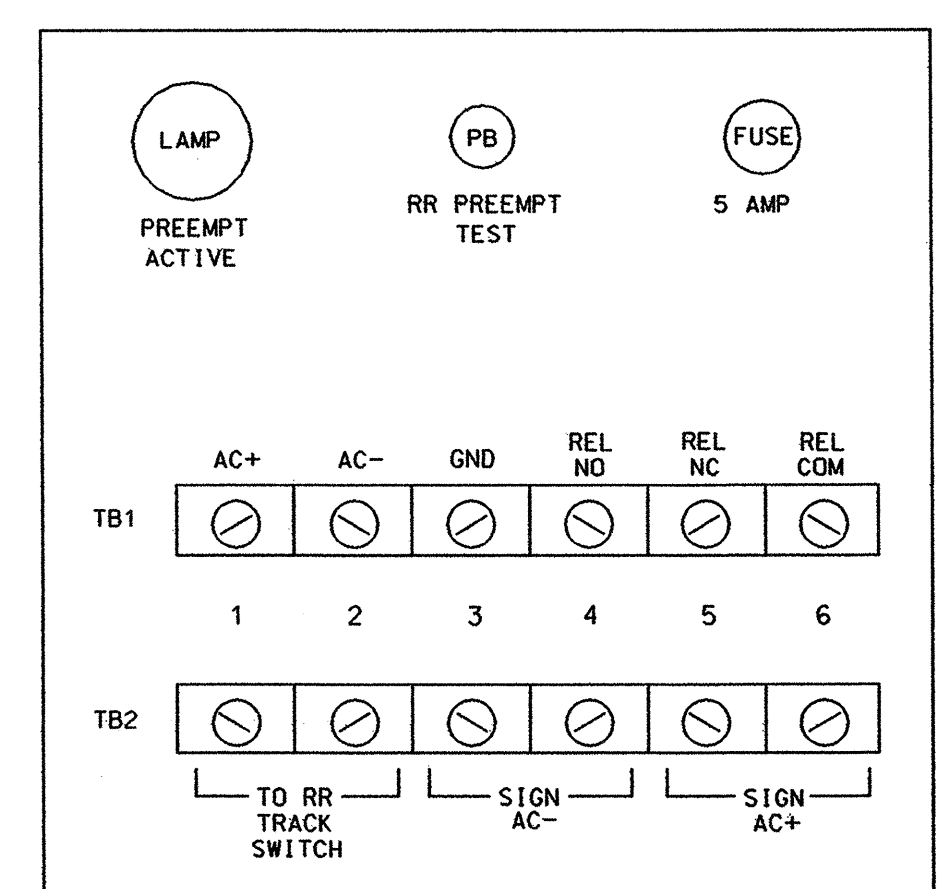

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 12-0923
DESIGNED: DECEMBER 2004
SEALED: 1/31/05
REVISED:

SIGNAL UPGRADE - SHEET 2 OF 2

	<p>NC 7 (LONG AVENUE) AT BROAD STREET</p>		
	<p>PREPARED BY: WILLIAM HAIRSTON</p>	<p>REVIEWED BY: T. J. J.</p>	
<p>REVISIONS</p>			<p>SIG. INVENTORY NO. 12-0923</p>

06-FEB-2005 07:13
U:\120923_2005\sig\sig.dgn
W:\HAIRSTON