
(program controller as shown below)

- 1. FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2 AND 3.
- 2. FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).

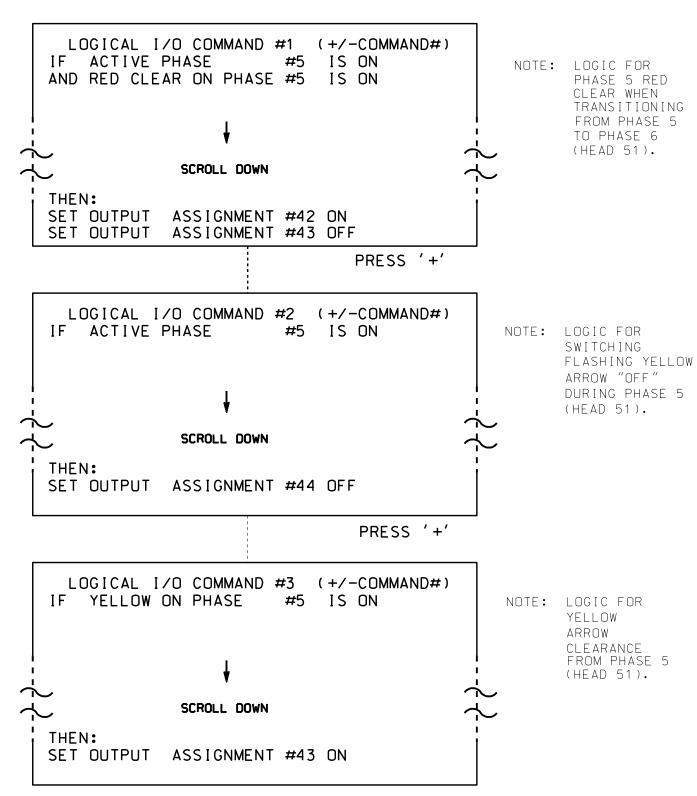

LOGIC I/O PROCESSOR PROGRAMMING COMPLETE


## **OUTPUT REFERENCE SCHEDULE**

OUTPUT 42 = Overlap C Red OUTPUT 43 = Overlap C Yellow OUTPUT 44 = Overlap C Green

## OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS). THEN '1' (VEHICLE OVERLAP SETTINGS).

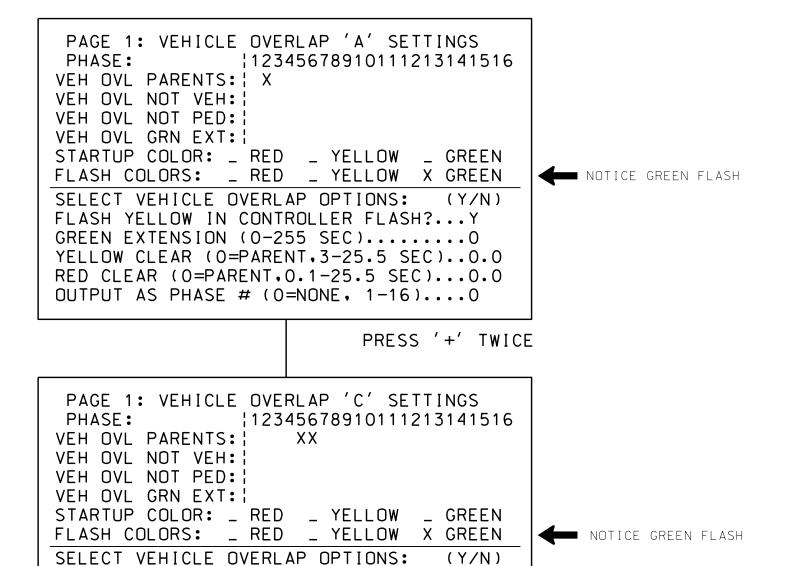


OVERLAP PROGRAMMING COMPLETE

RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0 OUTPUT AS PHASE # (0=NONE, 1-16)....0

FLASH YELLOW IN CONTROLLER FLASH?...Y GREEN EXTENSION (0-255 SEC).....0 YELLOW CLEAR (O=PARENT,3-25.5 SEC)..0.0

> THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 07-0550 DESIGNED: March 2014 SEALED: 3/5/2015 REVISED: N/A

Electrical Detail - Sheet 2 of 2



SR 1113 (E. Kivett Drive)

Hoskins St. and Oneka Ave.

REVISIONS

ivision 7 Guilford County High Point PLAN DATE: August 2014 REVIEWED BY: T. Joyce PREPARED BY: C. Strickland Reviewed BY:

INIT. DATE

SIG. INVENTORY NO. 07-0550

SEAL

PROJECT REFERENCE NO.

C-5558

|Sig. 17.2

750 N.Greenfield Pkwy.Garner,NC 27529