



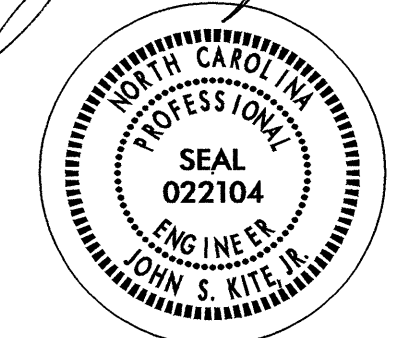



PROJ. REFERENCE NO.	SHEET NO.
R-2568B	PM-01

PAVEMENT MARKING SCHEDULE

Pavement Marking Schedule
TIP Project # R-2568B

SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS	PAY ITEM QUANTITY BREAKDOWN		TOTAL QUANTITY	
			QUANTITY	UNIT	QUANTITY	UNIT
TA	WHITE EDGELINE	THERMOPLASTIC (100MM, 2.3MM)	24068	M	TOTAL	24068 M
TC	3 M. WHITE SKIP	THERMOPLASTIC (100MM, 3.1MM)	3914	M		
TD	0.5 M. WHITE MINISKIP		200	M		
TE	WHITE SOLID LANE LINE		2155	M		
TF	3 M. YELLOW SKIP		109	M		
TH	YELLOW SINGLE CENTER		436	M		
TI	YELLOW DOUBLE CENTER		2922	M	TOTAL	9736 M
TP	WHITE GORELINE	THERMOPLASTIC (200MM, 2.3MM)	1177	M		
TQ	WHITE DIAGONAL		150	M	TOTAL	1327 M
T2	WHITE STOPBAR	THERMOPLASTIC (600MM, 3.1MM)	134	M	TOTAL	134 M
UI	ALPHANUMERIC CHAR.	THERMOPLASTIC PAVEMENT MARKING CHARACTER (3.1MM)	18	EA	TOTAL	18 EA
UA	LEFT TURN ARROW	THERMOPLASTIC PAVEMENT MARKING SYMBOLS (2.3MM)	43	EA		
UB	RIGHT TURN ARROW		20	EA		
UC	STRAIGHT ARROW		46	EA		
UE	COMBO. STRAIGHT/RIGHT		7	EA	TOTAL	116 EA
ME	YELLOW & YELLOW	MARKERS SNOWPLOWABLE RAISED PAVEMENT MARKERS	40	EA		
MF	CRYSTAL & RED		1246	EA	TOTAL	1286 EA

01-SEP-2004 12:41
 M:\TIP\PM\SHEETS\R2568B_PM01.dgn
 SJS\kes AT TETC196513

APPROVED: <i>John S. Kite</i> DATE: 9/1/04 	<h2 style="margin: 0;">PAVEMENT MARKING SCHEDULE</h2>	<table border="1" style="font-size: small;"> <tr> <td>SCALE:</td> <td>NONE</td> <td rowspan="4" style="text-align: center;">  </td> <td>REVISIONS</td> </tr> <tr> <td>DATE:</td> <td>JAN04</td> <td></td> </tr> <tr> <td>DWG. BY:</td> <td>SJS</td> <td></td> </tr> <tr> <td>DESIGN BY:</td> <td>SJS</td> <td></td> </tr> <tr> <td>REVIEWED BY:</td> <td>CLM</td> <td></td> <td></td> </tr> </table>	SCALE:	NONE		REVISIONS	DATE:	JAN04		DWG. BY:	SJS		DESIGN BY:	SJS		REVIEWED BY:	CLM		
SCALE:	NONE		REVISIONS																
DATE:	JAN04																		
DWG. BY:	SJS																		
DESIGN BY:	SJS																		
REVIEWED BY:	CLM																		