


**LOGICAL I/O PROCESSOR PROGRAMMING DETAIL
TO PRODUCE SPECIAL FYA SIGNAL SEQUENCE**

(program controller as shown below)

- From Main Menu press '2' (PHASE CONTROL), then '1' (PHASE CONTROL FUNCTIONS). Scroll to the bottom of the menu and Enable ACT Logic Commands 1, 2 and 3.
- From Main Menu press '6' (OUTPUTS), then '3' (LOGICAL I/O PROCESSOR).

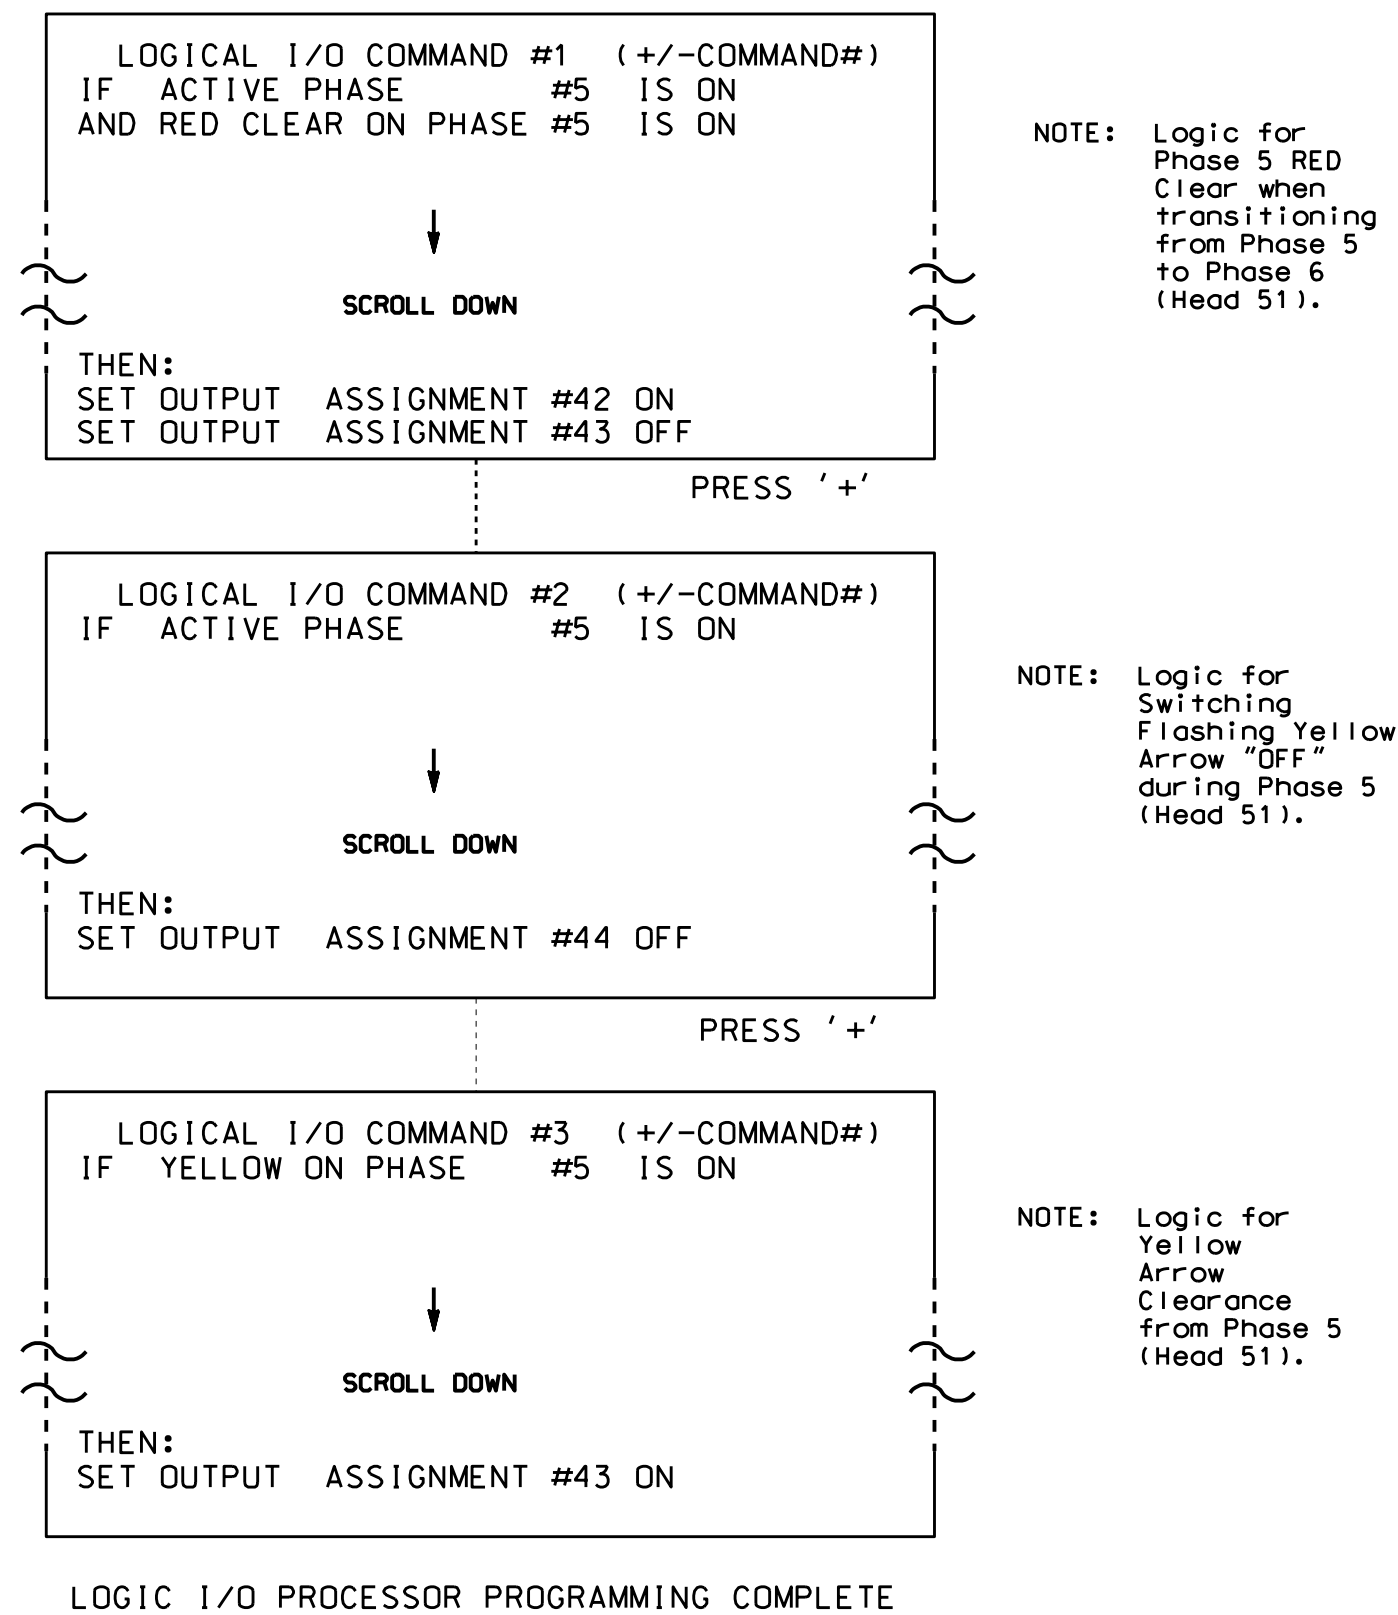

OUTPUT REFERENCE SCHEDULE	
OUTPUT 42 =	Overlap C Red
OUTPUT 43 =	Overlap C Yellow
OUTPUT 44 =	Overlap C Green

OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

- From Main Menu press '8' (OVERLAPS), then '1' (VEHICLE OVERLAP SETTINGS).
PRESS '+' TWICE

```

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
PHASE:          12345678910111213141516
VEH OVL PARENTS:  XX
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR:  _ RED _ YELLOW _ GREEN
FLASH COLORS:  _ RED _ YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT.3-25.5 SEC)...0.0
RED CLEAR (0=PARENT.0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0
  
```

← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 07-1001
DESIGNED: September 2014
SEALED: 4/21/15
REVISED: N/A

Electrical Detail - Sheet 2 of 2

	ELECTRICAL AND PROGRAMMING DETAILS FOR: SR 1486 (E. Lexington Ave.) at N. Hamilton Street	SEAL NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 022013 GEORGE C. BROWN
	Division 7 Guilford County High Point PLAN DATE: December 2014 REVIEWED BY: T. Joyce PREPARED BY: B. SIMMONS REVIEWED BY:	REVISIONS INIT. DATE
SIG. INVENTORY NO. 07-1001		