








NOTE:  
UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

NOTE:  
TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS

PROJECT REFERENCE NO.	SHEET NO.
B-4058	EC-4/CONST.4
R/W SHEET NO.	HYDRAULICS ENGINEER
ROADWAY DESIGN ENGINEER	

-L-	
PI Sta. 12+39.09	PI Sta. 19+41.14
$\Delta = 1^{\circ} 59' 30.7''$ (LT)	$\Delta = 3^{\circ} 29' 03.1''$ (LT)
$D = 3^{\circ} 49' 11.0''$	$D = 0^{\circ} 50' 00.2''$
$L = 313.95'$	$L = 418.07'$
$T = 157.55'$	$T = 209.10'$
$R = 1,500.00'$	$R = 6,875.00'$
$SE = .06$	$SE = .02$

DESIGN EXCEPTION REQUIRED FOR SAG VERTICAL CURVES, MAXIMUM GRADE, AND STOPPING SIGHT DISTANCES.

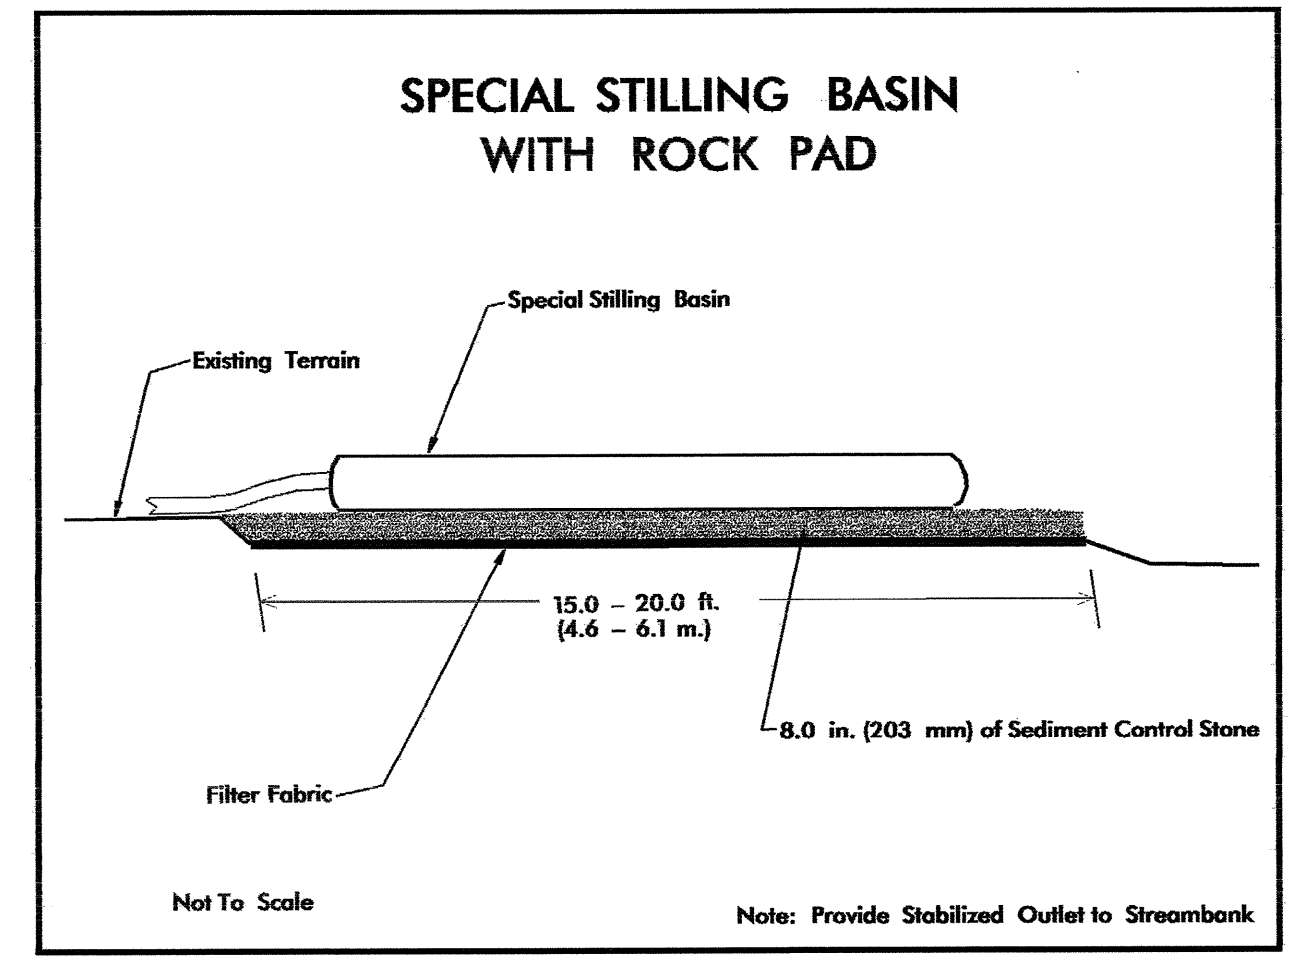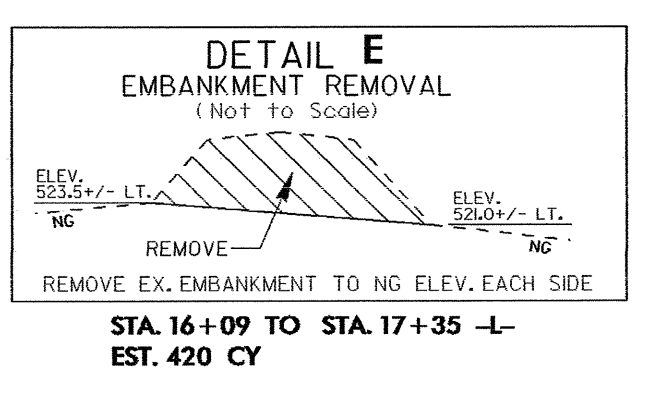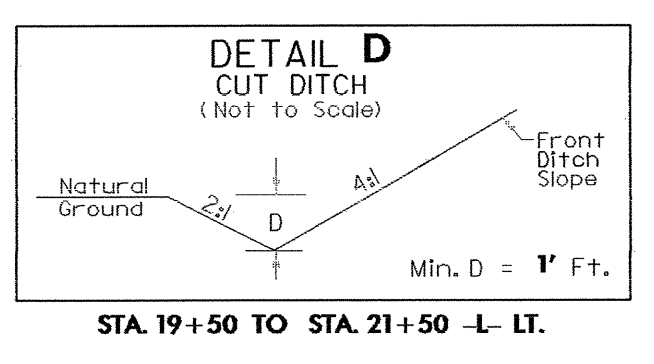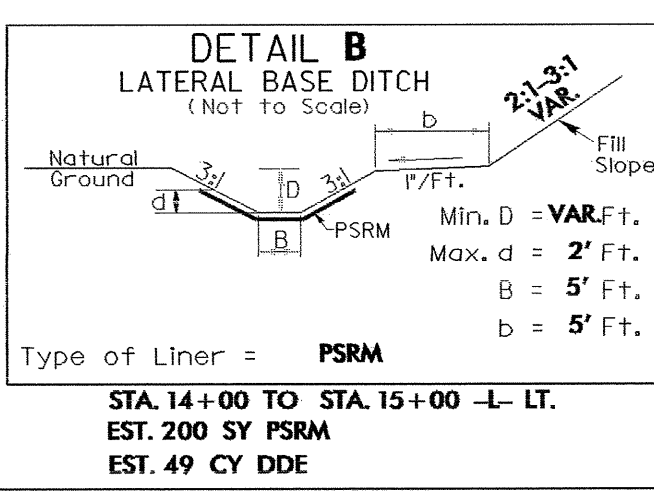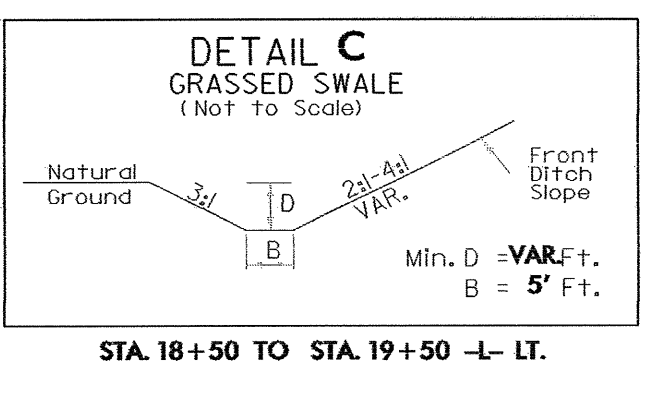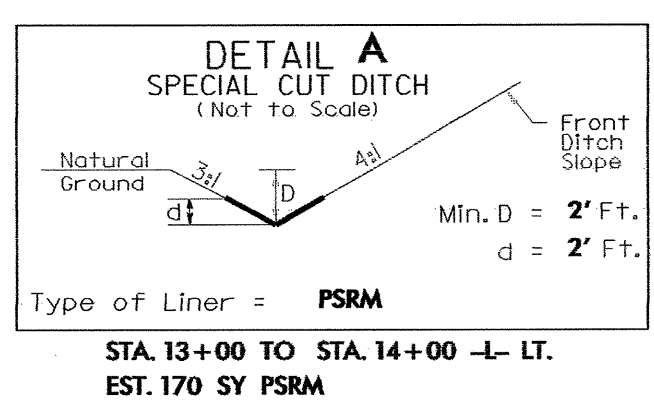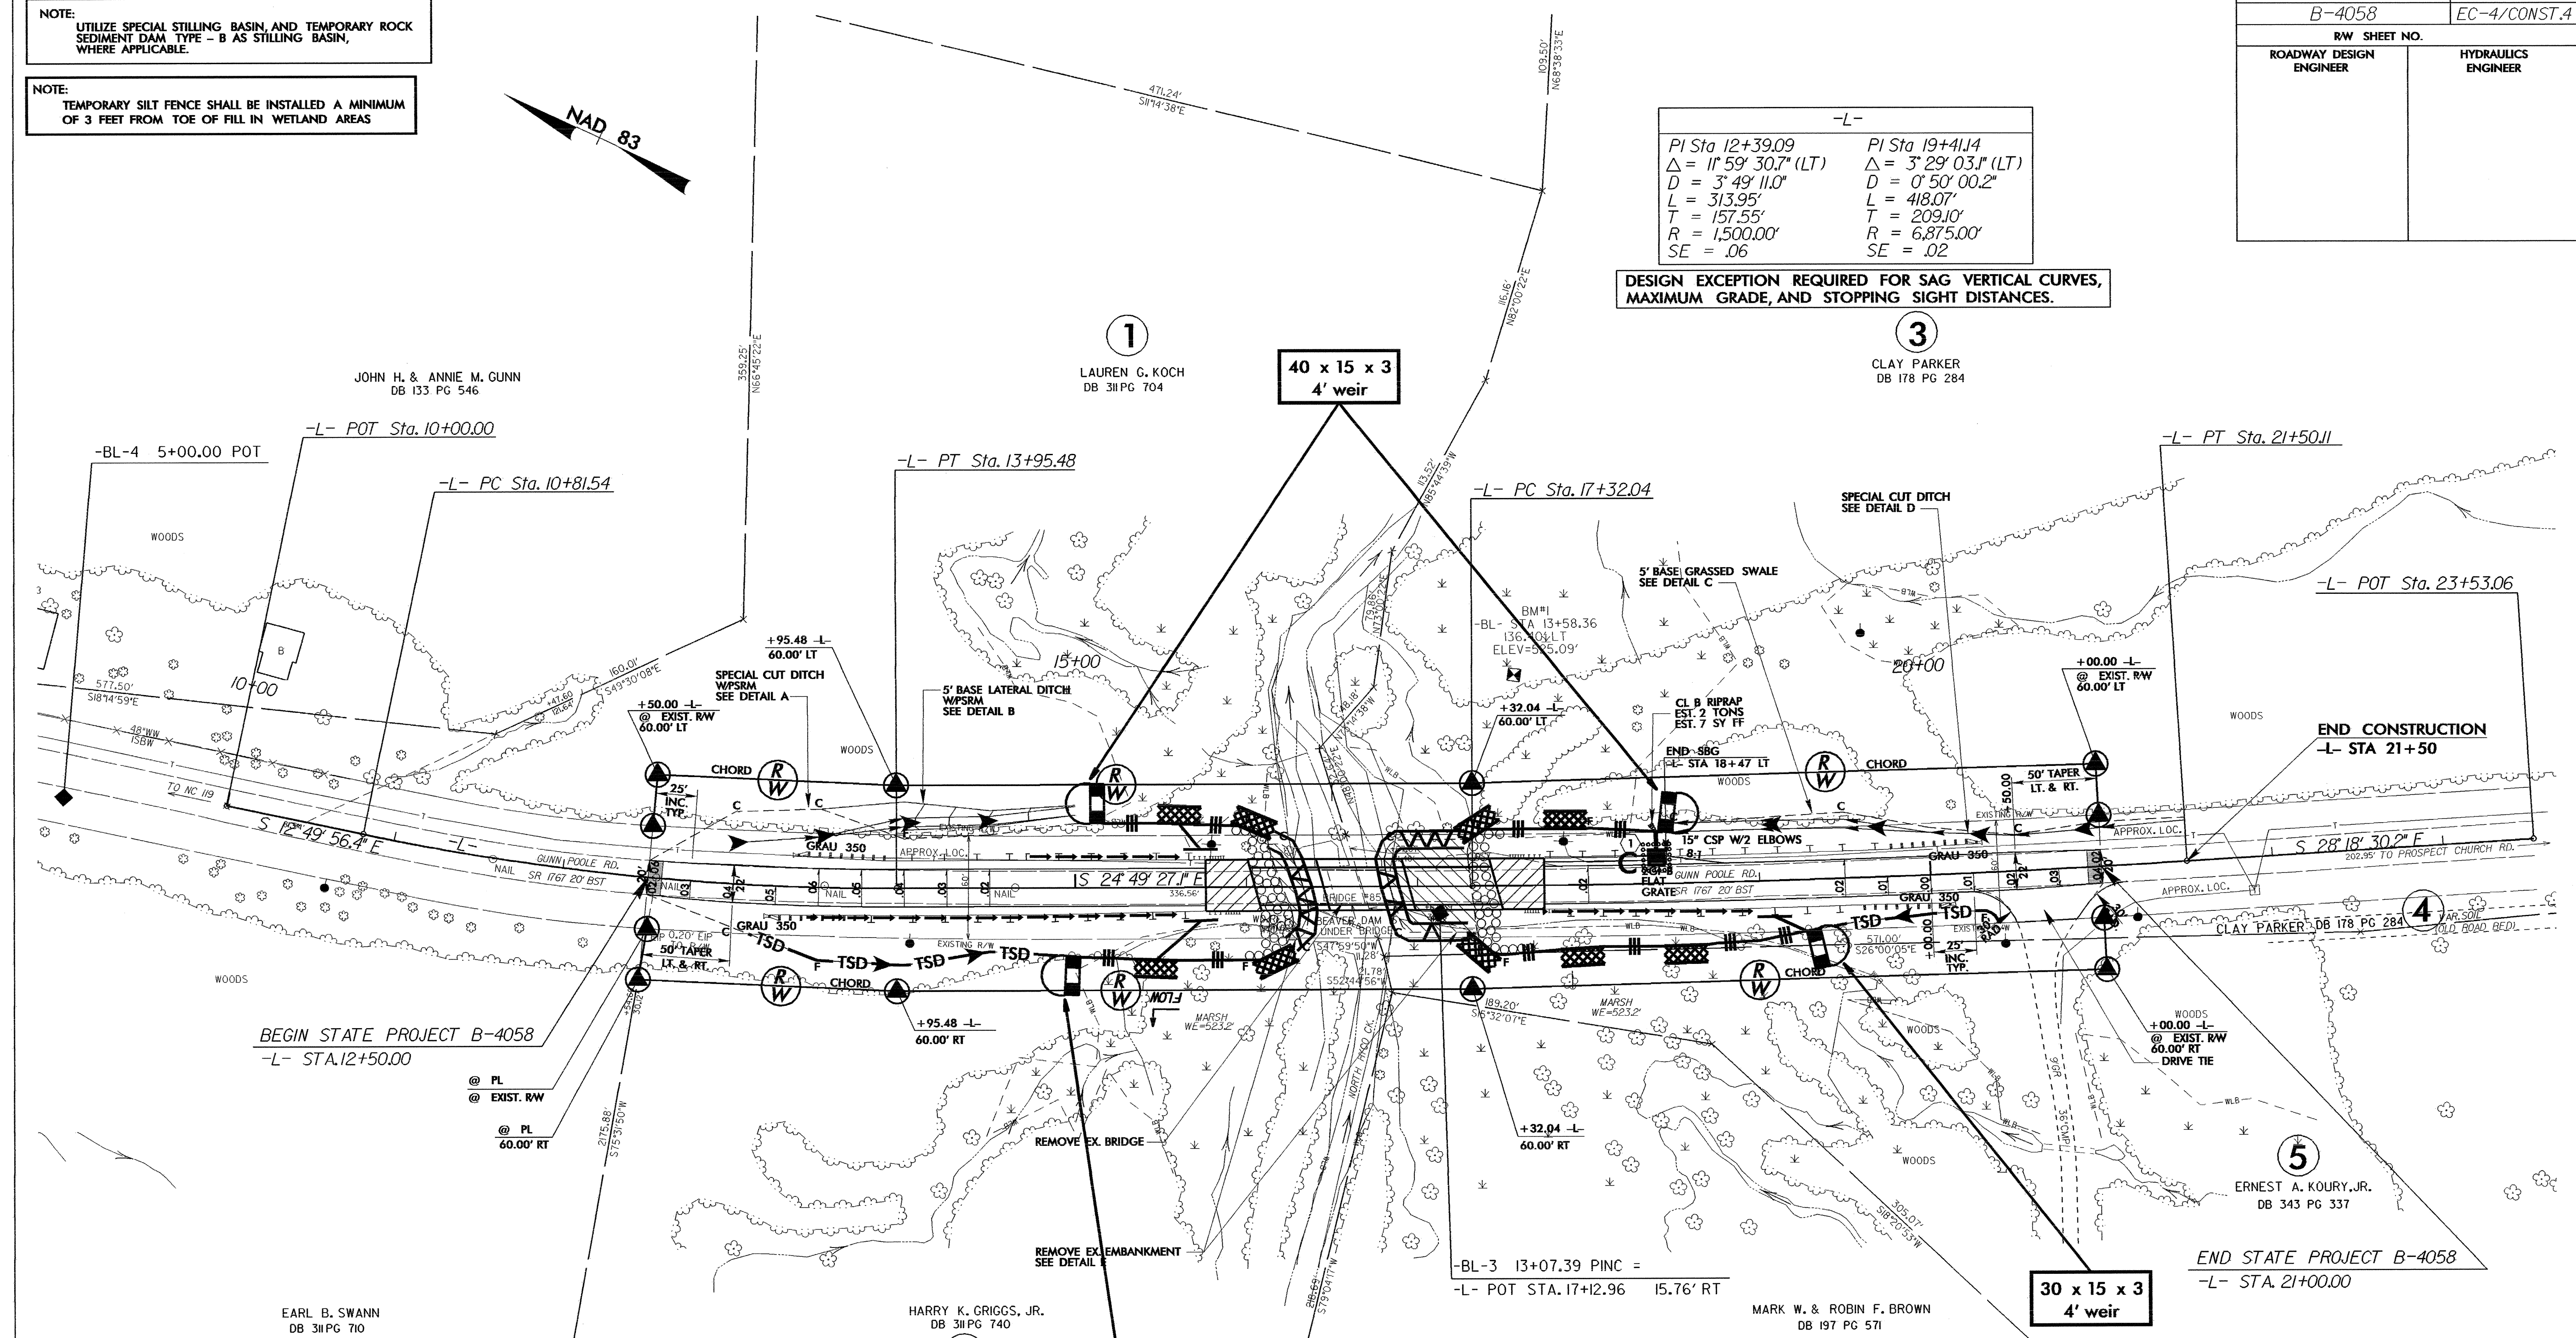

SEE SHEET 5 FOR -L- PROFILE  
SEE SHEETS S-1 THRU S-2 FOR STRUCTURE PLANS