

## LOGICAL I/O PROCESSOR PROGRAMMING DETAIL TO PRODUCE SPECIAL FYA-PPLT SIGNAL SEQUENCE

(program controller as shown below)

1. FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2, 3, 4, 5 AND 6.
2. FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).

LOGICAL I/O COMMAND #1 (+/-COMMAND#)  
IF ACTIVE PHASE #1 IS ON  
AND RED CLEAR ON PHASE #1 IS ON

↓  
SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #50 ON  
SET OUTPUT ASSIGNMENT #51 OFF

PRESS '+'

NOTE: LOGIC FOR PHASE 1 RED CLEAR WHEN TRANSITIONING FROM PHASE 1 TO PHASE 2 (HEAD 11).

LOGICAL I/O COMMAND #2 (+/-COMMAND#)  
IF ACTIVE PHASE #1 IS ON

↓  
SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #52 OFF

PRESS '+'

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 1 (HEAD 11).

LOGICAL I/O COMMAND #3 (+/-COMMAND#)  
IF YELLOW ON PHASE #1 IS ON

↓  
SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #51 ON

PRESS '+'

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 1 (HEAD 11).

LOGICAL I/O COMMAND #4 (+/-COMMAND#)  
IF ACTIVE PHASE #5 IS ON  
AND RED CLEAR ON PHASE #5 IS ON

↓  
SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #42 ON  
SET OUTPUT ASSIGNMENT #43 OFF

PRESS '+'

NOTE: LOGIC FOR PHASE 5 RED CLEAR WHEN TRANSITIONING FROM PHASE 5 TO PHASE 6 (HEAD 51).

LOGICAL I/O COMMAND #5 (+/-COMMAND#)  
IF ACTIVE PHASE #5 IS ON

↓  
SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #44 OFF

PRESS '+'

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 5 (HEAD 51).

LOGICAL I/O COMMAND #6 (+/-COMMAND#)  
IF YELLOW ON PHASE #5 IS ON

↓  
SCROLL DOWN

THEN:  
SET OUTPUT ASSIGNMENT #43 ON

PRESS '+'

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 5 (HEAD 51).

LOGIC I/O PROCESSOR PROGRAMMING COMPLETE

<b>OUTPUT REFERENCE SCHEDULE</b>	
OUTPUT 42 =	Overlap C Red
OUTPUT 43 =	Overlap C Yellow
OUTPUT 44 =	Overlap C Green
OUTPUT 50 =	Overlap A Red
OUTPUT 51 =	Overlap A Yellow
OUTPUT 52 =	Overlap A Green

## OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

- FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS  
 PHASE: 12345678910111213141516  
 VEH OVL PARENTS: XX  
 VEH OVL NOT VEH:  
 VEH OVL NOT PED:  
 VEH OVL GRN EXT:  
 STARTUP COLOR: \_ RED \_ YELLOW \_ GREEN  
 FLASH COLORS: \_ RED \_ YELLOW X GREEN  
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)  
 FLASH YELLOW IN CONTROLLER FLASH?...Y  
 GREEN EXTENSION (0-255 SEC)...0.0  
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0  
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0  
 OUTPUT AS PHASE # (0=NONE, 1-16)...0

← NOTICE GREEN FLASH

PRESS '+' TWICE

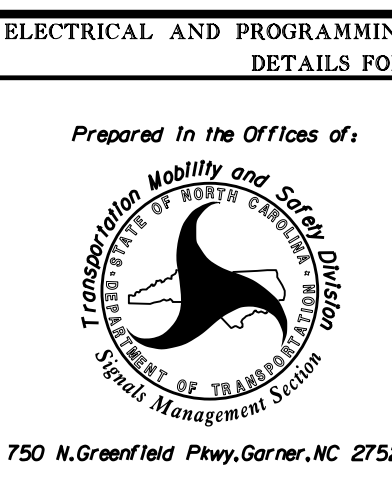
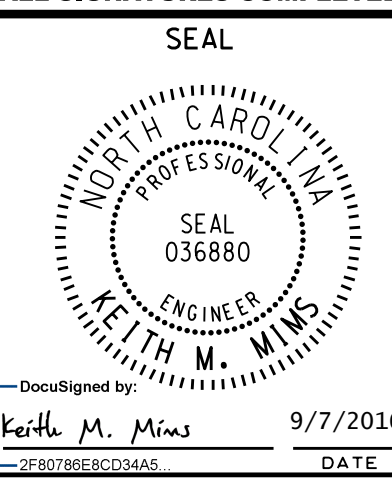
PAGE 1: VEHICLE OVERLAP 'C' SETTINGS  
 PHASE: 12345678910111213141516  
 VEH OVL PARENTS: XX  
 VEH OVL NOT VEH:  
 VEH OVL NOT PED:  
 VEH OVL GRN EXT:  
 STARTUP COLOR: \_ RED \_ YELLOW \_ GREEN  
 FLASH COLORS: \_ RED \_ YELLOW X GREEN  
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)  
 FLASH YELLOW IN CONTROLLER FLASH?...Y  
 GREEN EXTENSION (0-255 SEC)...0.0  
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0  
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0  
 OUTPUT AS PHASE # (0=NONE, 1-16)...0

← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 13-1215  
 DESIGNED: May 2016  
 SEALED: 8/10/2016  
 REVISED: N/A

Electrical Detail - Sheet 2 of 2

	<p><b>Electrical AND PROGRAMMING DETAILS FOR:</b></p> <p><b>NC 112 (Sand Hill Road) at SR 3437 (Lake Drive)/ Colbond Driveway</b></p>	<p>SEAL</p> 								
<p>Division 13 Buncombe County Enka</p> <p>PLAN DATE: July 2016 REVIEWED BY: BAS</p> <p>PREPARED BY: S. Armstrong REVIEWED BY:</p>										
<p>REVISIONS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NO.</th> <th>DESCRIPTION</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>			NO.	DESCRIPTION	INIT.	DATE				
NO.	DESCRIPTION	INIT.	DATE							
<p>DocuSigned by: <b>Keith M. Mins</b> 9/7/2016</p> <p>SIG. INVENTORY NO. 13-1215</p>										

11-10-2016 07:19 S:\ITS\AS\13-1215\Sig\_Mgmt\mstrong\131215\_sml.elec.xxx.dgn somstrong