


TYPICAL SECTION NO.1


-L- STA.13+55.00 TO 14+72.00 (BEGIN BRIDGE)
-L- STA.17+50.00 TO 18+20.00

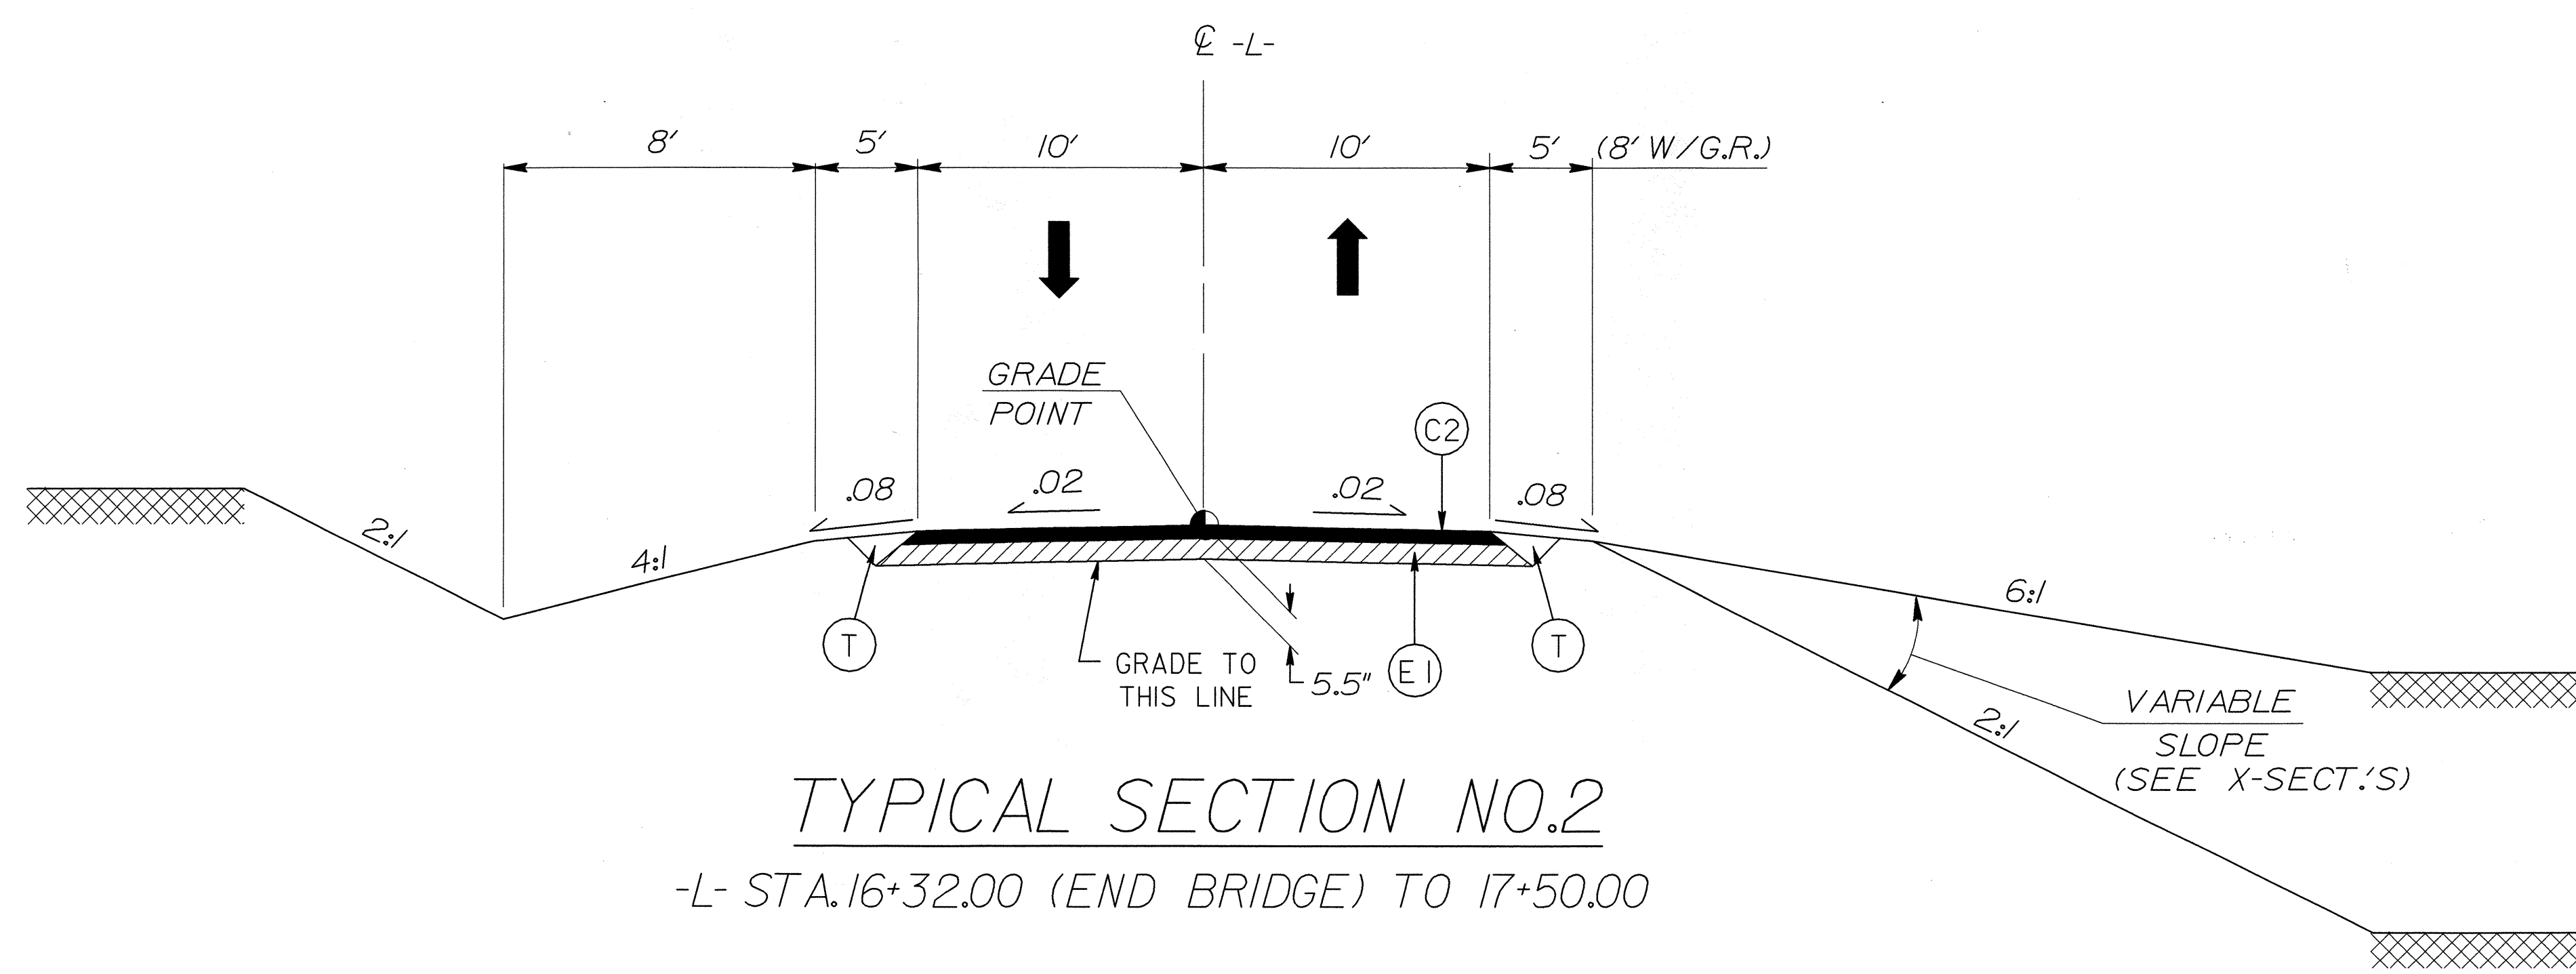

TYPICAL SECTION NO.2

-L- STA.16+32.00 (END BRIDGE) TO 17+50.00

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.25" ASPH. CONC. SURFACE COURSE, TYPE S9.5A, AT AN AVERAGE RATE OF 140 LB. PER SQ. YD.
C2	PROP. APPROX. 2.5" ASPH. CONC. SURFACE COURSE, TYPE S9.5A, AT AN AVERAGE RATE OF 140 LB. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPH. CONC. SURFACE COURSE, TYPE S9.5A, AT AN AVERAGE RATE OF 112 LB. PER SQ. YD. PER 1.0" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1.25" OR GREATER THAN 1.5" DEPTH.
E1	PROP. APPROX. 3.0" ASPH. CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 342 LB. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPH. CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LB. PER SQ. YD. PER 1.0" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3.0" OR GREATER THAN 5.5" DEPTH.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
W	VARIABLE DEPTH BITUMINOUS PAVEMENT. (SEE WEDGING DETAIL THIS SHEET)

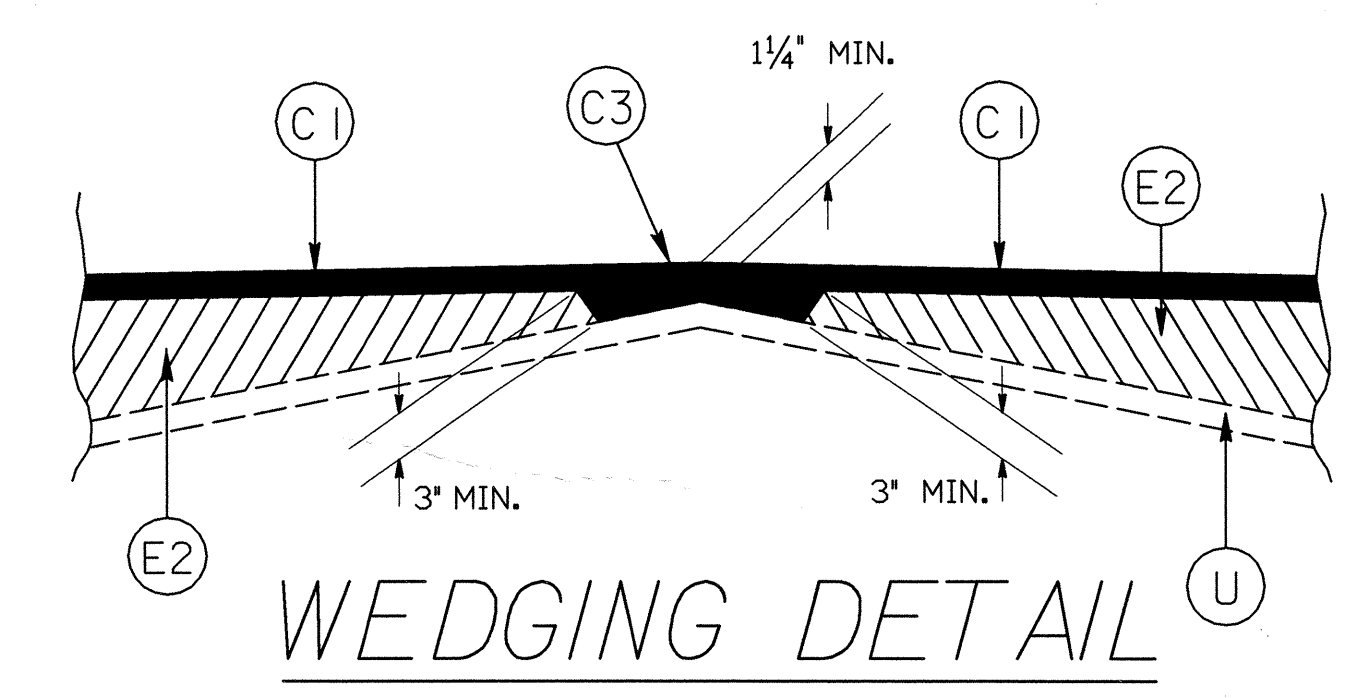

ALL SLOPES ARE 1:1 UNLES NOTED OTHERWISE