

OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS "1" CONTROLLER
AND THEN "5" OVERLAPS

Overlaps
1.General Parm
2.Program
3.Status

Enter Overlap # 1
then press Enter

Overlap A-1
1.Program Parm
2.Confl Prog+
3.Program Parm+

OvrIp A-1 Ps.....
Included Ps 6 8 0 0 0 0 0 0
Modifier Ps 0 0 0 0 0 0 0 0
Type:NORMAL Grn: 4 Yel: 4.3 Red: 1.0

Note Grn,
Yel, Red
values for
Timed
Overlap A

PRESS "ESC"

Overlap A-1
1.Program Parm
2.Confl Prog+
3.Program Parm+

OvrIp A-1 Ps.....
Confl Ps 0 0 0 0 0 0 0 0
Confl OvrIps 0 0 0 0 0 0 0 0
Confl Peds 0 0 0 0 0 0 0 0

PRESS "ESC"

Overlap A-1
1.Program Parm
2.Confl Prog+
3.Program Parm+

OvrIp A-1
Leading Green OFF FYA MCE Disable OFF
Transit Input 0 FYA Skip Red OFF
FYA Delay Time 0 FYA AfterPreempt OFF
PedCallClear OFF FYA Ext Overlap 0
PedClearTime 0 FYA ImmedReturn OFF
GreenExtInh 0 0 0 0 0 0 0 0

PRESS "ESC" TWICE

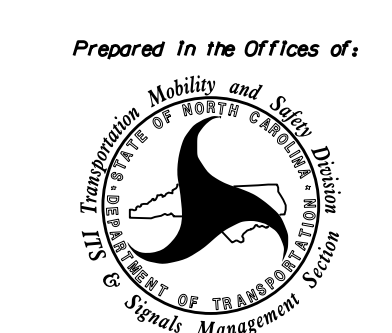
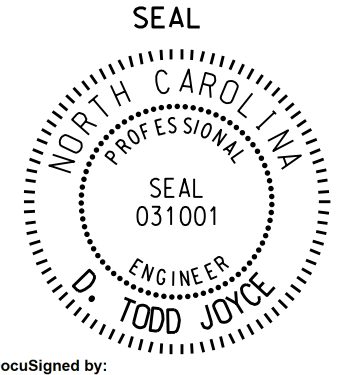
Overlaps
1.General Parm
2.Program
3.Status

General Overlap Parameters
Lock Inhibit OFF
Confl Lock Enable OFF
Parent P Cirncs OFF
Extra Included Phases OFF
InhibitLockInterval ALWAYS

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 07-0535
DESIGNED: August 2017
SEALED: 10/24/2017
REVISED:

Electrical Detail - Sheet 2 of 2

 Prepared In the Offices of: 750 N. Greenfield Pkwy, Garner, NC 27529	Lawndale Drive at I-840 Ramps		
	Division 7 PLAN DATE: October 2017 PREPARED BY: C. Strickland	Guilford County REVIEWED BY: T. Joyce REVIEWED BY:	
REVISIONS			INIT. DATE
SIG. INVENTORY NO. 07-0535			DATE

C:\Users\jjoyce\Documents\Signal\work\hgr\hgr\sig\Main\Strickland\070535_sm.ele_xxx.dgn
 C:\Users\jjoyce\Documents\Signal\work\hgr\hgr\sig\Main\Strickland\070535_sm.ele_xxx.dgn
 C:\Users\jjoyce\Documents\Signal\work\hgr\hgr\sig\Main\Strickland\070535_sm.ele_xxx.dgn