


PHASING DIAGRAM

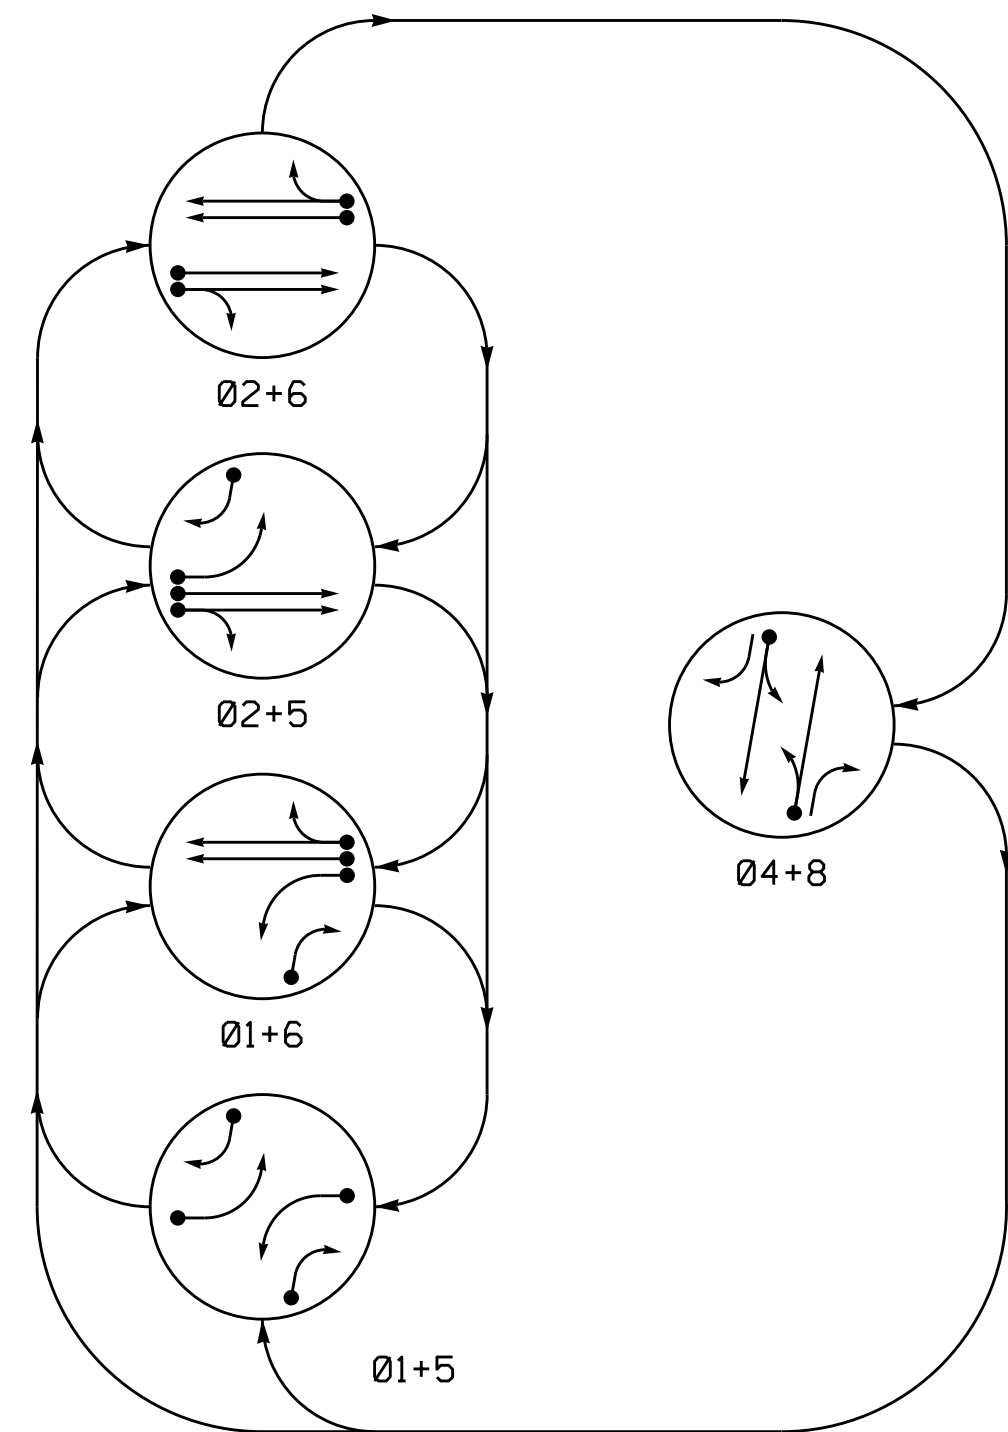

PHASING DIAGRAM DETECTION LEGEND


- ←●→ DETECTED MOVEMENT
- ←○→ UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- ←- - -> PEDESTRIAN MOVEMENT

TABLE OF OPERATION

SIGNAL FACE	PHASE					
	01+5	01+6	02+5	02+6	04+8	F
11	←	←	←	←	←	←
21,22	R	R	G	G	R	Y
41	R	R	R	R	G	R
42	R	R	R	R	G	R
51	←	←	←	←	←	←
61,62	R	G	R	G	R	Y
81	R	R	R	R	G	R
82	R	R	R	R	G	R

SIGNAL FACE I.D.

All Heads L.E.D.

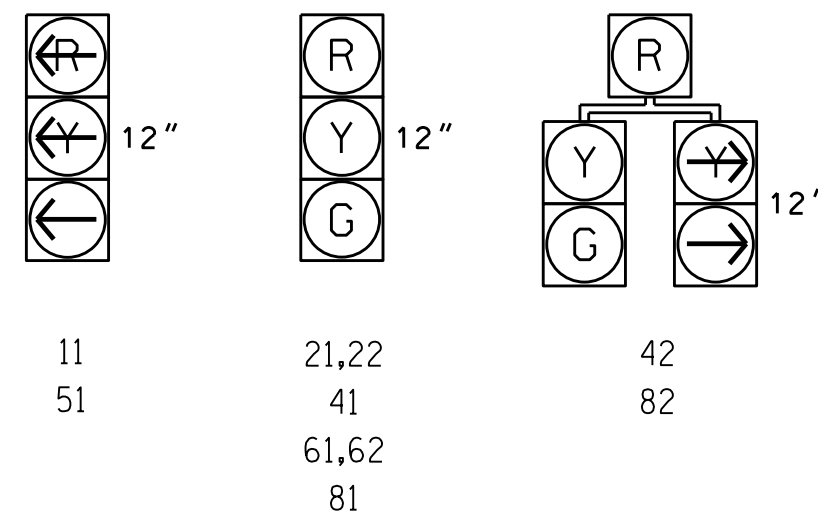

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING							
					PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME	SYSTEM LOOP	NEW CARD
1A	6X40	+5	2-4-2	-	1	Y	Y	-	-	3	-	-
1B	6X60	+5	*	*	1	Y	Y	-	-	15	-	-
2A	6X20	70	2	-	2	Y	Y	-	-	-	-	-
4A	6X40	+5	2-4-2	-	4	Y	Y	-	-	3	-	-
5A	6X40	+5	2-4-2	-	5	Y	Y	-	-	3	-	-
5B	6X40	+5	2-4-2	-	5	Y	Y	-	-	15	-	-
6A	6X20	70	2	-	6	Y	Y	-	-	-	-	-
8A	6X60	+5	*	*	8	Y	Y	-	-	3	-	-

* Multizone Microwave Detection

5 Phase Fully Actuated US 301 (Selma) CLS

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Set all detector units to presence mode.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Closed loop system data: Master Asset #, Controller Asset #0392.

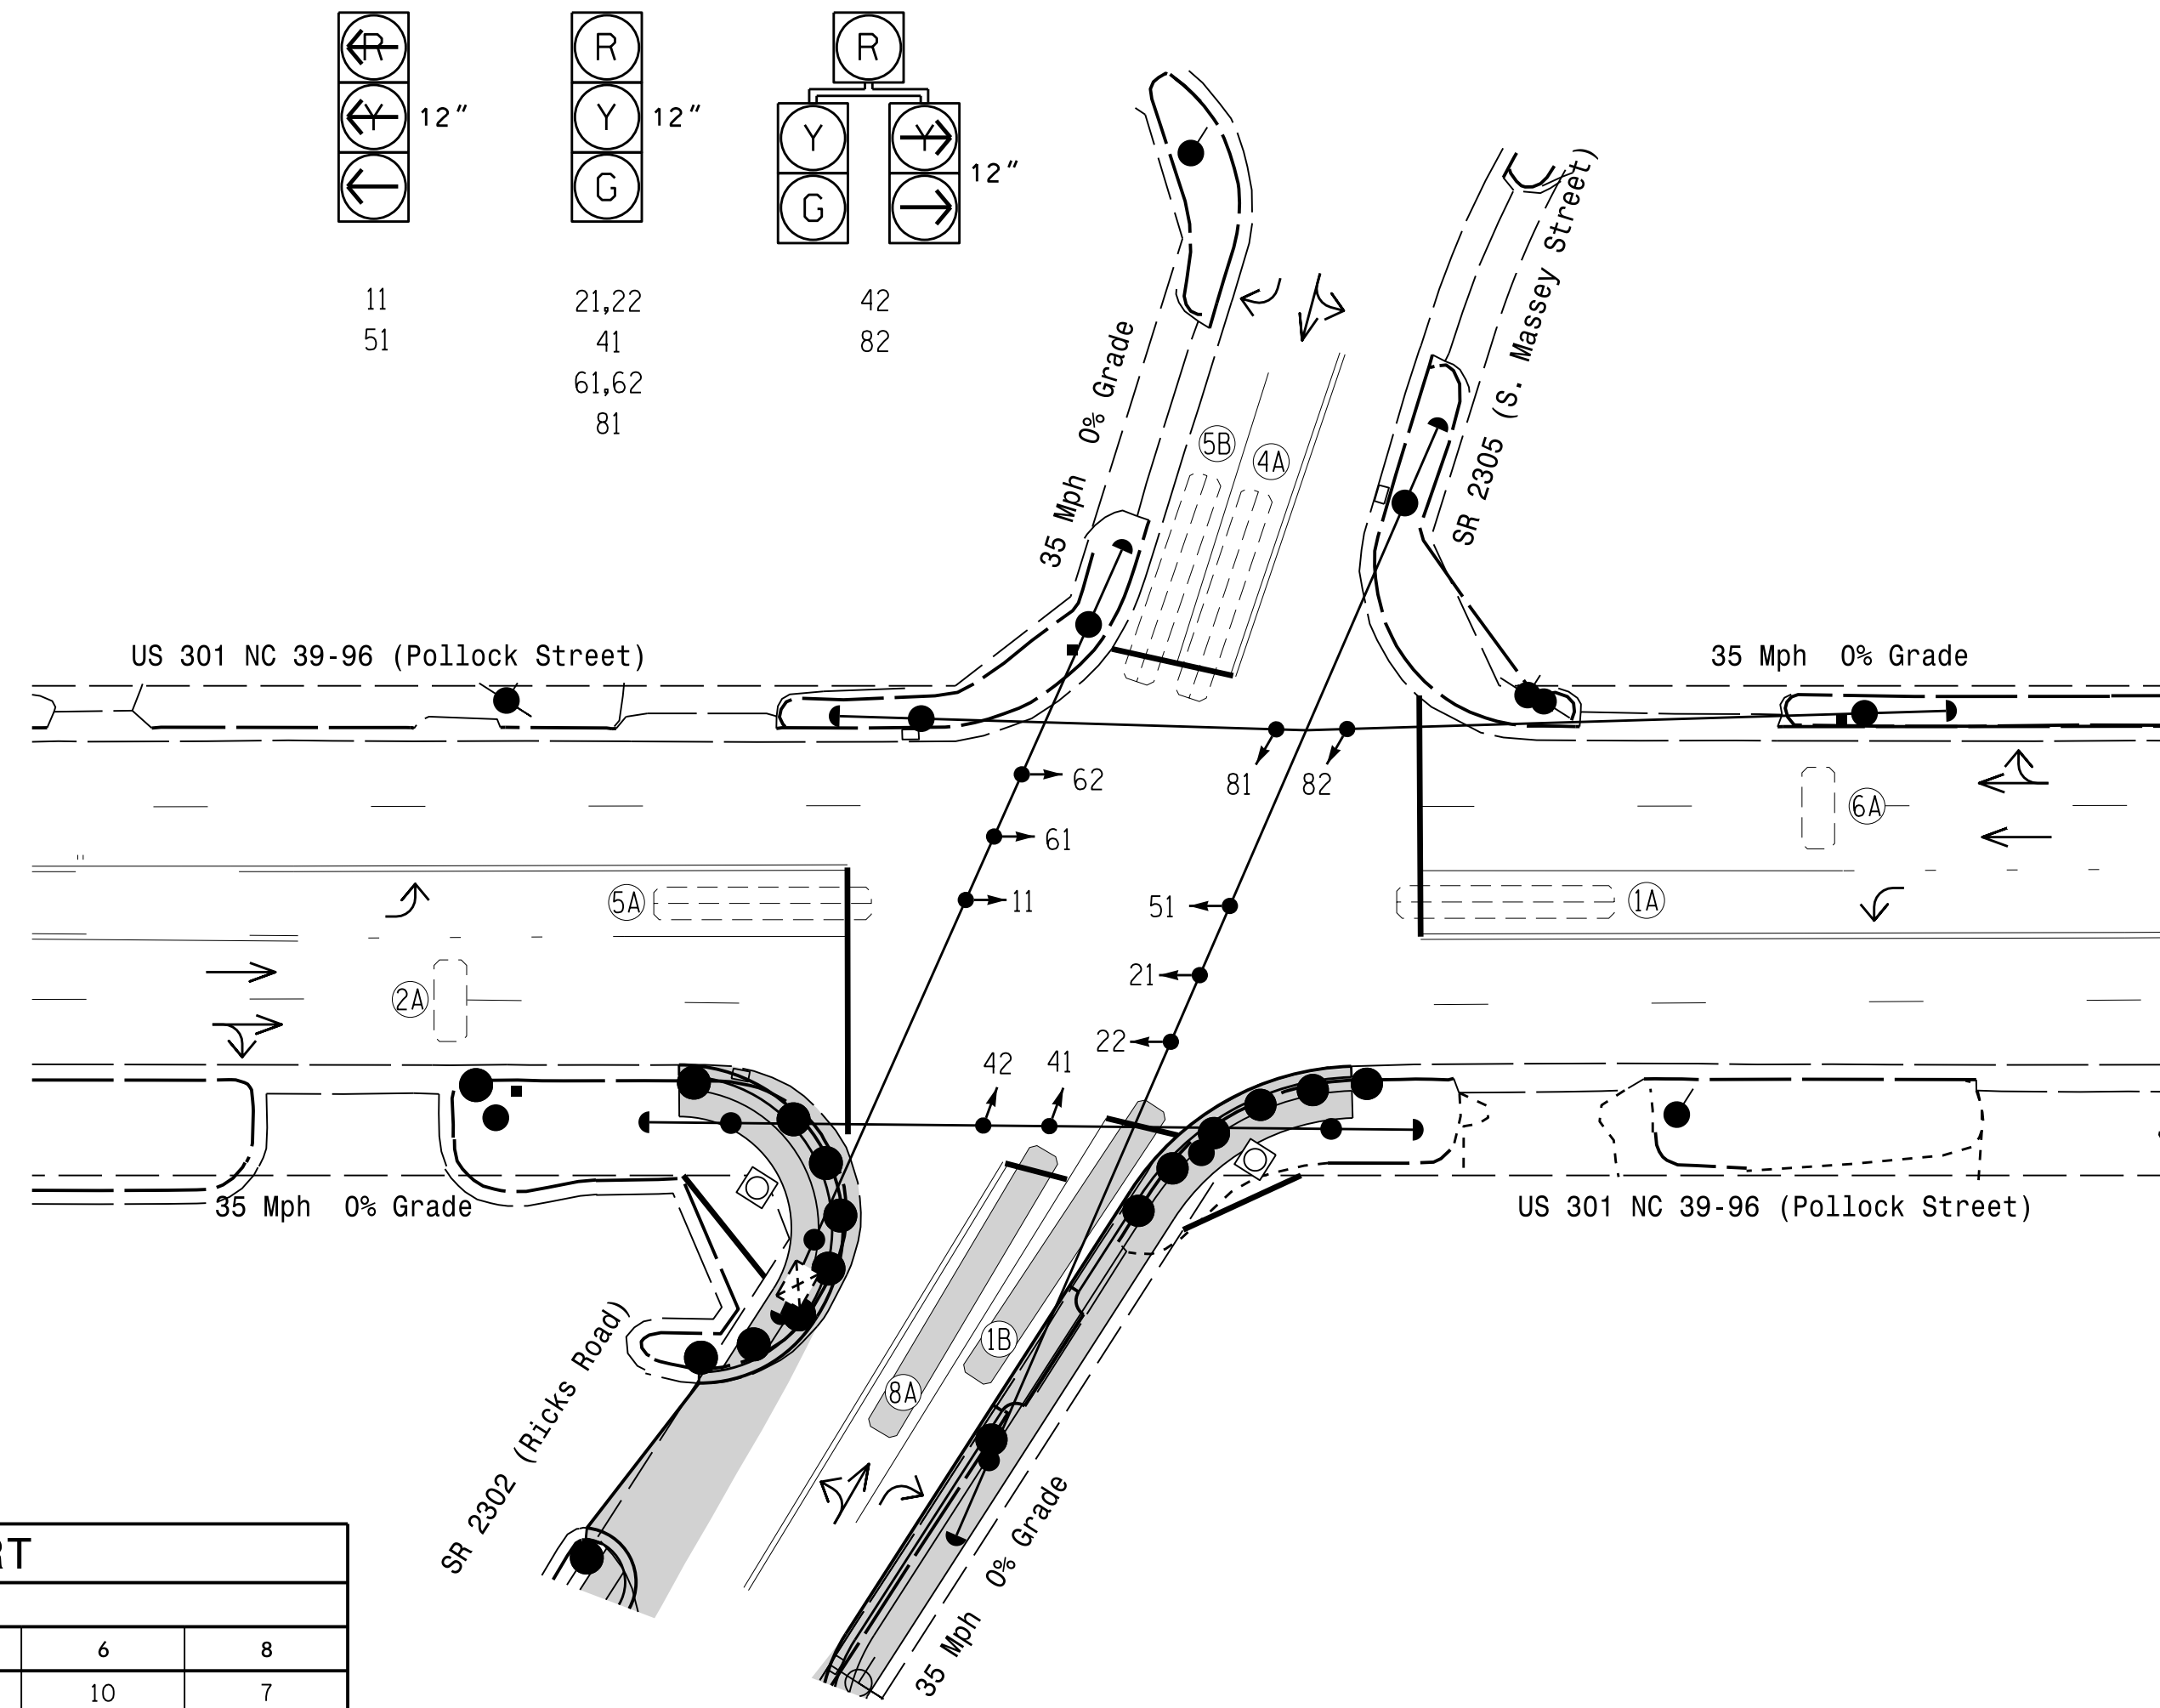

OASIS 2070 TIMING CHART

FEATURE	PHASE					
	1	2	4	5	6	8
Min Green 1 *	7	10	7	7	10	7
Extension 1 *	1.0	3.0	1.0	1.0	3.0	1.0
Max Green 1 *	15	40	20	20	40	20
Yellow Clearance	3.0	3.8	3.8	3.0	3.8	3.8
Red Clearance	2.9	1.7	2.1	2.9	1.7	2.1
Walk 1 *	-	-	-	-	-	-
Don't Walk 1	-	-	-	-	-	-
Seconds Per Actuation *	-	-	-	-	-	-
Max Variable Initial *	-	-	-	-	-	-
Time Before Reduction *	-	-	-	-	-	-
Time To Reduce *	-	-	-	-	-	-
Minimum Gap	-	-	-	-	-	-
Recall Mode	-	MIN RECALL	-	-	MIN RECALL	-
Vehicle Call Memory	-	YELLOW	-	-	YELLOW	-
Dual Entry	-	-	ON	-	-	ON
Simultaneous Gap	ON	ON	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | PROPOSED | EXISTING |
|--|--|
| ○→ Traffic Signal Head | ●→ Traffic Signal Head |
| ●→ Modified Signal Head | N/A |
| ⊥ Sign | ⊥ Sign |
| ⊥ Pedestrian Signal Head With Push Button & Sign | ⊥ Pedestrian Signal Head With Push Button & Sign |
| ○ Signal Pole with Guy | ● Signal Pole with Guy |
| ○ Signal Pole with Sidewalk Guy | ● Signal Pole with Sidewalk Guy |
| ⊠ Inductive Loop Detector | ⊠ Inductive Loop Detector |
| □ Controller & Cabinet | □ Controller & Cabinet |
| □ Junction Box | □ Junction Box |
| - - - 2-in Underground Conduit | - - - 2-in Underground Conduit |
| N/A Right of Way | - - - Right of Way |
| → Directional Arrow | → Directional Arrow |

Signal Upgrade - TCP Phases I & II

	US 301 NC 39-96 (Pollock St) at SR 2302 (Ricks Road) / SR 2305 (S. Massey Street)		
	Division 4 Johnston County Selma	SEAL 029904	
750 N. Greenfield Pkwy, Garner, NC 27529	PLAN DATE: September 2017	REVIEWED BY: JPG	DATE: 9/13/2017
PREPARED BY: JPG	REVISIONS	INIT.	DATE
		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	