

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**

**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**

09/08/19

**TIP PROJECT: R-5812**


STATE OF NORTH CAROLINA  
DIVISION OF HIGHWAYS

# GREENE COUNTY

**LOCATION: US 13 FROM NC 58 (KINGOLD BOULEVARD) TO NC 91**

**TYPE OF WORK: TRAFFIC SIGNAL DESIGN**


PROJECT REFERENCE NO.	SHEET NO.
R-5812	Sig-1.0
APPROVED: <i>William J. Hamilton</i>	
DATE: 6-11-19	
SEAL	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

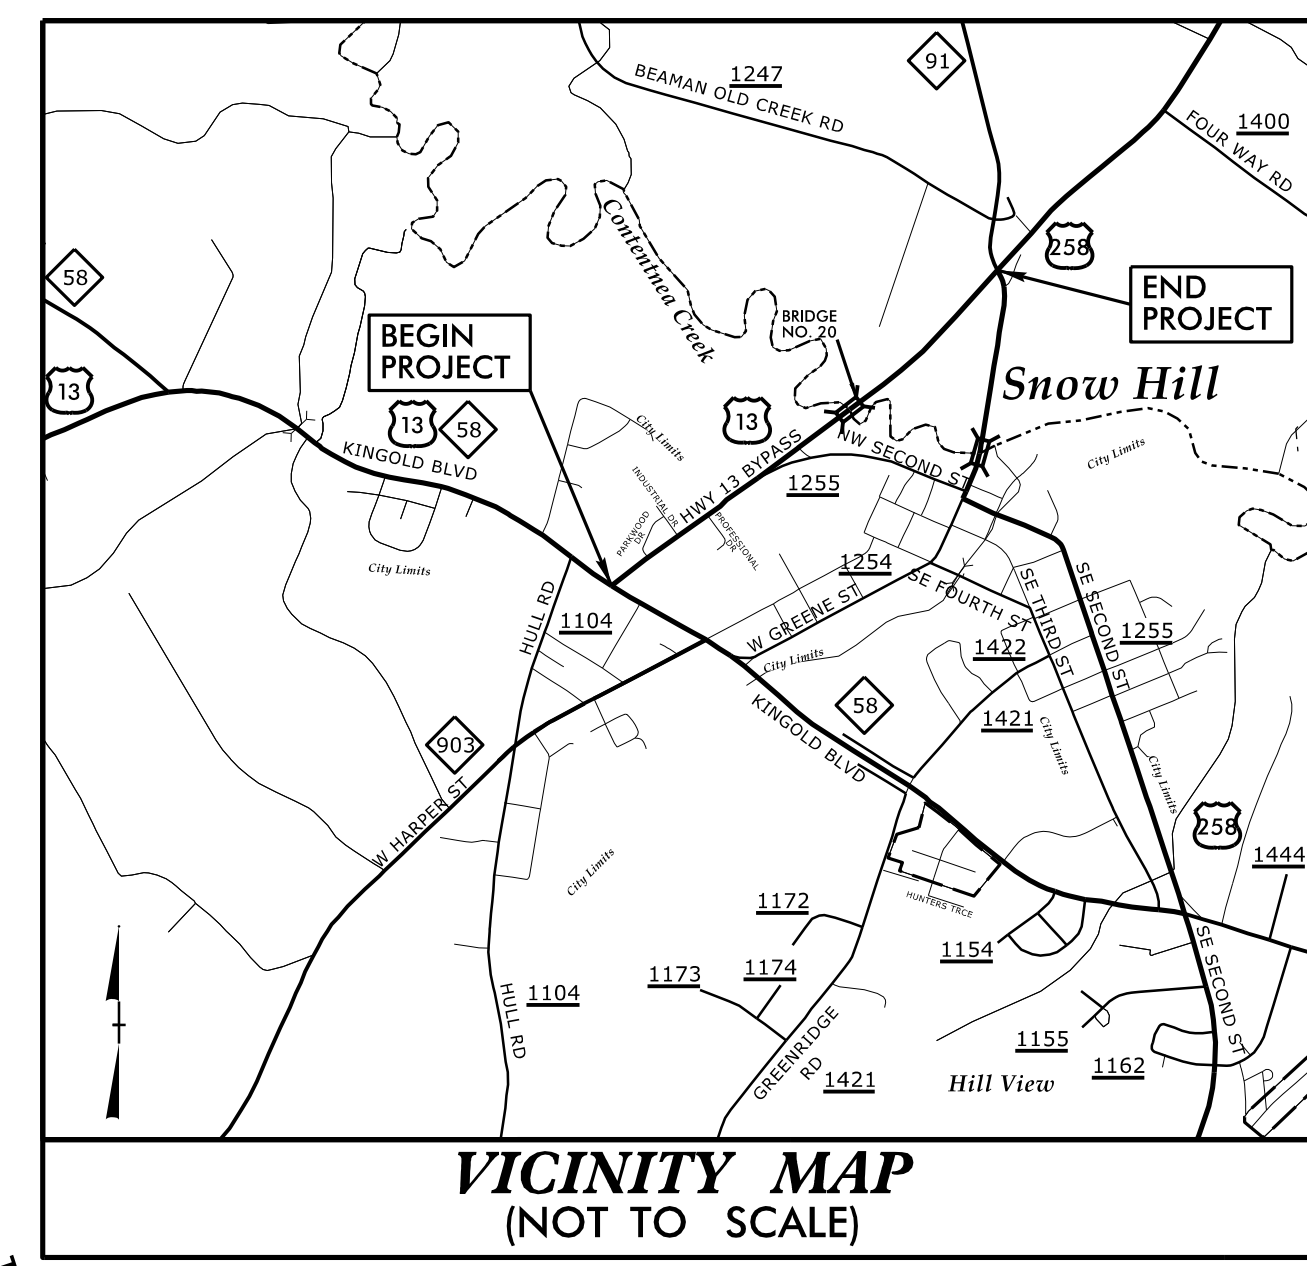

VICINITY MAP  
(NOT TO SCALE)



**END TIP PROJECT R-5812**  
-L- STA. 73 + 83.06

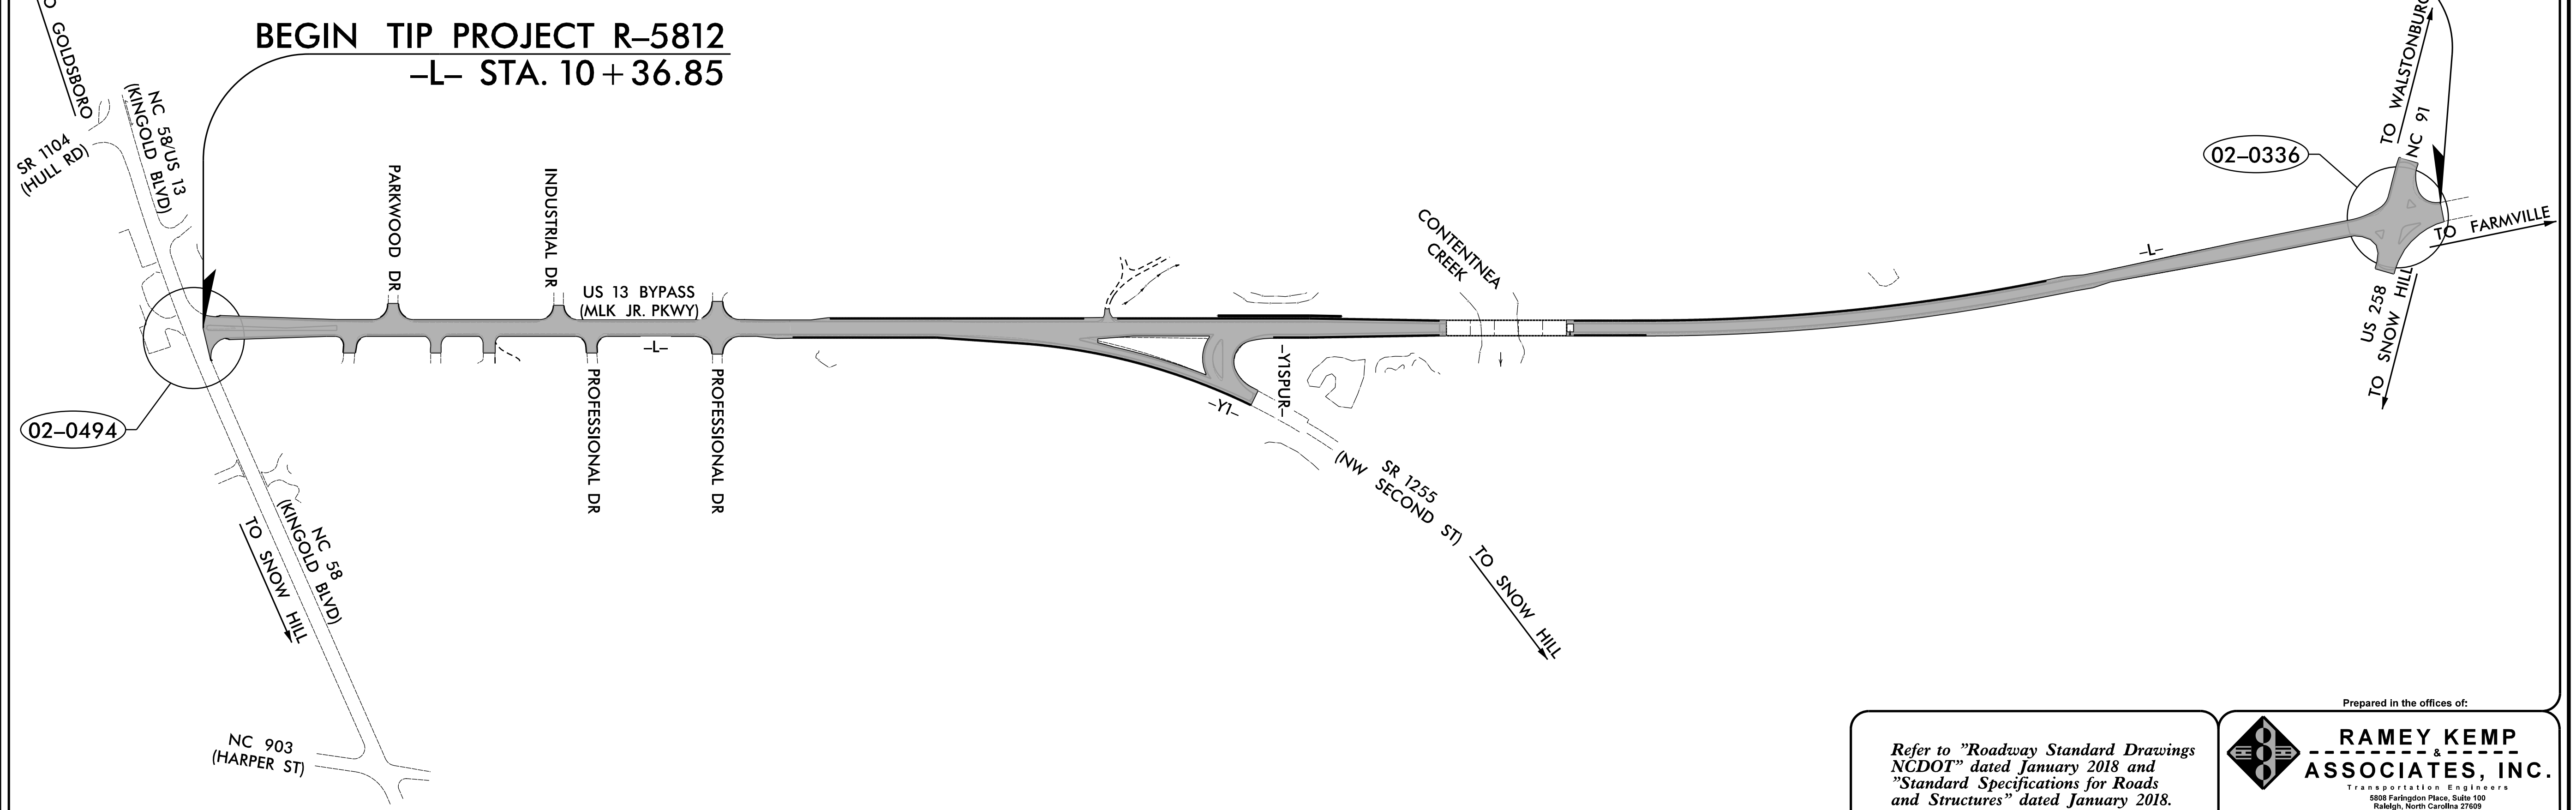

**PLANS PREPARED BY:**

**W. Jason Hamilton, P.E., PTOE – Project Manager**  
**Timothy S. Popelka, E.I. – Project Engineer**

**INDEX OF PLANS**

Sheet Number	SIN	Location/Description
Sig. 1.0	-	Title Sheet
Sig. 2.0-2.4	02-0494	US 13-NC 58/NC 58-903 at US 13-NC 903/GSH Corporation Entrance
Sig. 3.0-3.4	02-0336	US 13-258/NC 903 (MLK Jr. Pkwy.) at US 258/NC 91
Sig. 4.0	-	Standard Drawing for Electrical Service Grounding
Sig. 4.1	-	Standard Drawing for Pedestals
Sig. M1	-	NCDOT Metal Pole Standards
Sig. M2	-	Fabrication Details – All Metal Poles
Sig. M4	-	Fabrication Details – Mast Arm Poles
Sig. M5	-	Fabrication Details – Mast Arm Connection
Sig. M7	-	Construction Details – Foundations

**LEGEND**

○ XX-XXXX      SIGNAL INVENTORY NUMBER

**INTELLIGENT TRANSPORTATION  
AND SIGNALS UNIT**

**Zachary Little, P.E. – Eastern Region Signals Engineer**  
**D. Todd Joyce, P.E. – Signal Equipment Design Review Engineer**

Refer to "Roadway Standard Drawings  
NCDOT" dated January 2018 and  
"Standard Specifications for Roads  
and Structures" dated January 2018.

Prepared in the offices of:

**RAMEY KEMP & ASSOCIATES, INC.**  
Transportation Engineers  
5808 Farrington Place, Suite 100  
Raleigh, North Carolina 27609  
919-872-5115 Tel. 919-878-5416 Fax.  
www.rameykemp.com

6/17/2019  
...\\04-Design\R-5812-tsh.dgn  
User: jhamilton

PHASING DIAGRAM


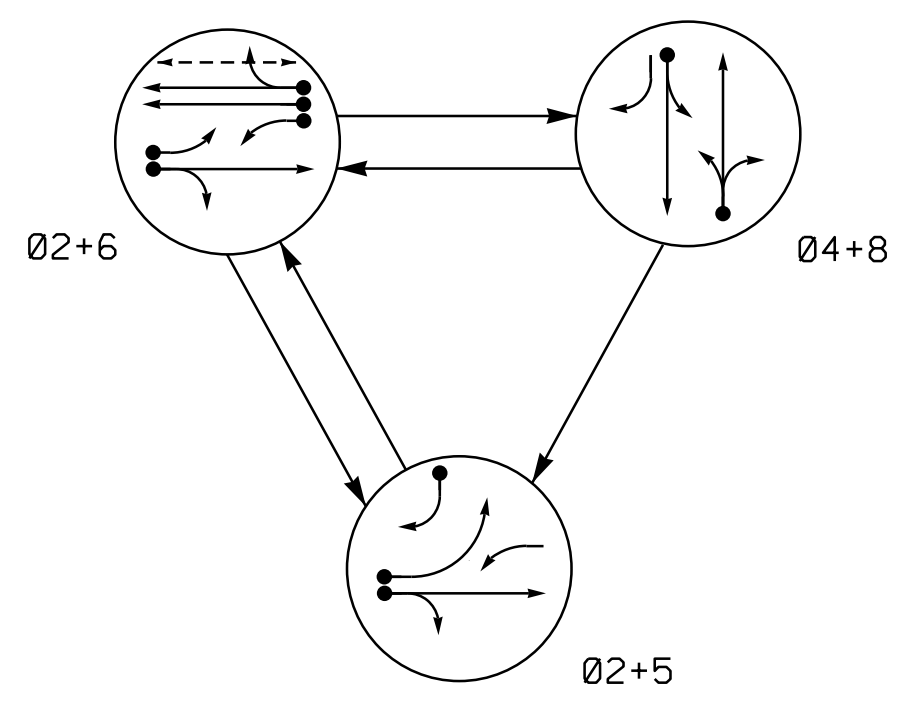


TABLE OF OPERATION

SIGNAL FACE	PHASE				
	02+5	02+6	04+8	FLASH	H
21,22,23	G	G	R	Y	
41	R	R	G	R	
42	R	R	G	R	
51	F	F	R	Y	
61	F	F	R	Y	
62,63	R	G	R	Y	
81,82	R	R	G	R	
P61,P62	DW	W	DW	DRK	

SIGNAL FACE I.D.

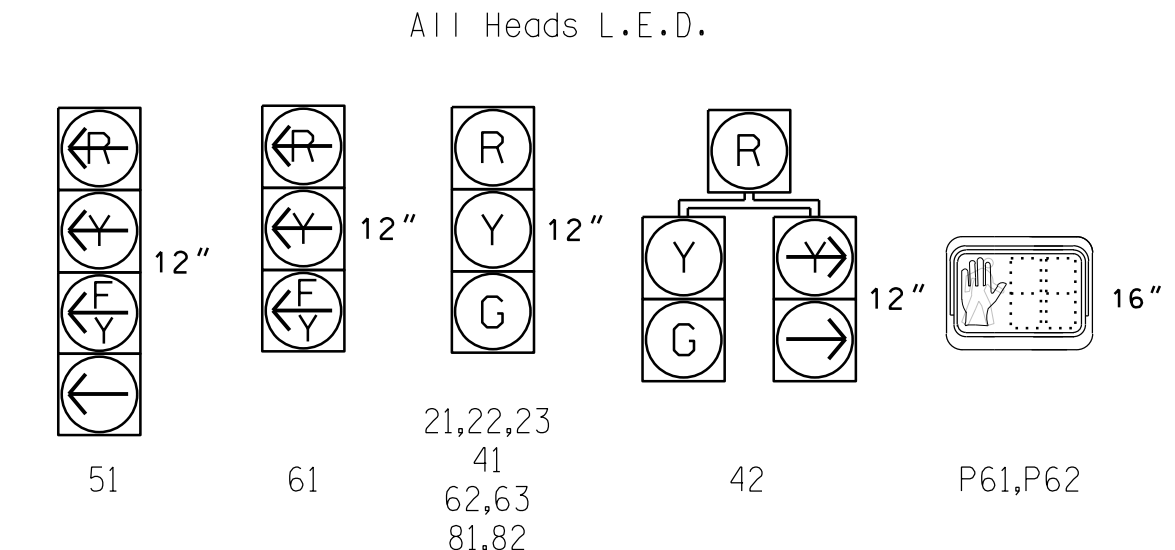

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART



LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING					SYSTEM LOOP	NEW CARD
					PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME		
2A	6X6	70	EXIST	-	2	Y	Y	-	-	-	-
4A	6X40	0	2-4-2	Y	4	Y	Y	-	-	-	-
5A	6X60	+5	2-4-2	-	2	Y	Y	-	-	-	-
5B	6X40	0	2-4-2	Y	5	Y	Y	-	-	15	-
6A	6X6	70	4	Y	6	Y	Y	-	-	-	-
6B	6X6	70	4	Y	6	Y	Y	-	-	-	-
6C	6X40	0	2-4-2	Y	6	Y	Y	-	-	-	Y
8A	6X60	+5	2-4-2	-	8	Y	Y	-	-	10	-

3 Phase Fully Actuated US 13-258 (Kingold Blvd) TBS

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 5 may be lagged.
- Set all detector units to presence mode.
- In the event of loop replacement, refer to the current ITS and Signals Design Manual and submit a Plan of Record to the Signal Design Section.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values shall supersede these values.

PHASING DIAGRAM DETECTION LEGEND

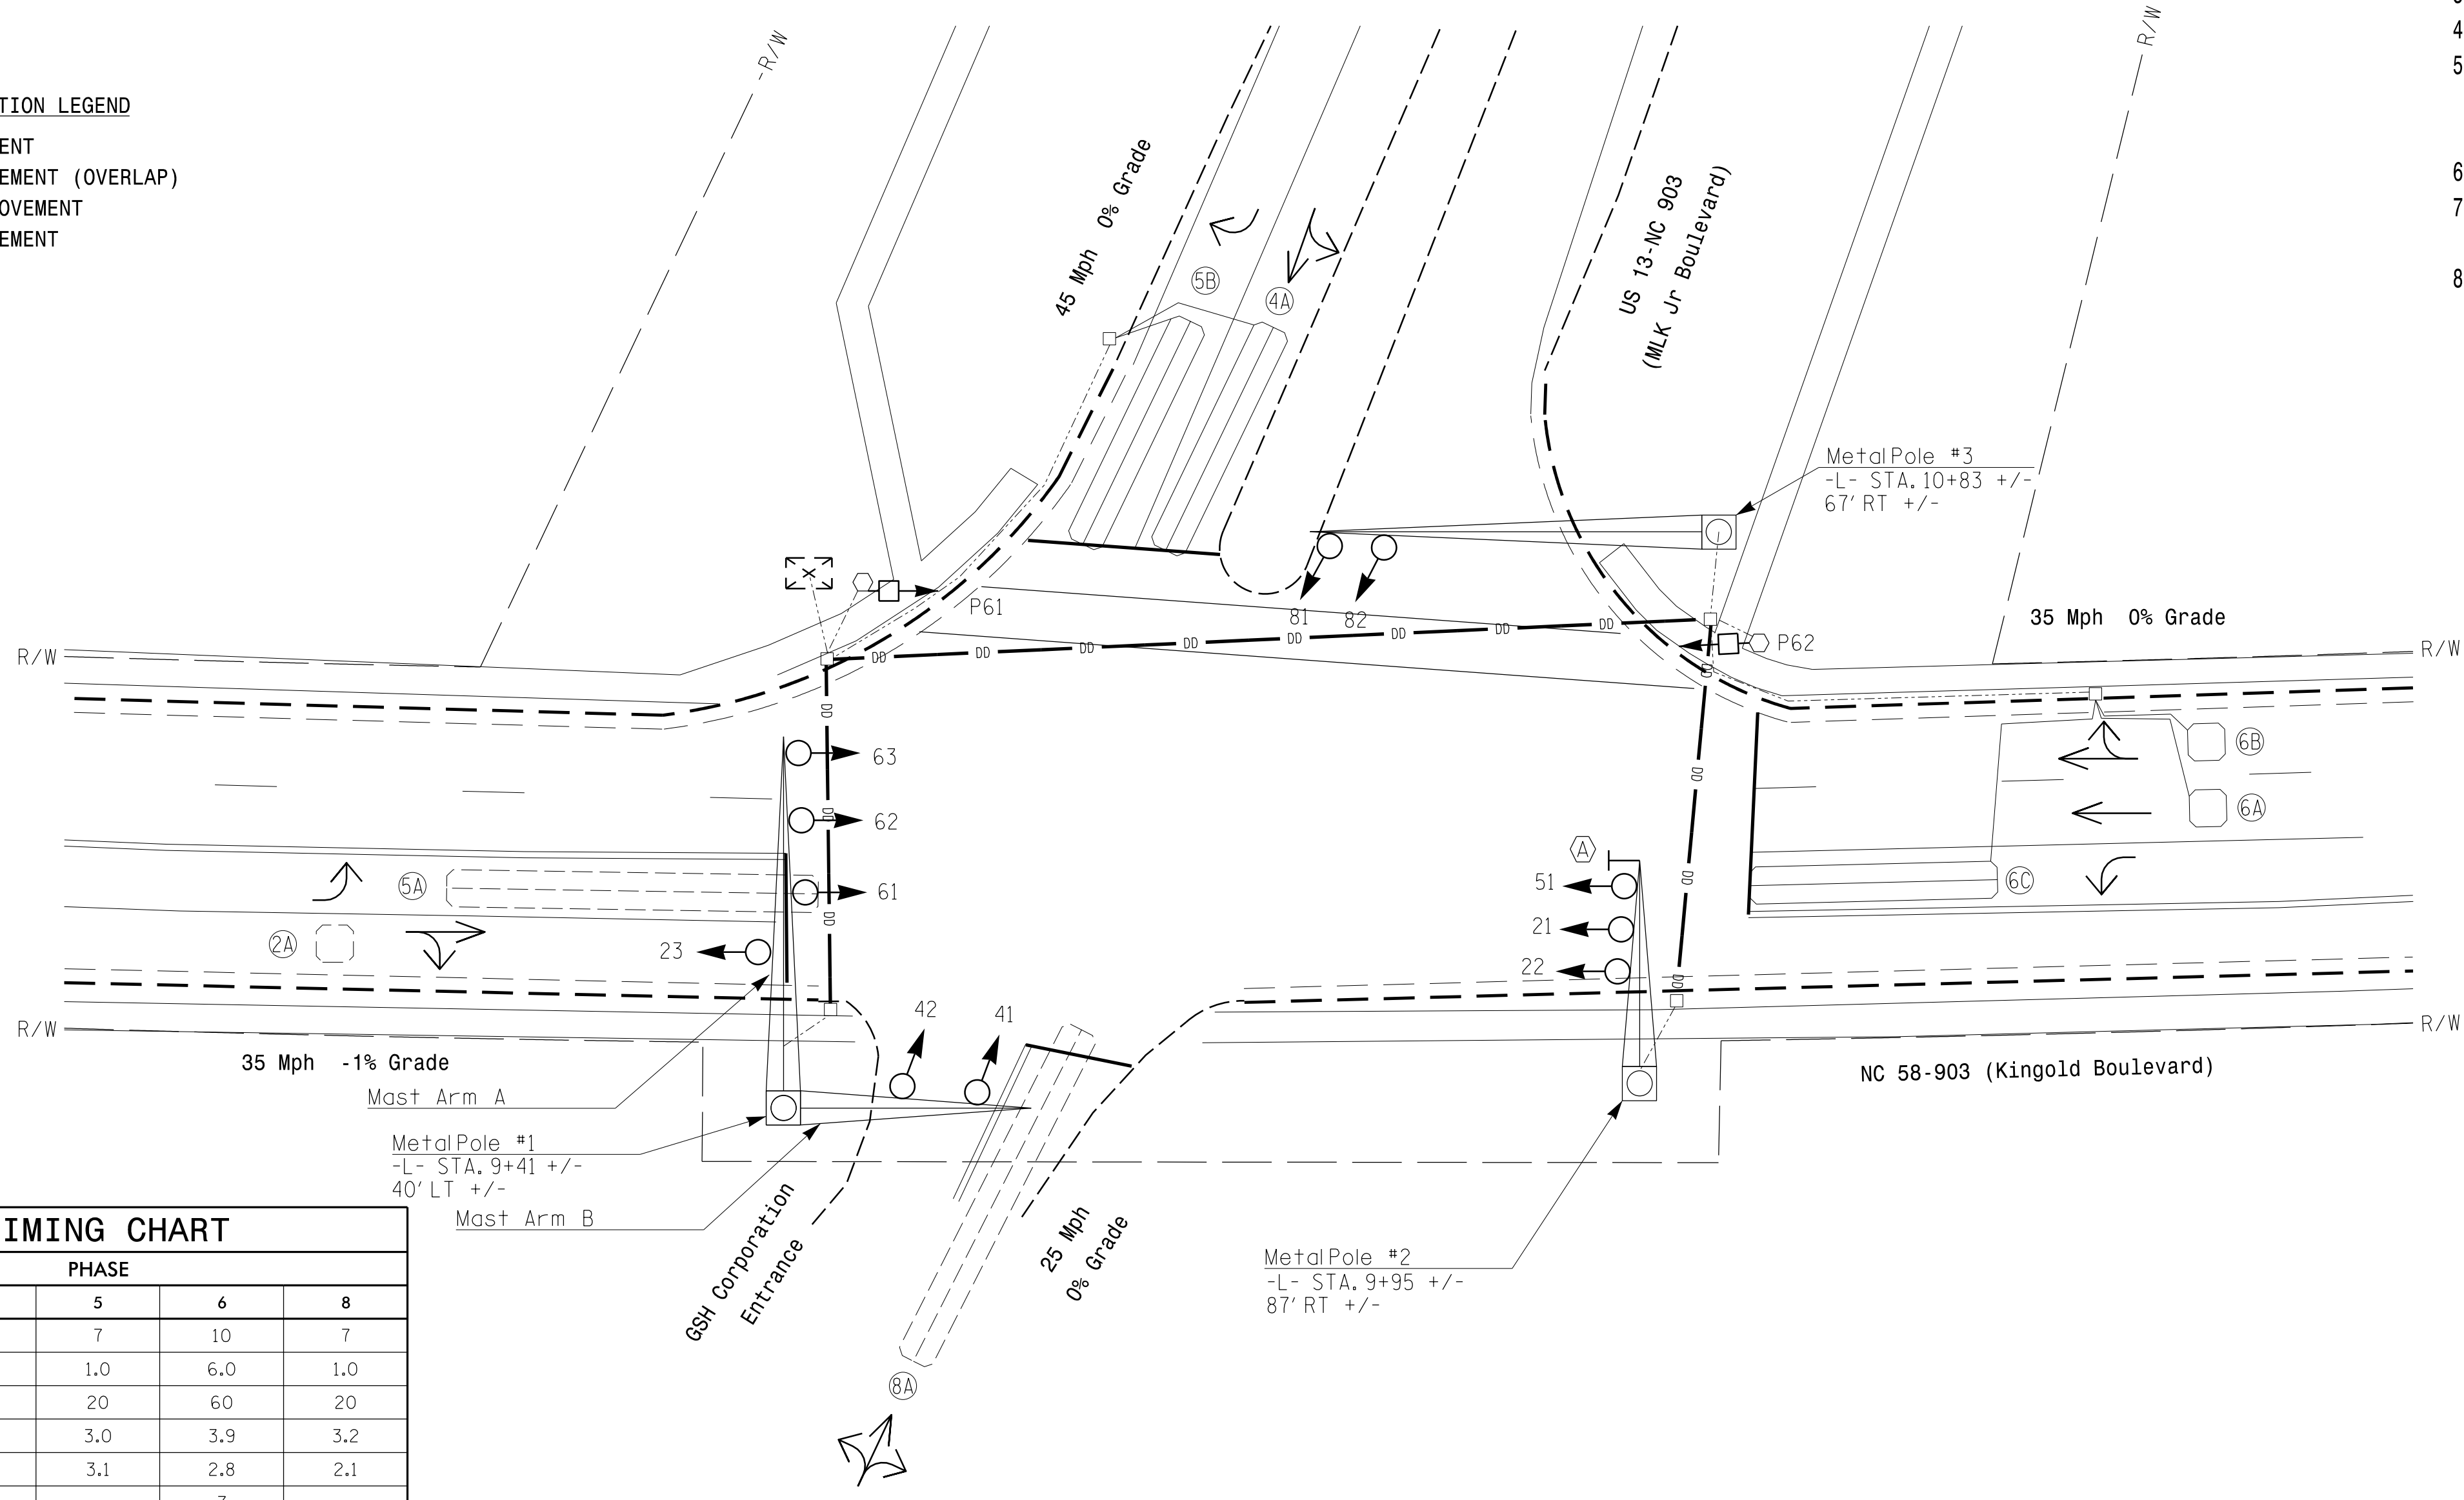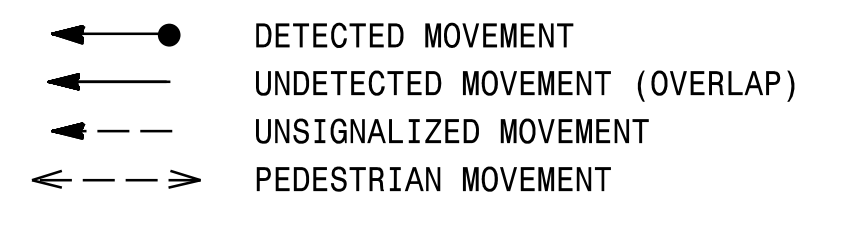


OASIS 2070 TIMING CHART

FEATURE	PHASE				
	2	4	5	6	8
Min Green 1 *	10	7	7	10	7
Extension 1 *	3.0	2.0	1.0	6.0	1.0
Max Green 1 *	60	20	20	60	20
Yellow Clearance	3.9	4.5	3.0	3.9	3.2
Red Clearance	2.8	1.3	3.1	2.8	2.1
Walk 1 *	-	-	-	7	-
Don't Walk 1	-	-	-	31	-
Seconds Per Actuation *	-	-	-	-	-
Max Variable Initial *	-	-	-	-	-
Time Before Reduction *	-	-	-	-	-
Time To Reduce *	-	-	-	-	-
Minimum Gap	-	-	-	-	-
Recall Mode	MIN RECALL	-	-	MIN RECALL	-
Vehicle Call Memory	YELLOW	-	-	YELLOW	-
Dual Entry	-	ON	-	-	ON
Simultaneous Gap	ON	ON	ON	ON	ON

\* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

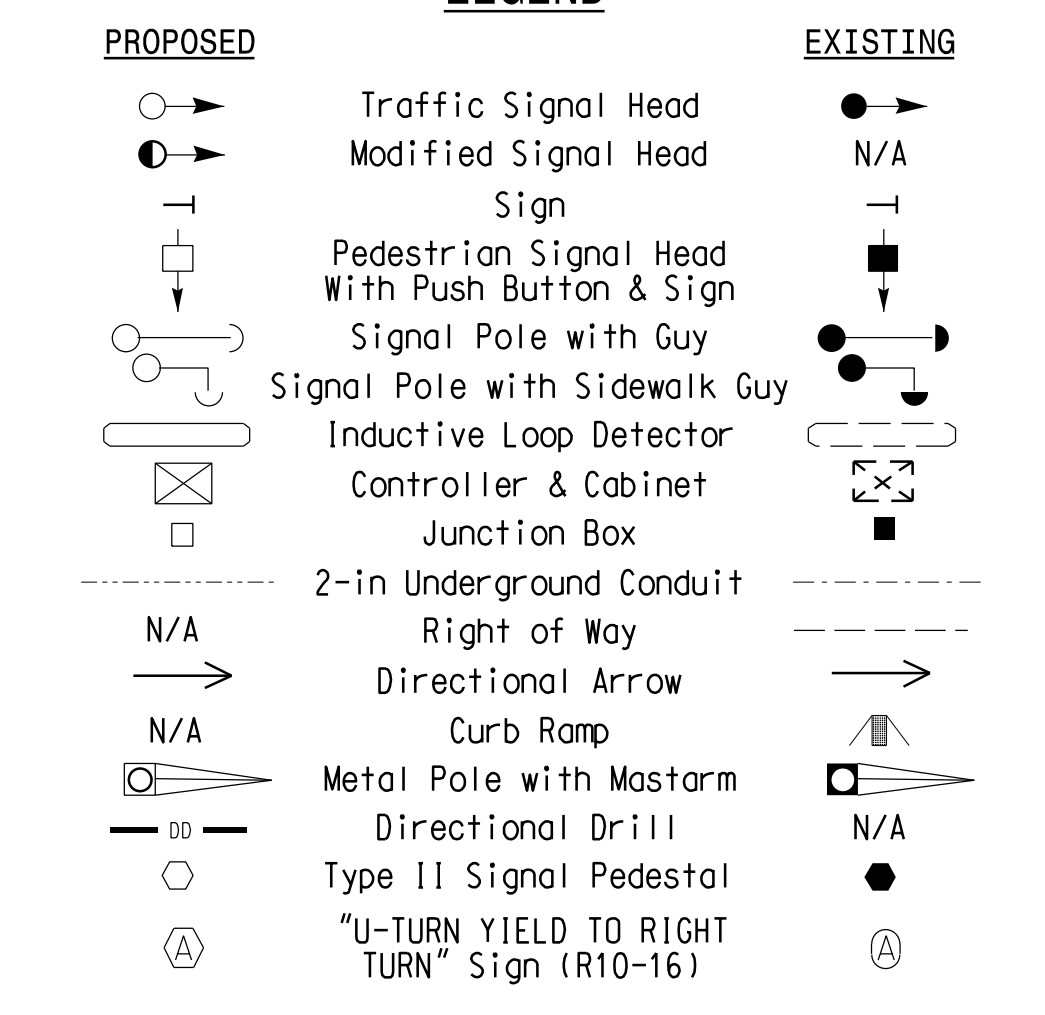

Signal Upgrade

RAMEY KEMP ASSOCIATES, INC. logo and contact information.

Professional Engineer seal for William J. Hamilton, State of North Carolina.


Project information: US 13-NC 58/ NC 58-903 at GSH Corporation Entrance. Includes dates and signatures.

Professional Engineer seal for William J. Hamilton, State of North Carolina.

### EDI MODEL 2018ECL-NC CONFLICT MONITOR

#### PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

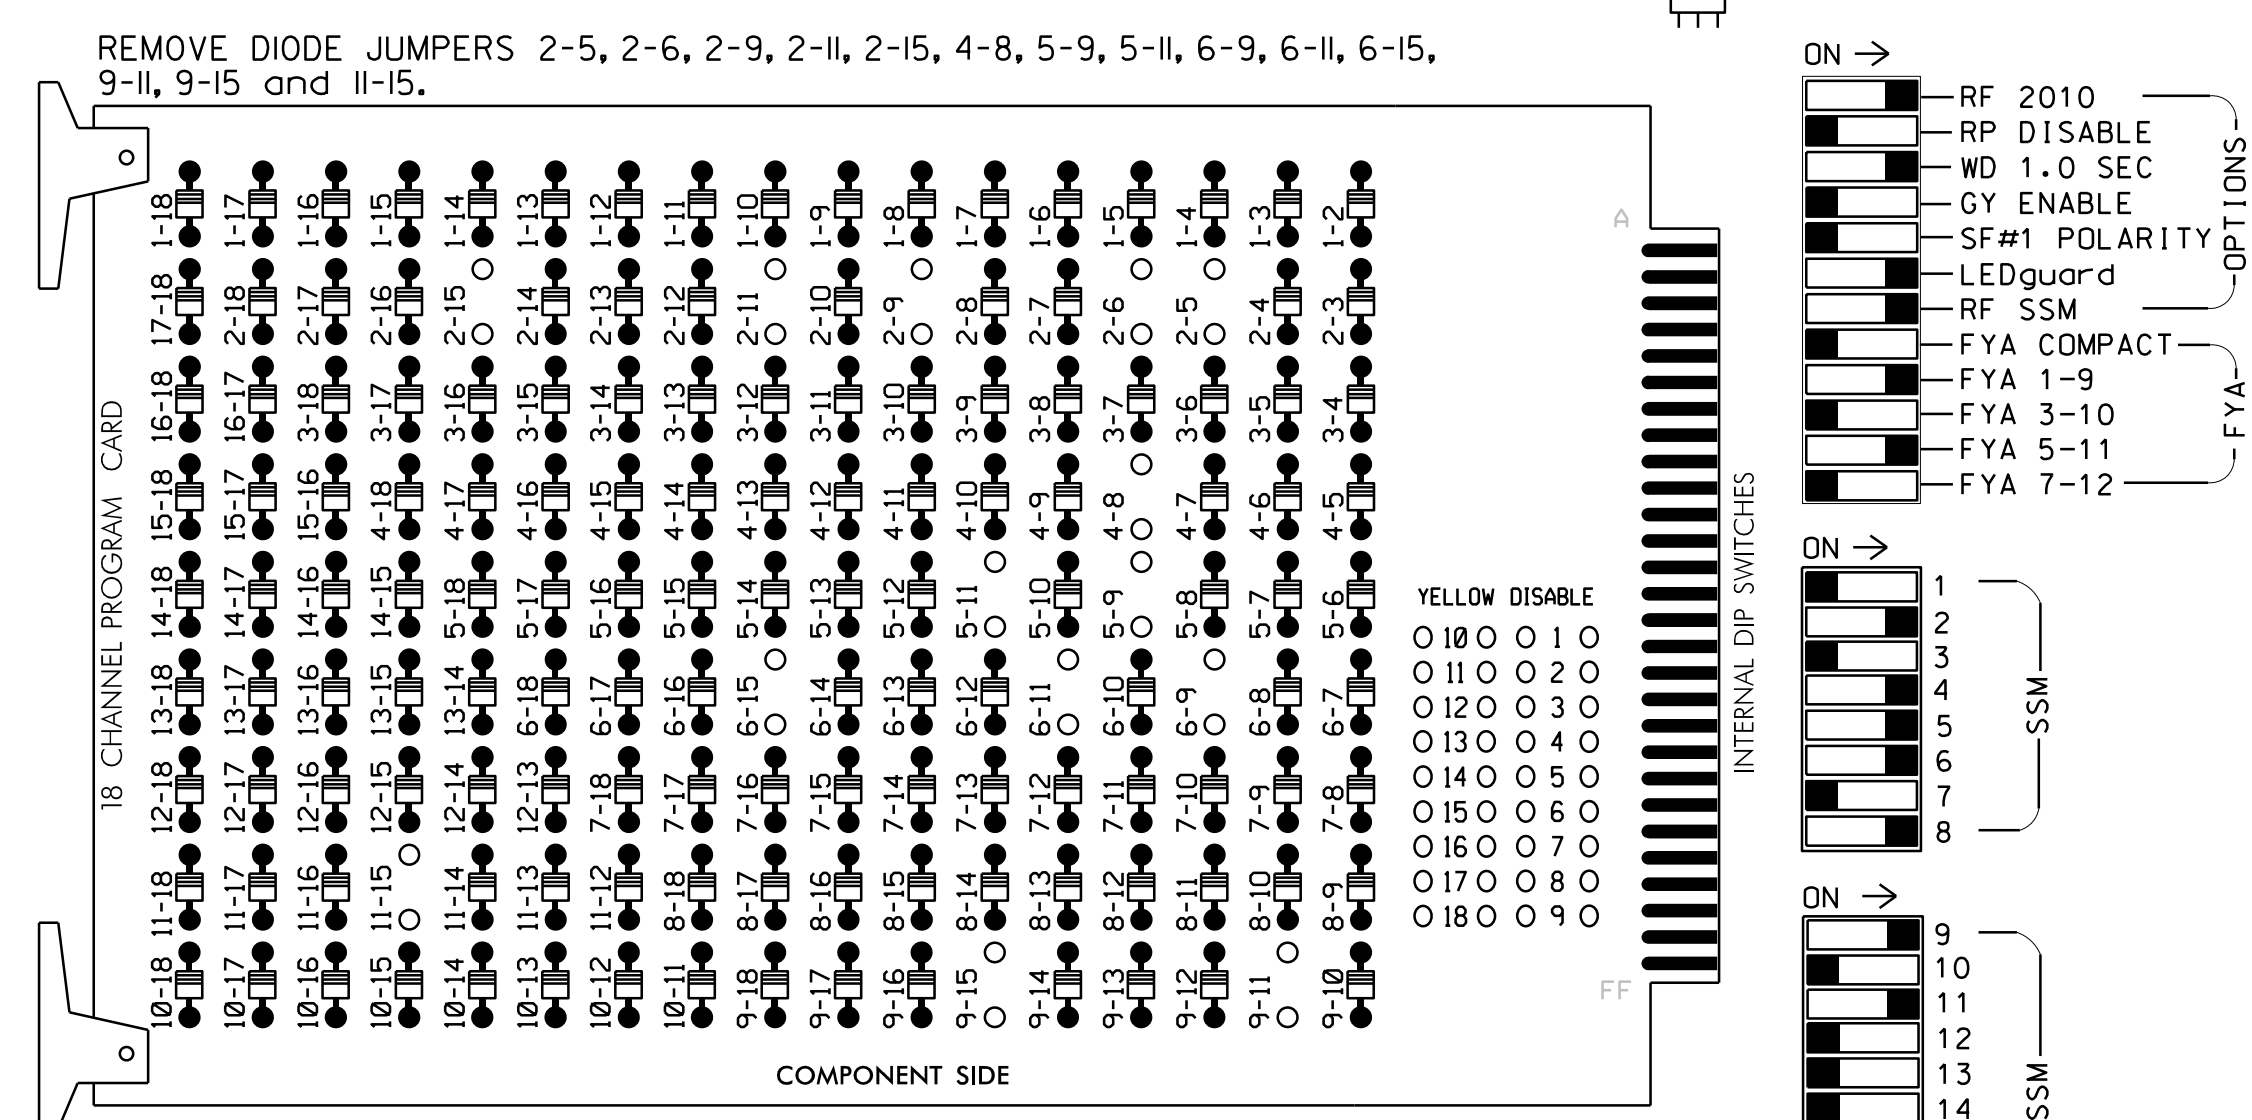

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

### NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Enable Simultaneous Gap-Out for all Phases.
- Program phases 2 and 6 for Startup In Green.
- Program phase 6 for Startup Ped Call.
- Program phases 2 and 6 for Yellow Flash and overlap 1 as Wag Overlaps.
- The cabinet and controller are part of the US 13-258 (Kingold Blvd) TBS.

### EQUIPMENT INFORMATION

CONTROLLER.....2070  
 CABINET.....332 /W/ AUX  
 SOFTWARE.....ECONOLITE OASIS  
 CABINET MOUNT.....BASE  
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE  
 LOAD SWITCHES USED.....S2,S5,S7,S8,S9,S11,AUX S1,AUX S4  
 PHASES USED.....2,4,5,6,6PED,8  
 OVERLAP "A".....2  
 OVERLAP "B".....NOT USED  
 OVERLAP "C".....5+6  
 OVERLAP "D".....NOT USED


### SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	NU	21,22,23	NU	NU	41,42	NU	42	51	62,63	P61, P62	NU	81,82	61	NU	NU	51	NU	NU
RED		128			101		*		134		107							
YELLOW		129			102				135		108							
GREEN		130			103				136		109							
RED ARROW													A121			A114		
YELLOW ARROW								132					A122			A115		
FLASHING YELLOW ARROW													A123			A116		
GREEN ARROW							133	133										
Hand icon											119							
Walking person icon											121							

NU = Not Used  
 \* Denotes install load resistor. See load resistor installation detail this sheet.  
 ★ See pictorial of head wiring in detail below.

### INPUT FILE POSITION LAYOUT

(front view)

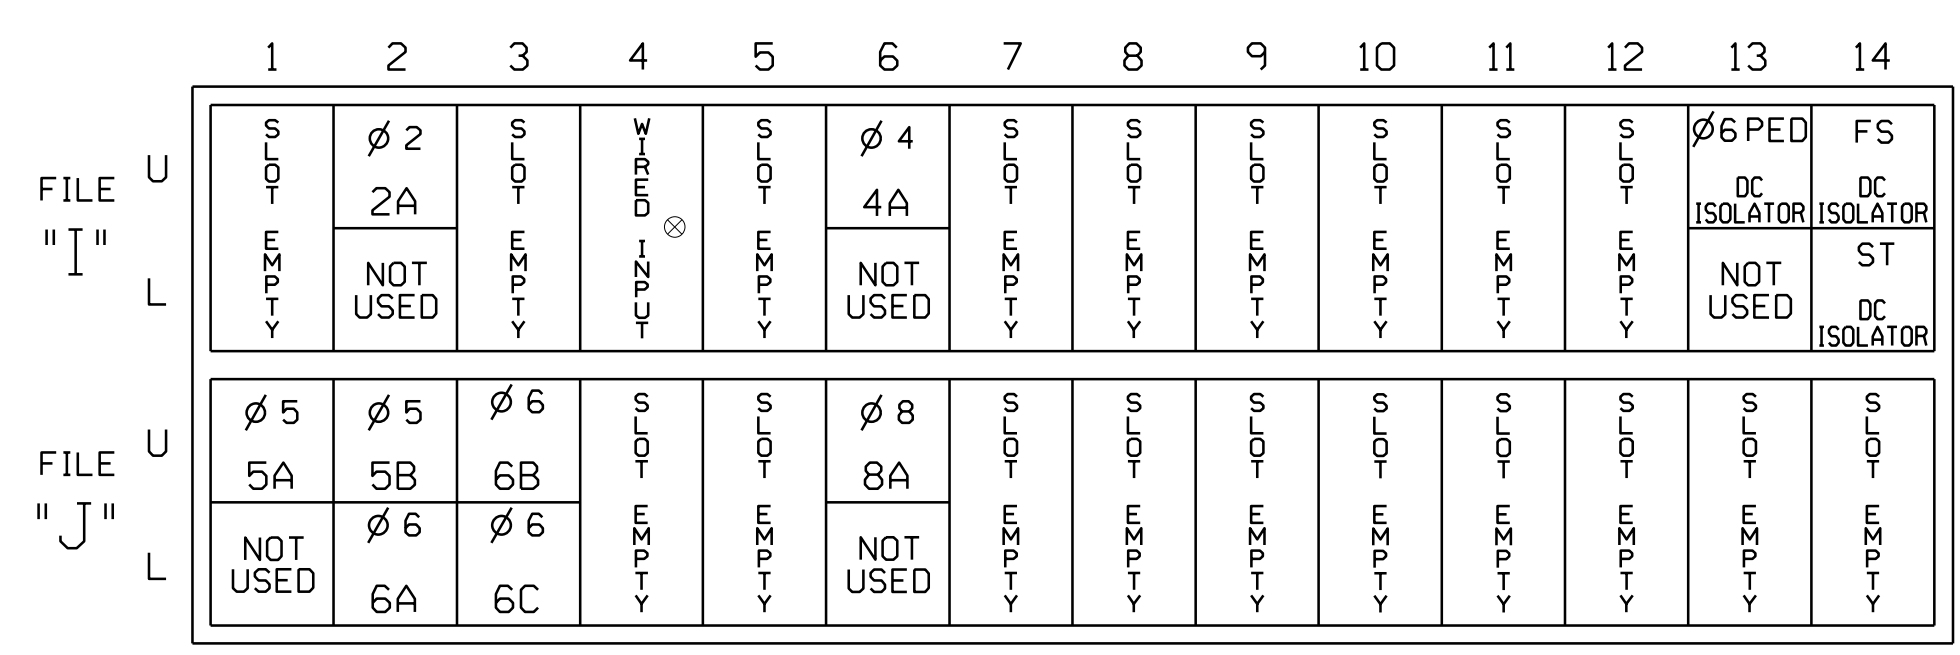

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE  
 ST = STOP TIME

⊗ Wired Input - Do not populate slot with detector card


### INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
2A	TB2-5,6	I2U	39	1	2	2	Y	Y			
4A	TB4-9,10	I6U	41	3	4	4	Y	Y			
5A <sup>1</sup>	TB3-1,2	J1U	55	17	5	5	Y	Y			15
		I4U	47	9	22	2	Y	Y			
5B	TB3-5,6	J2U	40	2	6	5	Y	Y			15
6A	TB3-7,8	J2L	44	6	16	6	Y	Y			
6B	TB3-9,10	J3U	64	26	36	6	Y	Y			
6C	TB3-11,12	J3L	77	39	46	6	Y	Y			
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			10
PED PUSH BUTTONS											
P61,P62	TB8-7,9	I13U	68	30	PED 6	6 PED					

NOTE:  
 INSTALL DC ISOLATOR IN INPUT FILE SLOT 113.


<sup>1</sup>Add jumper from J1-W to 14-W, on rear of input file.

#### INPUT FILE POSITION LEGEND: J2L

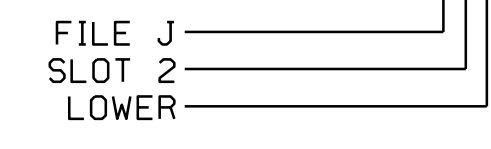

### FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

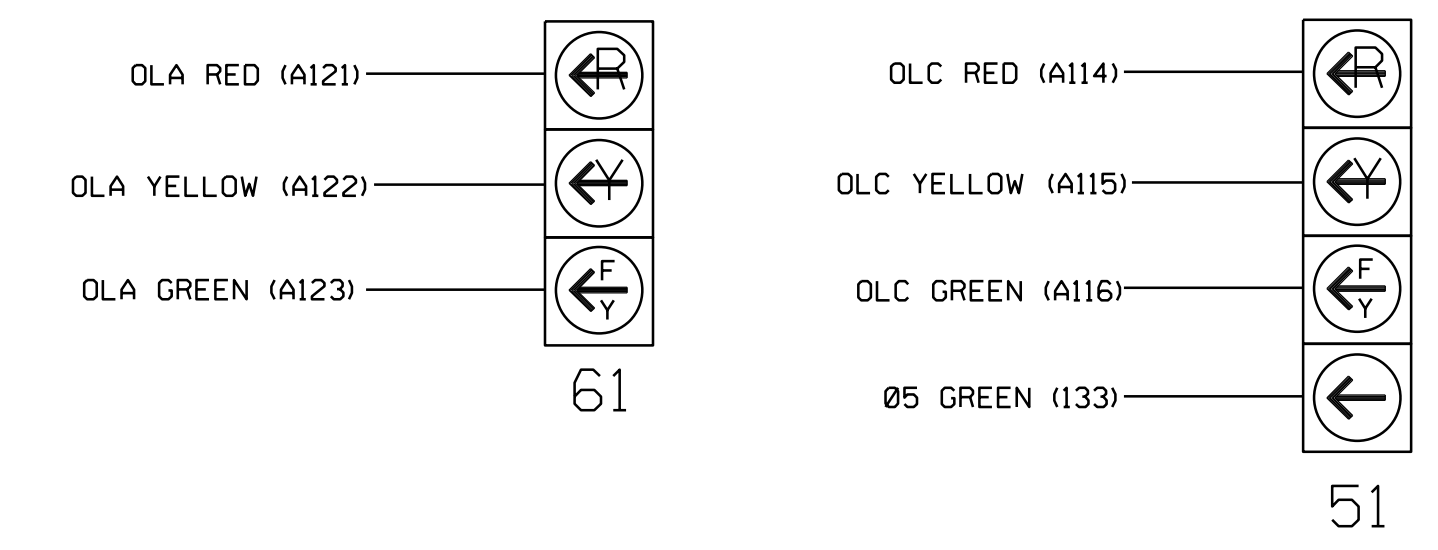


NOTE

- The sequence display for signal head 51 requires special programming. See sheet 2 of 2 for programming instructions.

### LOAD RESISTOR INSTALLATION DETAIL

(install resistor as shown below)

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

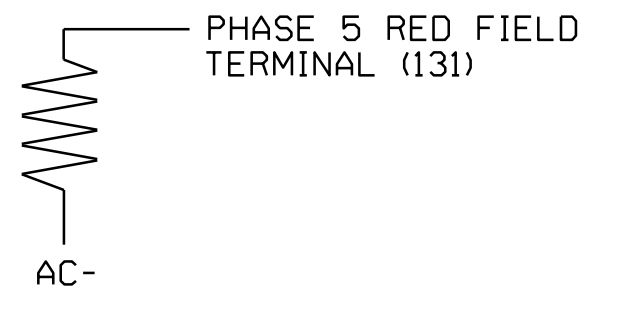

### COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

### Electrical Detail Sheet 1 of 2

Electrical and Programming Details For:

US 13-NC 58/ NC 58-903  
 at  
 US 13-NC 903/  
 GSH Corporation Entrance  
 Division 2 Greene County Snow Hill

PLAN DATE: June 2019 REVIEWED BY: WJ Hamilton  
 PREPARED BY: TS Popelka RKA PROJ. NO: 17346 (040)

750 N. Greenfield Pkwy, Garner, NC 27529

Prepared in the offices of:

**RAMEY KEMP ASSOCIATES, INC.**  
 Transportation Engineers  
 5808 Raleigh Plaza, Suite 100  
 Raleigh, North Carolina 27609  
 919-872-9115 Tel. 919-872-4116 Fax  
 www.rameykemp.com

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL  
 NORTH CAROLINA PROFESSIONAL ENGINEER  
 SEAL 32396  
 WILLIAM J. HAMILTON




William J. Hamilton 6-11-19  
 SIGNATURE DATE

SIG. INVENTORY NO. 02-0494

### LOGICAL I/O PROCESSOR PROGRAMMING DETAIL TO PRODUCE SPECIAL FYA-PPLT SIGNAL SEQUENCE

(program controller as shown below)

- FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2 AND 3.
- FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).

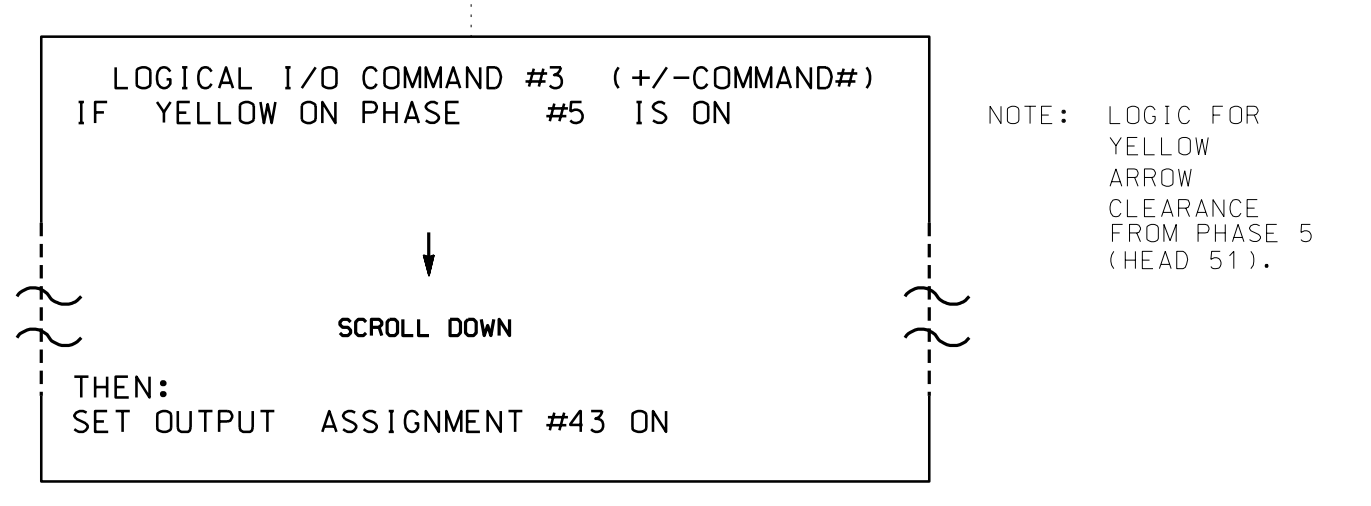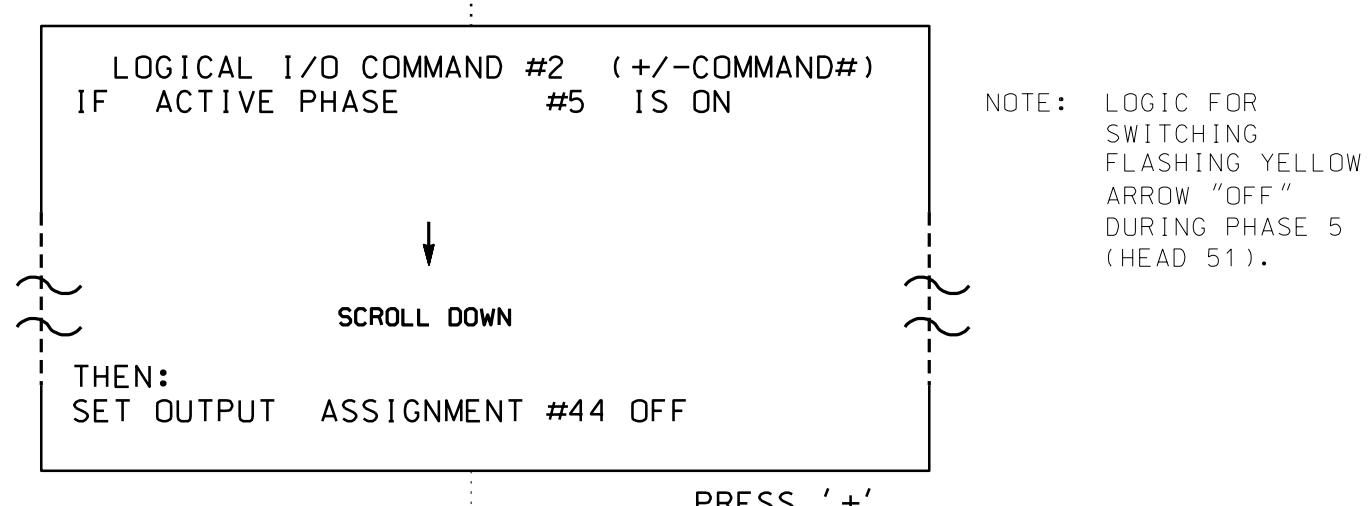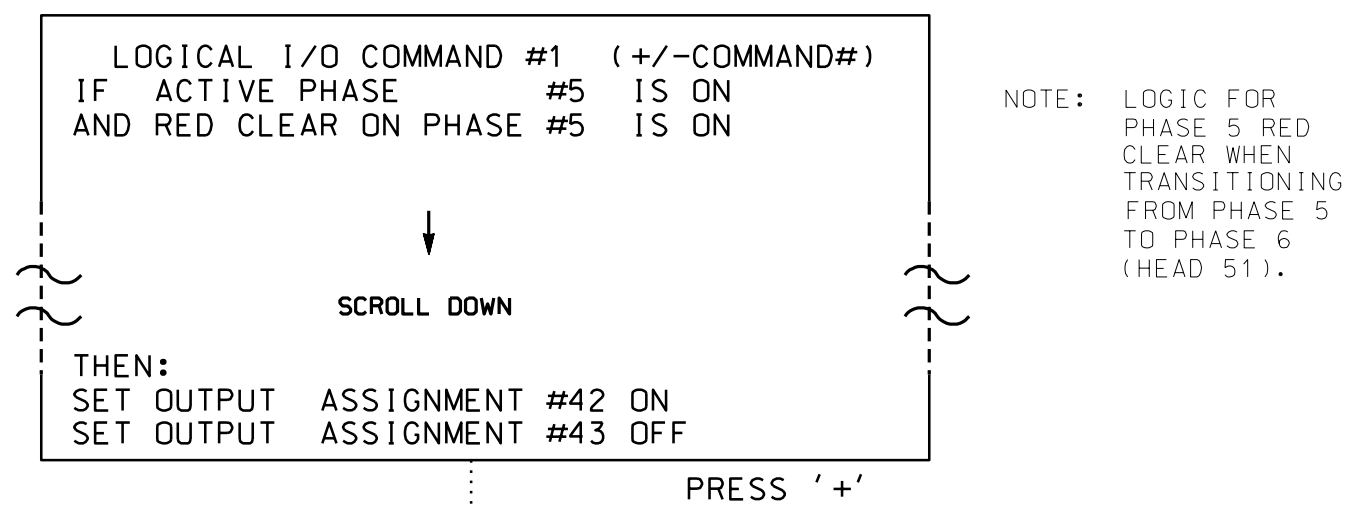

LOGIC I/O PROCESSOR PROGRAMMING COMPLETE

OUTPUT REFERENCE SCHEDULE	
OUTPUT 42	= Overlap C Red
OUTPUT 43	= Overlap C Yellow
OUTPUT 44	= Overlap C Green

### OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS  
 PHASE: :12345678910111213141516  
 VEH OVL PARENTS: : X  
 VEH OVL NOT VEH: :  
 VEH OVL NOT PED: :  
 VEH OVL GRN EXT: :  
 STARTUP COLOR: - RED - YELLOW - GREEN  
 FLASH COLORS: - RED - YELLOW X GREEN ← NOTICE GREEN FLASH  
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)  
 FLASH YELLOW IN CONTROLLER FLASH?...Y  
 GREEN EXTENSION (0-255 SEC)...0.0  
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0  
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0  
 OUTPUT AS PHASE # (0=NONE, 1-16)...0


PRESS '+' TWICE

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS  
 PHASE: :12345678910111213141516  
 VEH OVL PARENTS: : XX  
 VEH OVL NOT VEH: :  
 VEH OVL NOT PED: :  
 VEH OVL GRN EXT: :  
 STARTUP COLOR: - RED - YELLOW - GREEN  
 FLASH COLORS: - RED - YELLOW X GREEN ← NOTICE GREEN FLASH  
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)  
 FLASH YELLOW IN CONTROLLER FLASH?...Y  
 GREEN EXTENSION (0-255 SEC)...0.0  
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0  
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0  
 OUTPUT AS PHASE # (0=NONE, 1-16)...0

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR  
 THE SIGNAL DESIGN: 02-0494  
 DESIGNED: Jun 2019  
 SEALED: 6-11-19  
 REVISED: N/A

Electrical Detail  
Sheet 2 of 2

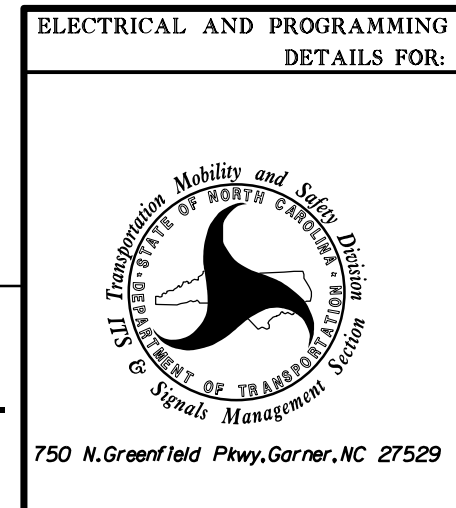


Prepared in the offices of:  
**RAMEY KEMP ASSOCIATES, INC.**  
 Transportation Engineers  
 5808 Raleigh Plaza, Suite 100  
 Raleigh, North Carolina 27609  
 919-872-9115 Tel, 919-872-5416 Fax  
 www.rameykemp.com

ELECTRICAL AND PROGRAMMING DETAILS FOR:		US 13-NC 58/ NC 58-903	
		at	
		US 13-NC 903/	
		GSH Corporation Entrance	
		Division 2 Greene County Snow Hill	
PLAN DATE:	June 2019	REVIEWED BY:	WJ Hamilton
PREPARED BY:	TS Popelka	RKA PROJ. NO.:	17346 (040)
REVISIONS	INIT.	DATE	

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL  
 NORTH CAROLINA PROFESSIONAL ENGINEER  
 SEAL 32396  
 WILLIAM J. HAMILTON  
 William J. Hamilton 6-11-19  
 SIGNATURE DATE  
 SIG. INVENTORY NO. 02-0494


**Design Loading for METAL POLE NO. 1, MAST ARM A**

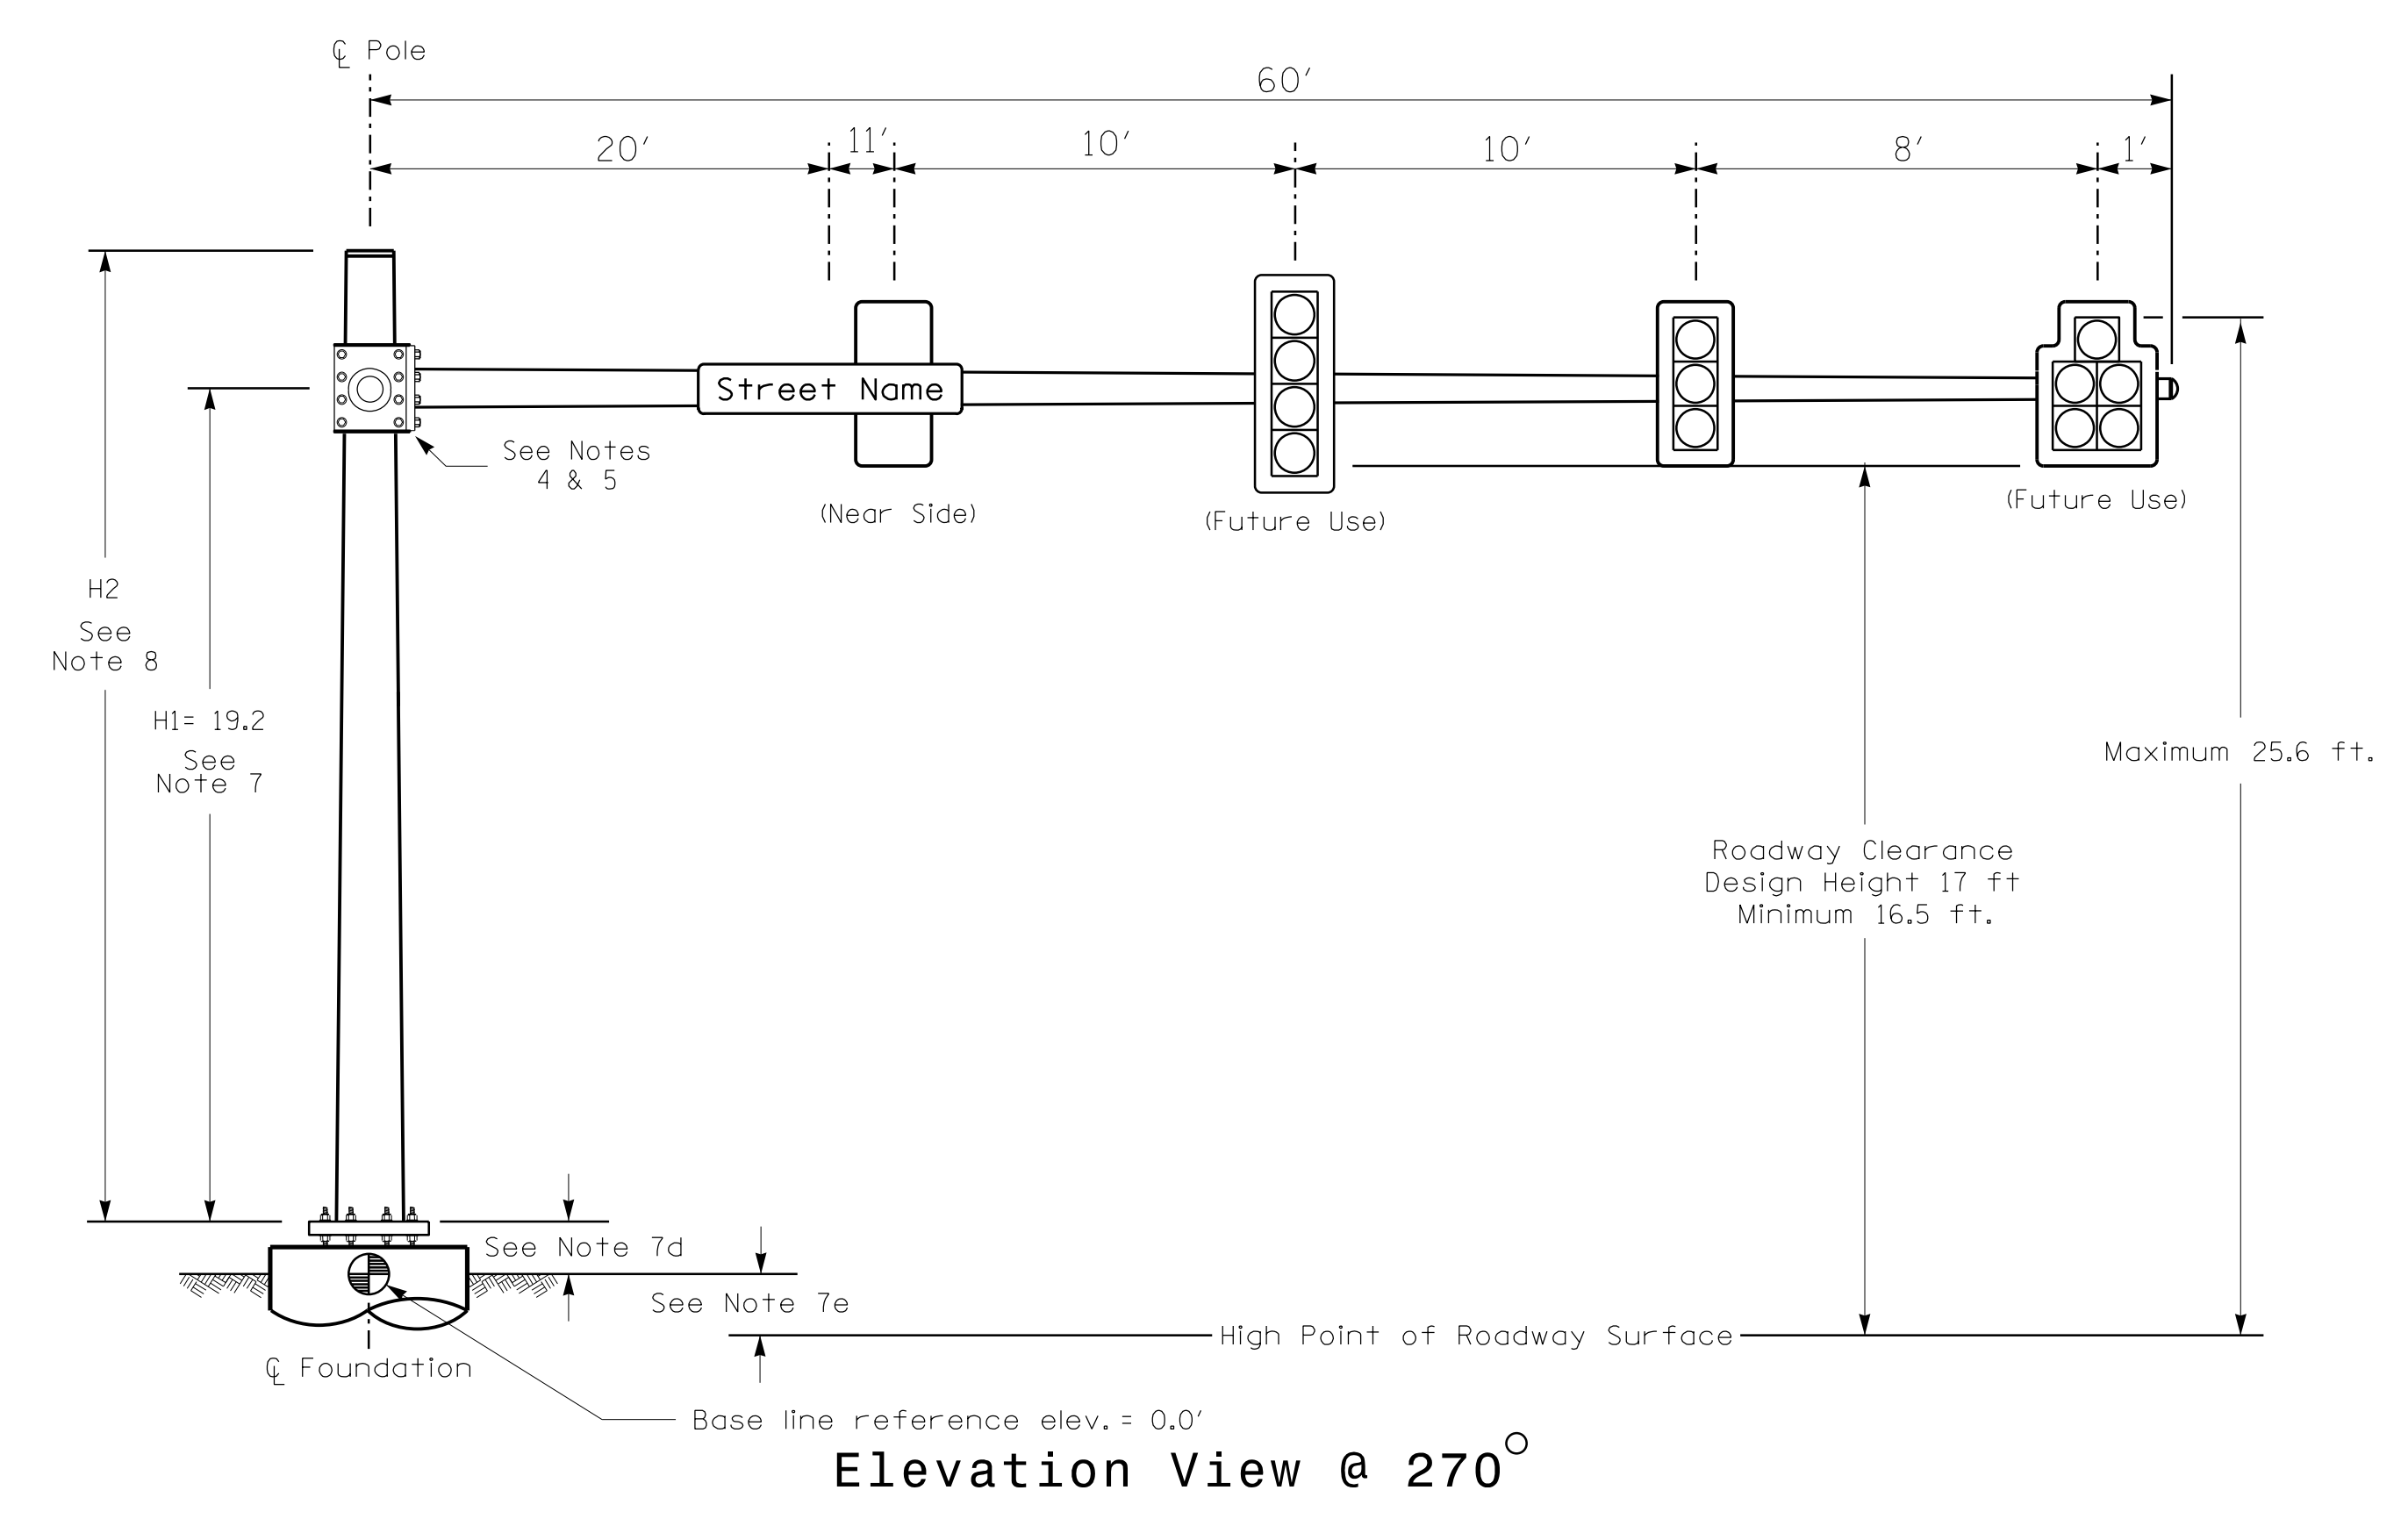




**SPECIAL NOTE**  
 The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

**Elevation Data for Mast Arm Attachment (H1)**

Elevation Differences for:	Pole 1A	Pole 1B
Baseline reference point at $\odot$ Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+ 0.2 ft.	-0.4 ft.
Elevation difference at Edge of travelway or face of curb	0.0 ft.	-0.5 ft.

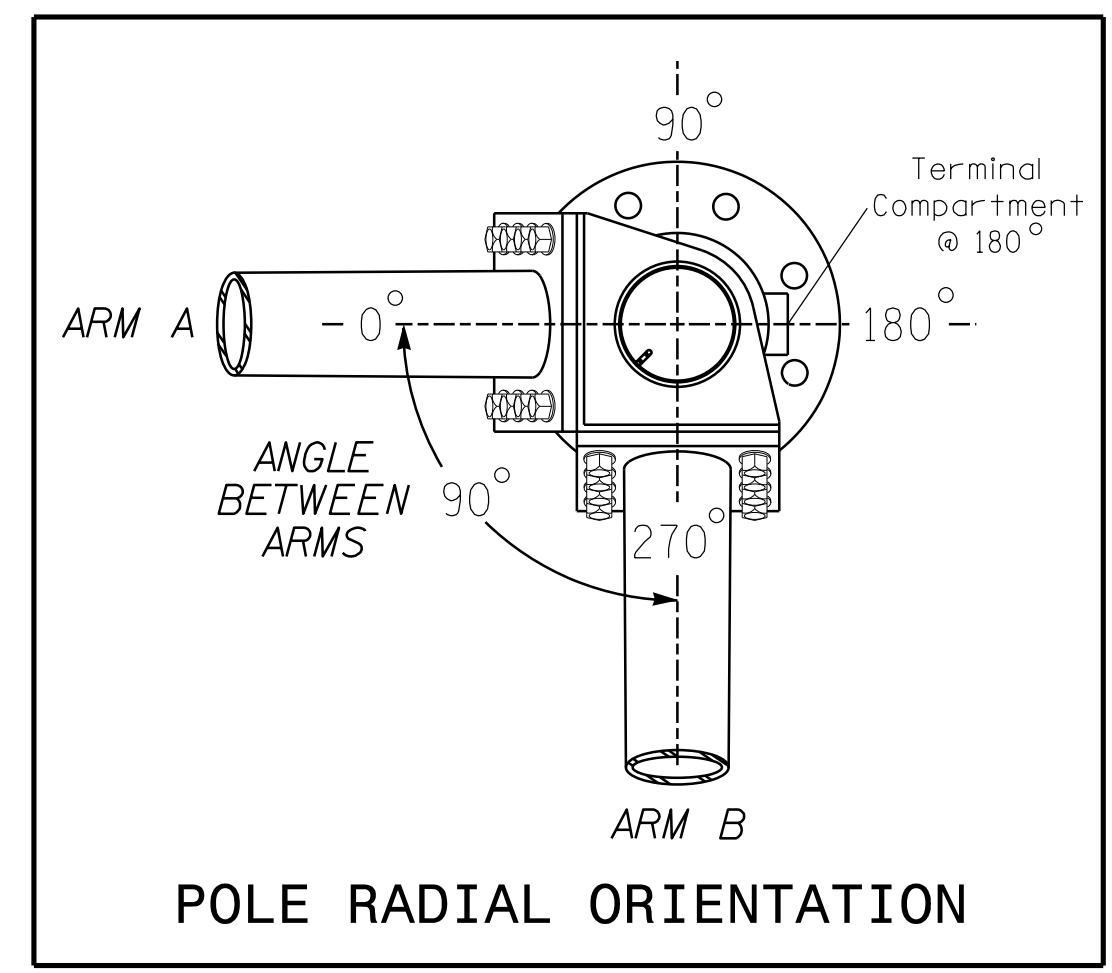

**Design Loading for METAL POLE NO. 1, MAST ARM B**

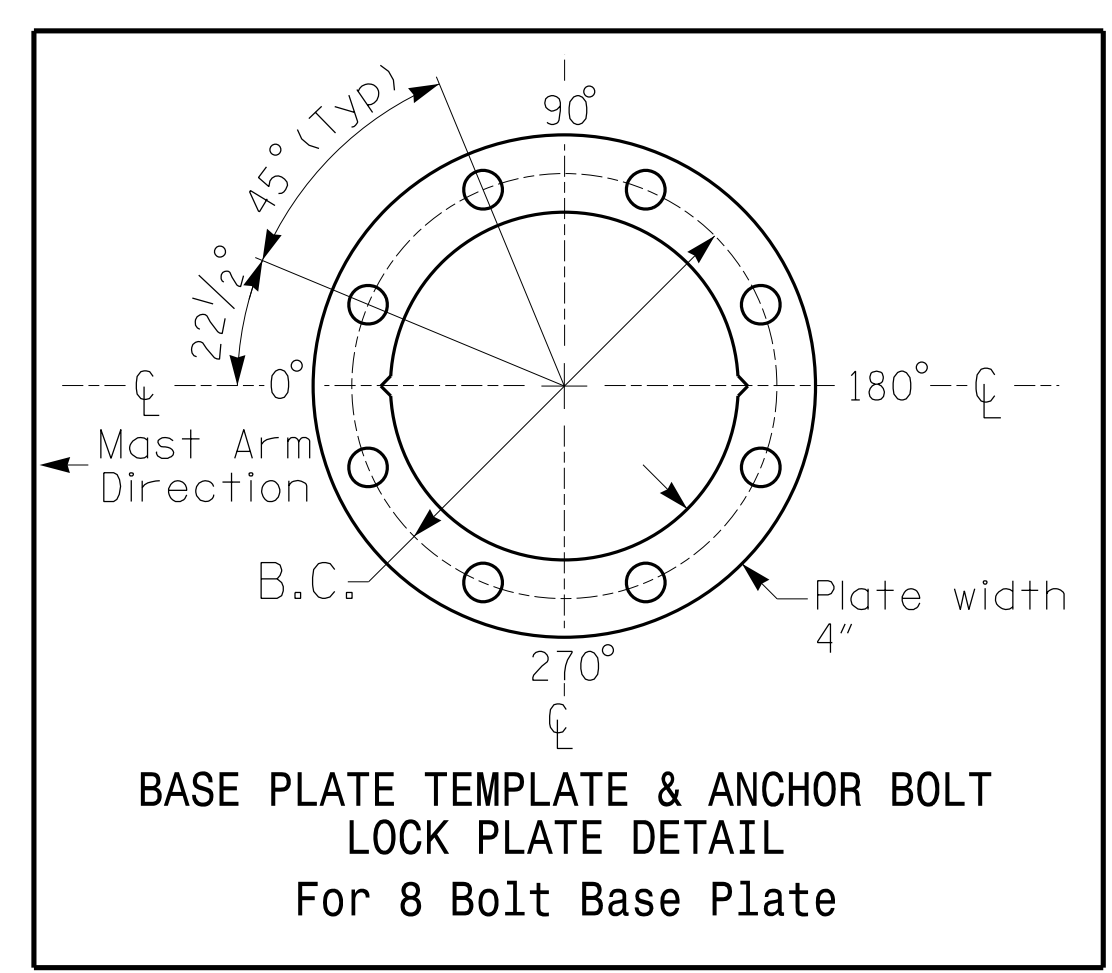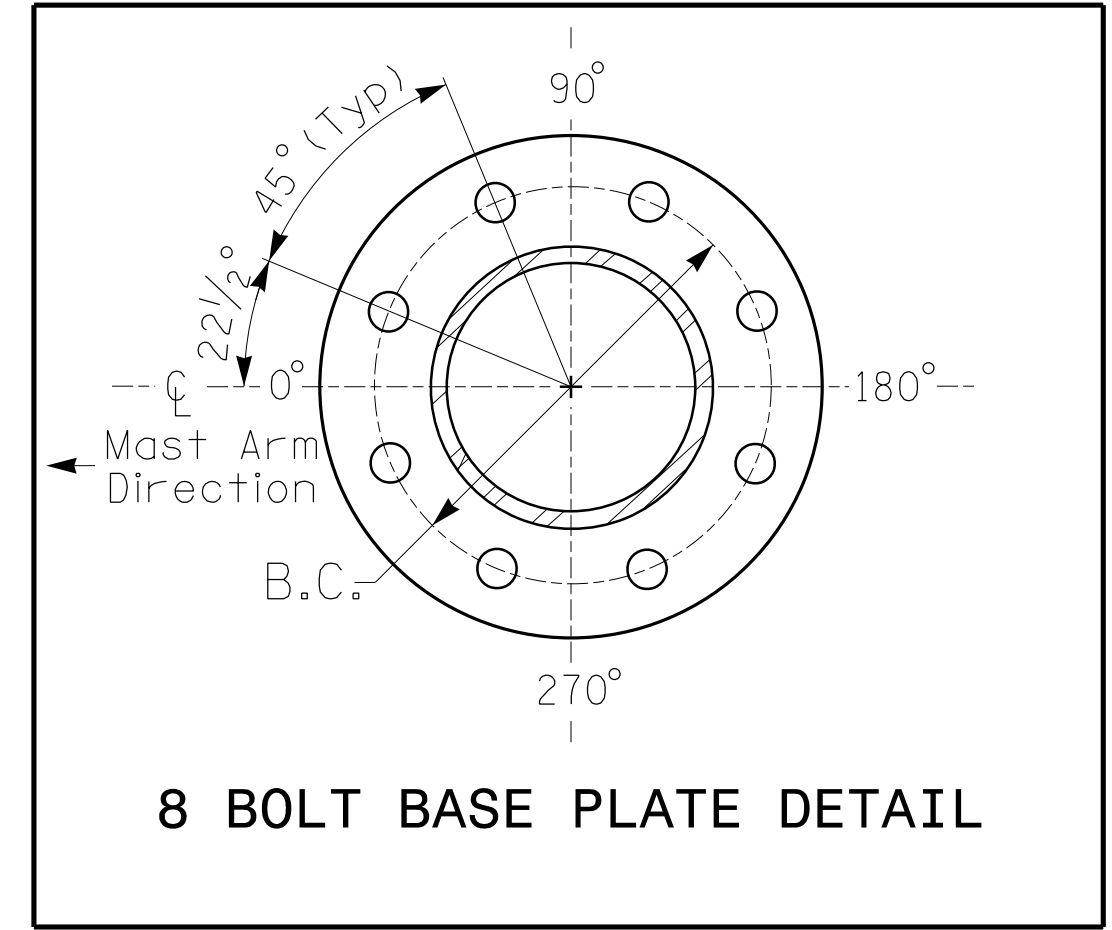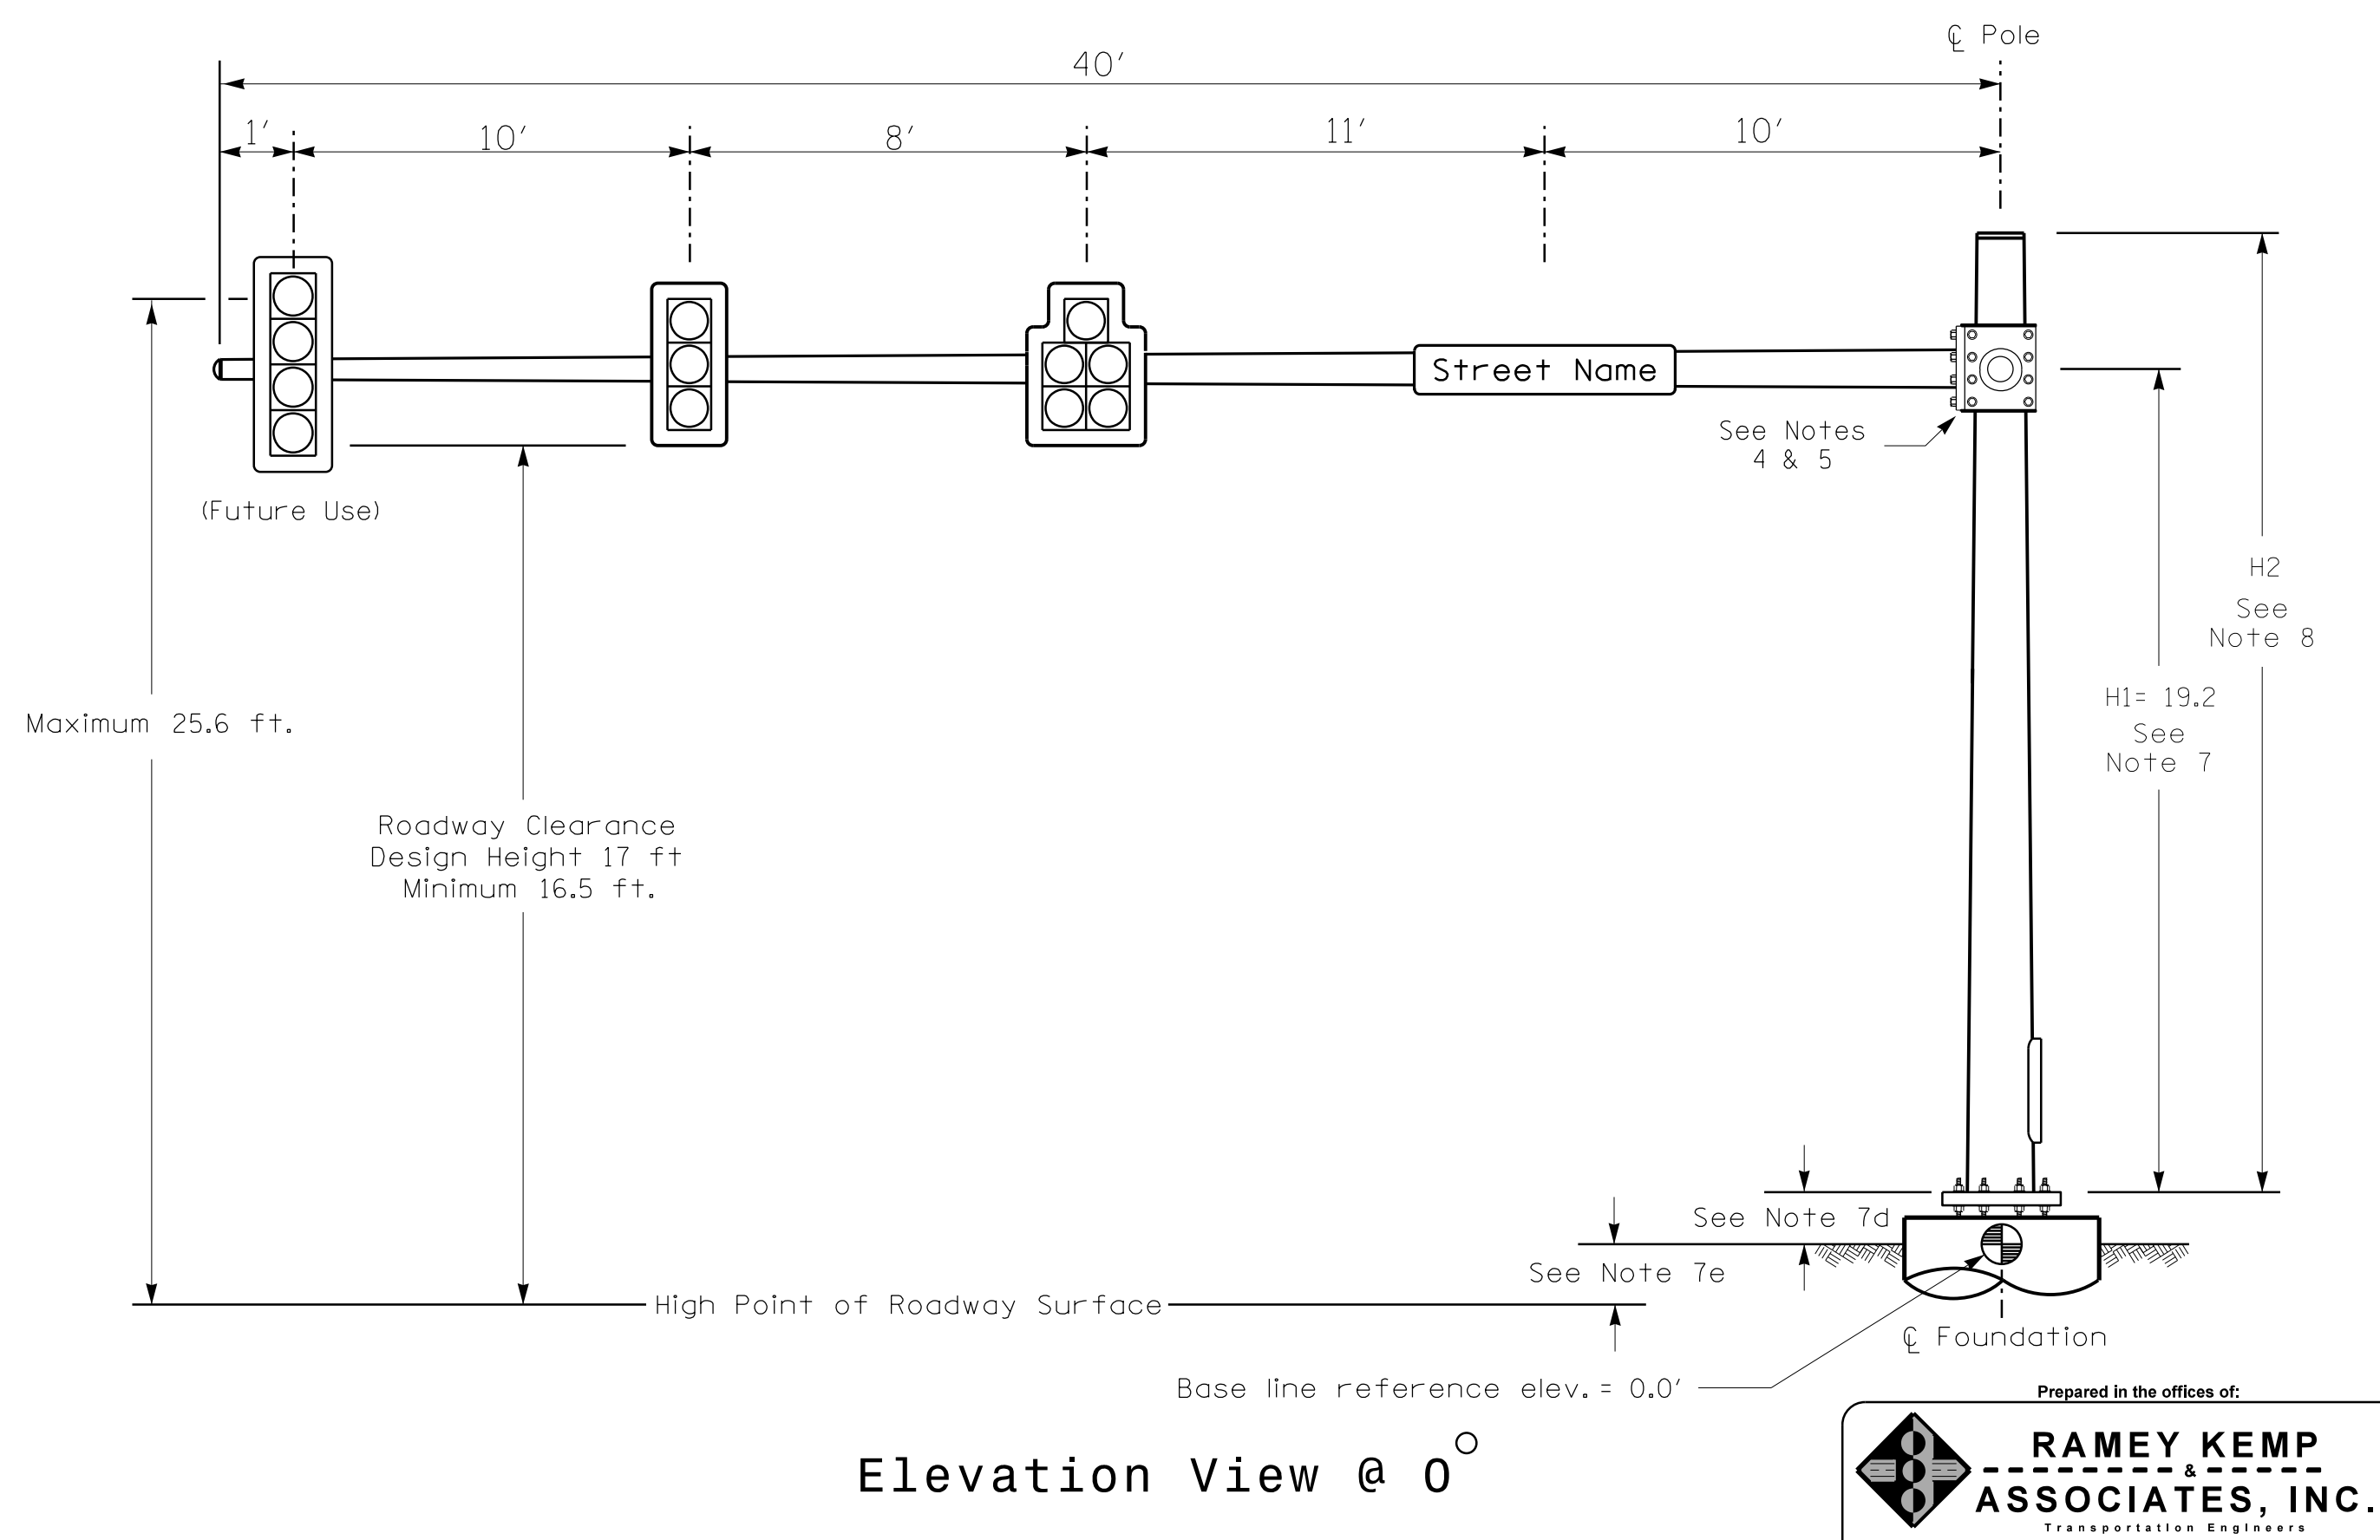

**MAST ARM LOADING SCHEDULE**

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
	STREET NAME SIGN RIGID MOUNTED	12.0 S.F.	18.0" W X 96.0" L	27 LBS


**DESIGN REFERENCE MATERIAL**

- Design the traffic signal structure and foundation in accordance with:
  - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
  - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
  - The 2018 NCDOT Roadway Standard Drawings.
  - The traffic signal project plans and special provisions.
  - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

**DESIGN REQUIREMENTS**


- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- The camber design for the mast arm deflection should provide an appearance of a low pitched arch where the tip or the free end of the mast arm does not deflect below horizontal when fully loaded.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements. This requires staggering the connections. Use elevation data for each arm to determine appropriate arm connection points.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
  - Mast arm slope and deflection are not considered in determining the arm attachment height as they are assumed to offset each other.
  - Signal heads are rigidly mounted and vertically centered on the mast arm.
  - The roadway clearance height for design is as shown in the elevation views.
  - The top of the pole base plate is 0.75 feet above the ground elevation.
  - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
  - Mast arm attachment height (H1) plus 2 feet, or
  - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

NCDOT Wind Zone 2 (130 mph)

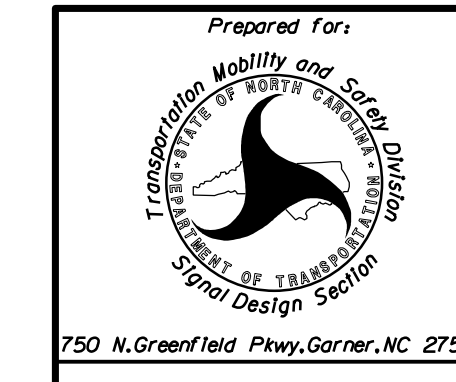

Prepared For:  
**US 13-NC 58/ NC 58-903**  
 at  
**US 13-NC 903/**  
**GSH Corporation Entrance**  
 Division 2 Greene County Snow Hill  
 PLAN DATE: June 2019 REVIEWED BY: WJ Hamilton  
 PREPARED BY: TS Popelka RKA PROJ. NO: 17346 (040)


DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

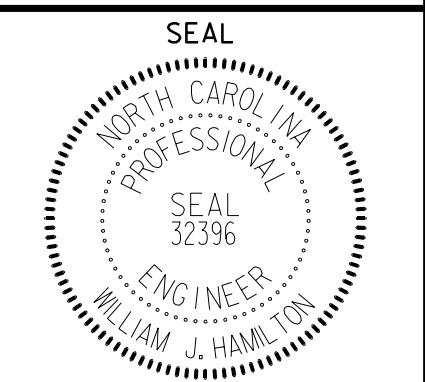

REVISIONS	INIT.	DATE


SIGNATURE: William J. Hamilton DATE: 6-11-19  
 SIG. INVENTORY NO. 02-0494

**Design Loading for METAL POLE NO. 2**

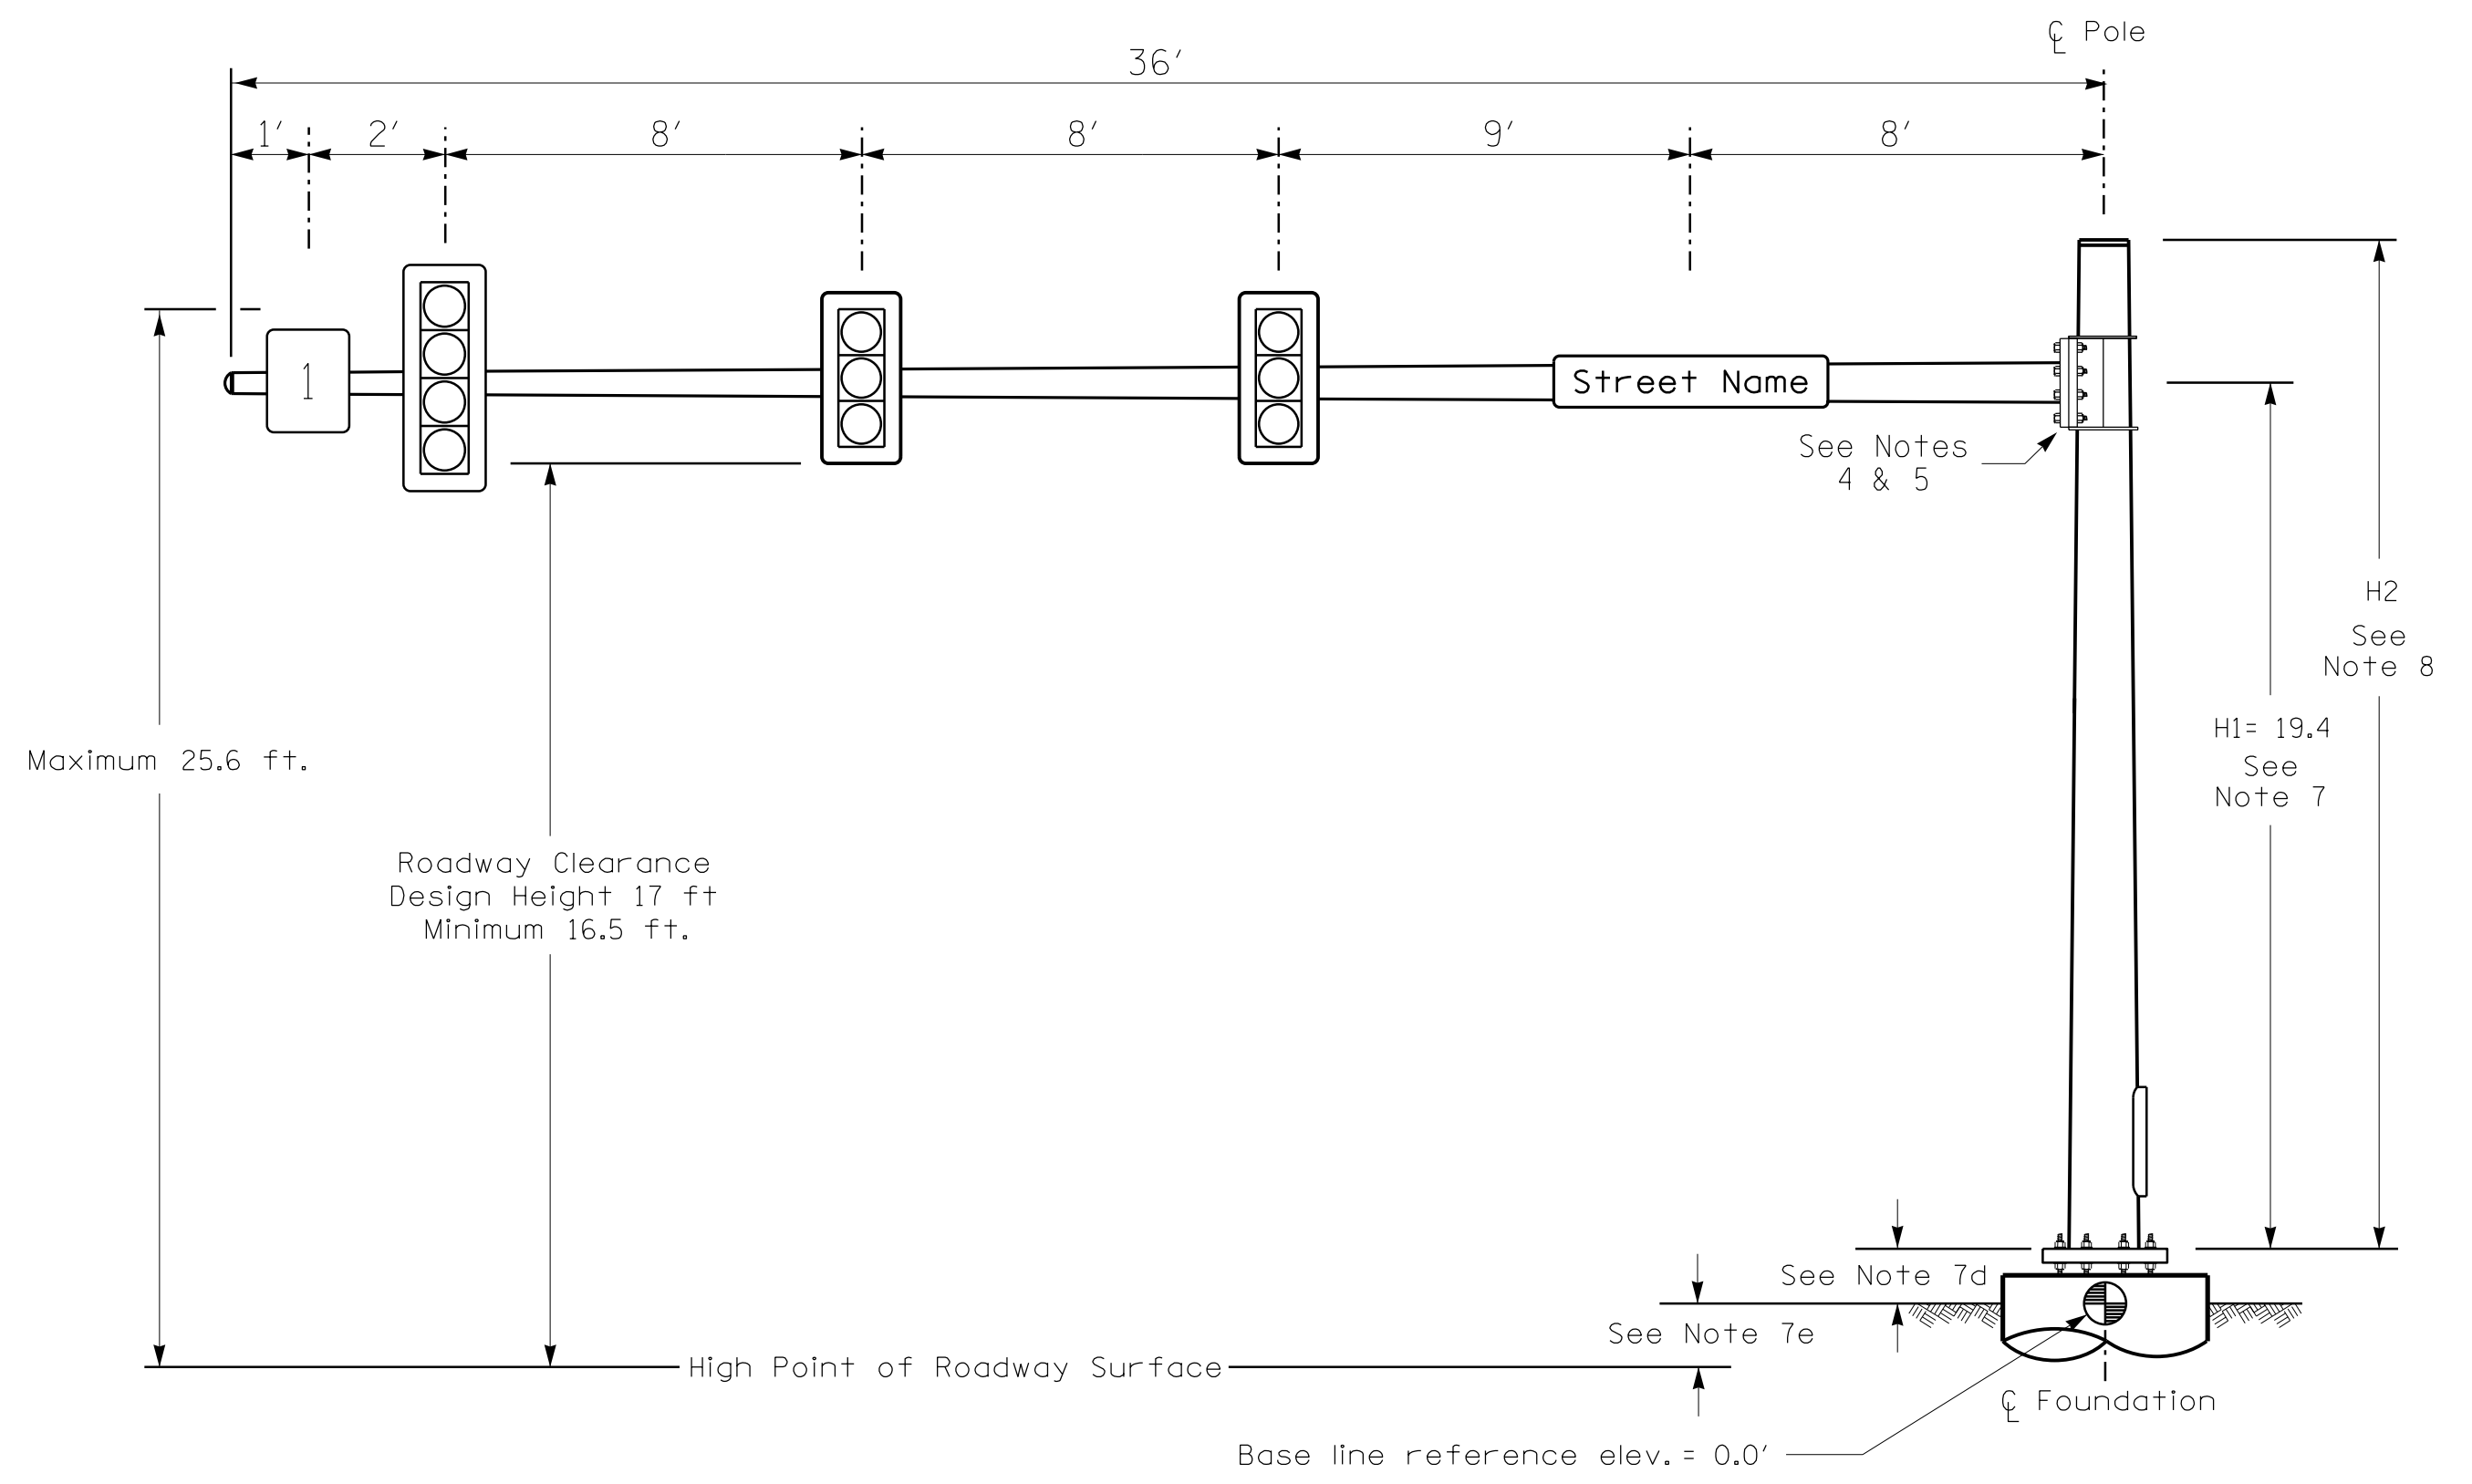

Elevation View

**Design Loading for METAL POLE NO. 3**

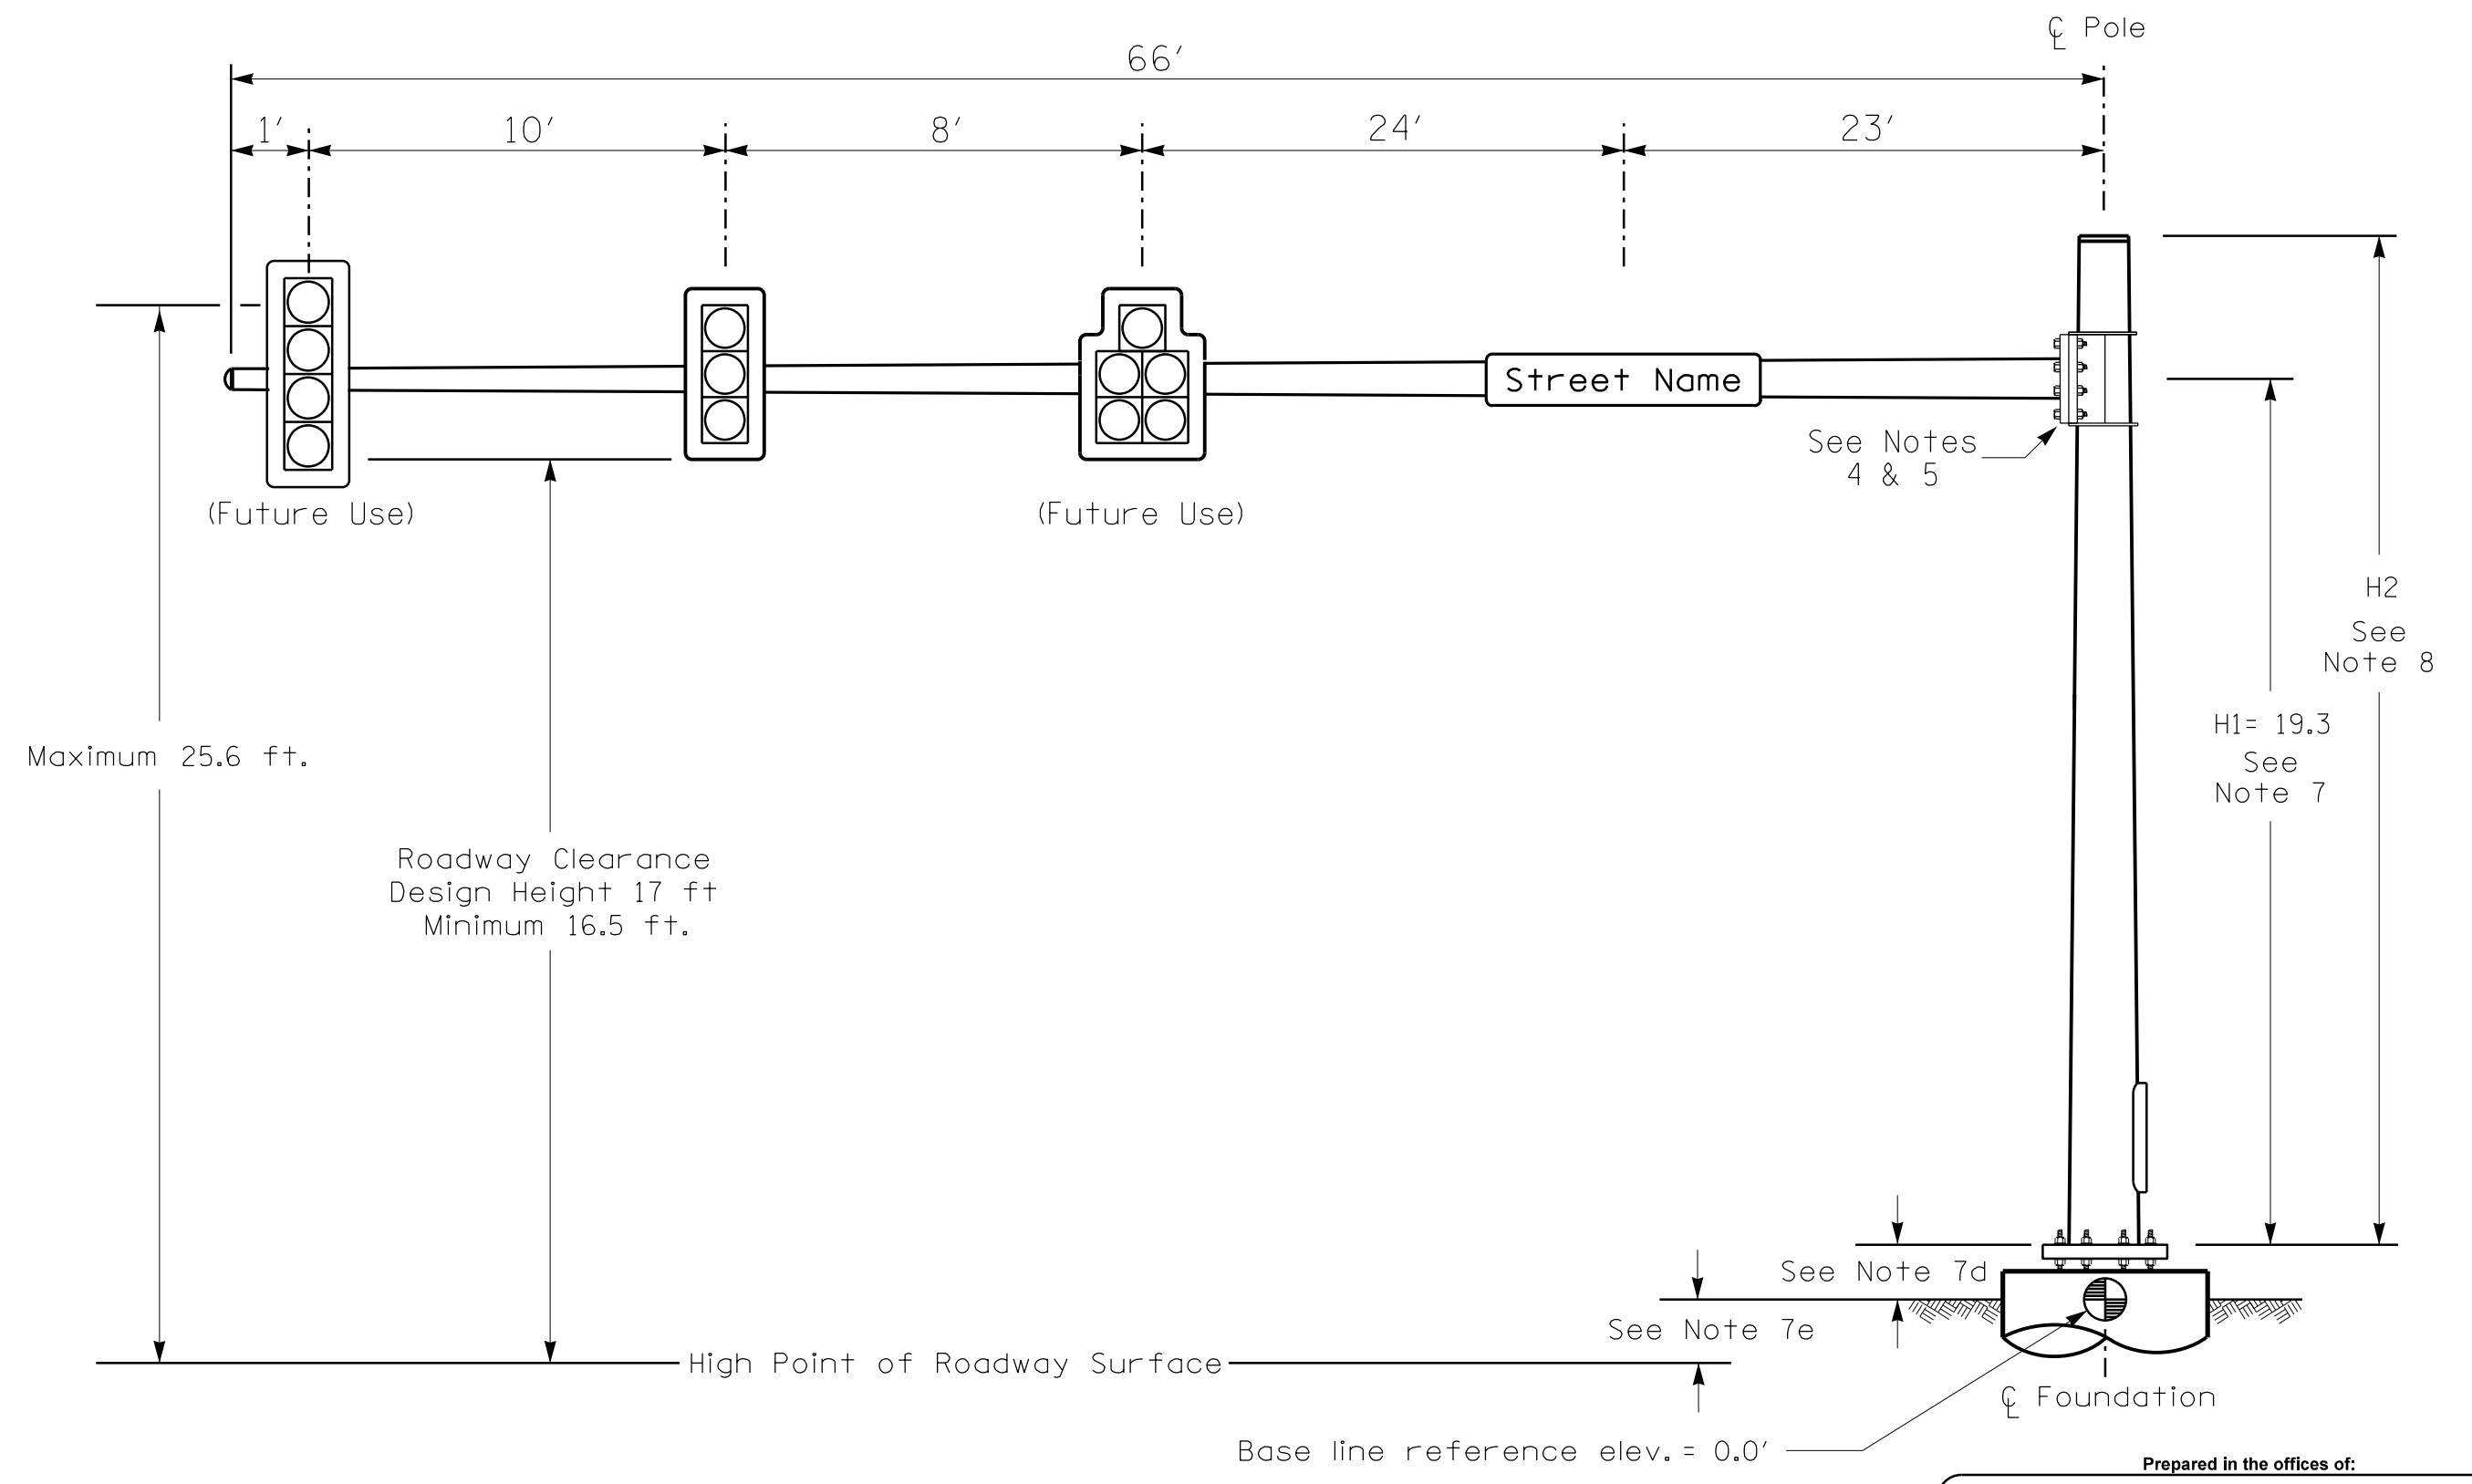


Elevation View

**SPECIAL NOTE**


The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

**Elevation Data for Mast Arm Attachment (H1)**


Elevation Differences for:	Pole 2	Pole 3
Baseline reference point at $\phi$ Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+0.4 ft.	+0.3 ft.
Elevation difference at Edge of travelway or face of curb	+0.2 ft.	+0.1 ft.

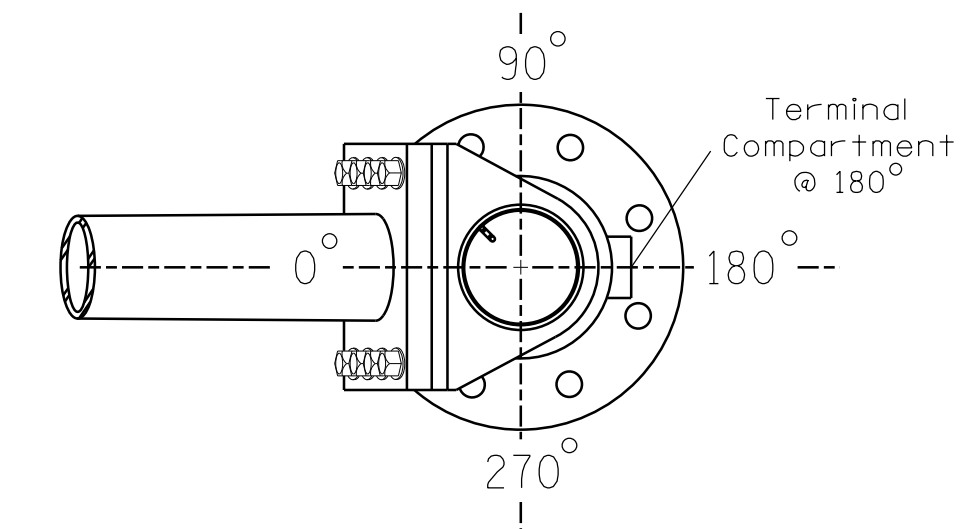

POLE RADIAL ORIENTATION

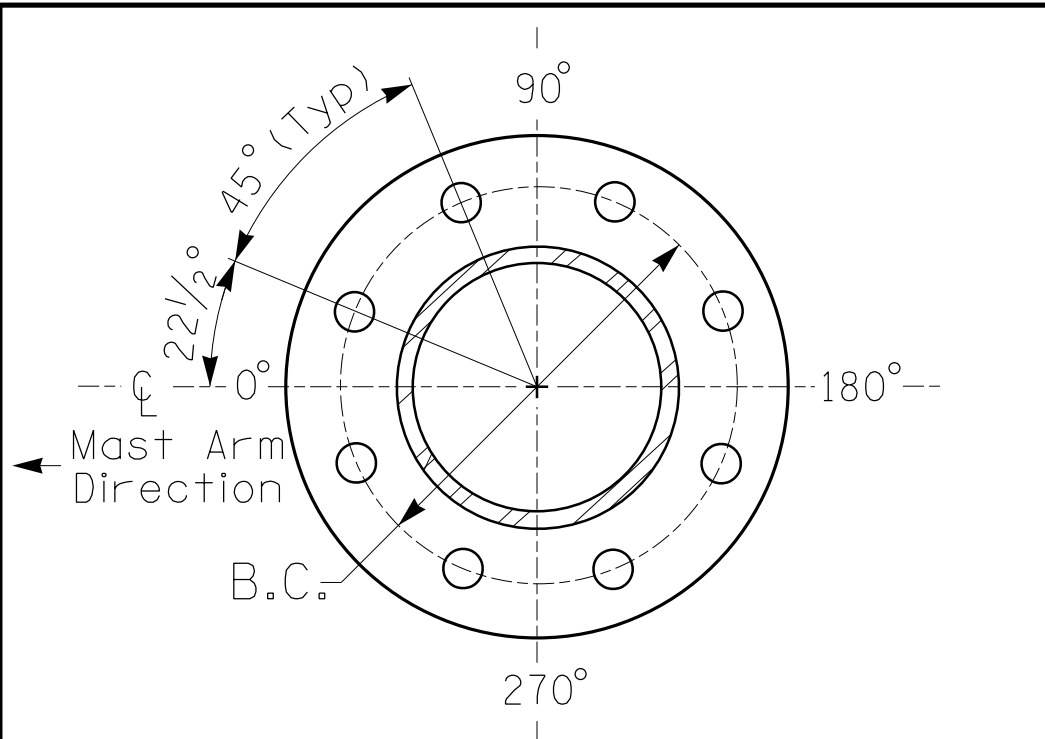

8 BOLT BASE PLATE DETAIL

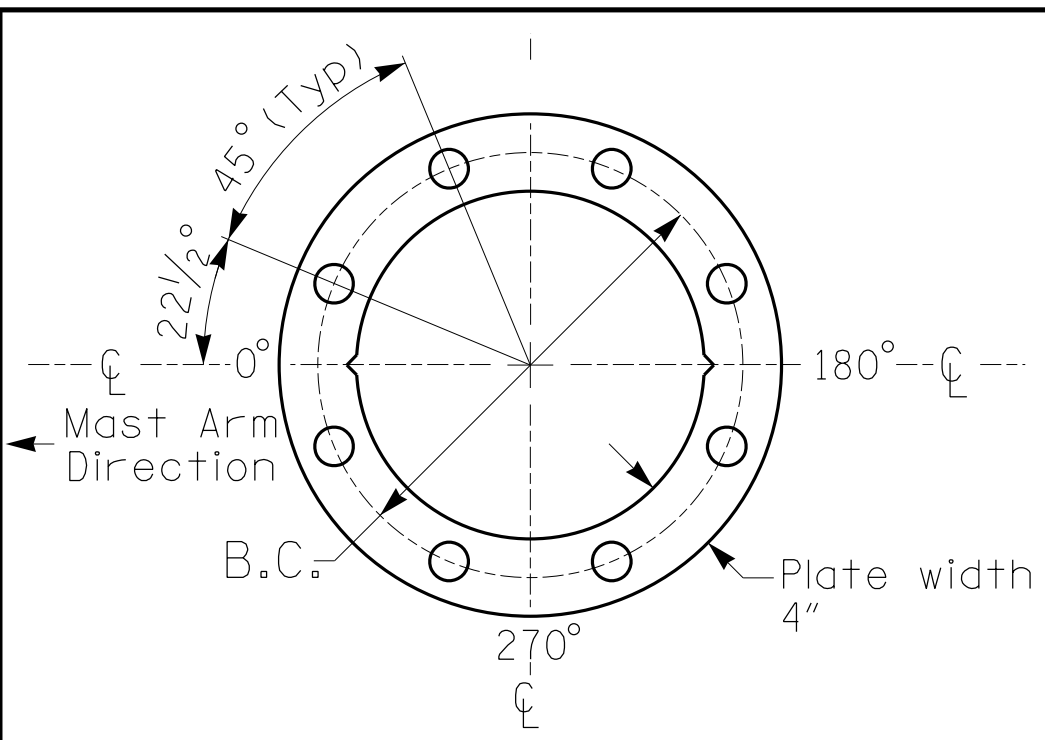

BASE PLATE TEMPLATE & ANCHOR BOLT LOCK PLATE DETAIL For 8 Bolt Base Plate

**MAST ARM LOADING SCHEDULE**

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
	SIGN RIGID MOUNTED	5.0 S.F.	24.0" W X 30.0" L	11 LBS
	STREET NAME SIGN RIGID MOUNTED	12.0 S.F.	18.0" W X 96.0" L	27 LBS

**NOTES**


**DESIGN REFERENCE MATERIAL**

- Design the traffic signal structure and foundation in accordance with:
  - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
  - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
  - The 2018 NCDOT Roadway Standard Drawings.
  - The traffic signal project plans and special provisions.
  - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

**DESIGN REQUIREMENTS**


- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- The camber design for the mast arm deflection should provide an appearance of a low pitched arch where the tip or the free end of the mast arm does not deflect below horizontal when fully loaded.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements. This requires staggering the connections. Use elevation data for each arm to determine appropriate arm connection points.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
  - Mast arm slope and deflection are not considered in determining the arm attachment height as they are assumed to offset each other.
  - Signal heads are rigidly mounted and vertically centered on the mast arm.
  - The roadway clearance height for design is as shown in the elevation views.
  - The top of the pole base plate is 0.75 feet above the ground elevation.
  - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
  - Mast arm attachment height (H1) plus 2 feet, or
  - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

NCDOT Wind Zone 2 (130 mph)

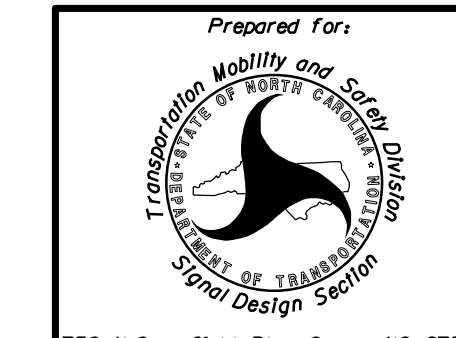


US 13-NC 58/ NC 58-903  
at  
US 13-NC 903/  
GSH Corporation Entrance  
Division 2 Greene County Snow Hill  
PLAN DATE: June 2019 REVIEWED BY: WJ Hamilton  
PREPARED BY: TS Popelka RKA PROJ. NO: 17346 (040)

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

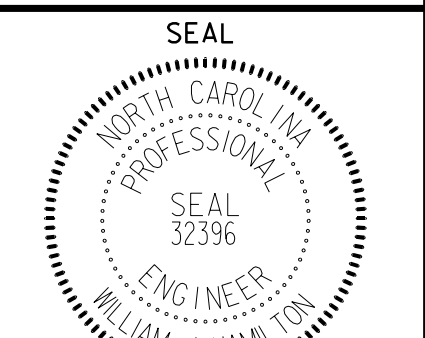

William J. Hamilton 6-11-19  
SIGNATURE DATE  
SIG. INVENTORY NO. 02-0494

**PHASING DIAGRAM**

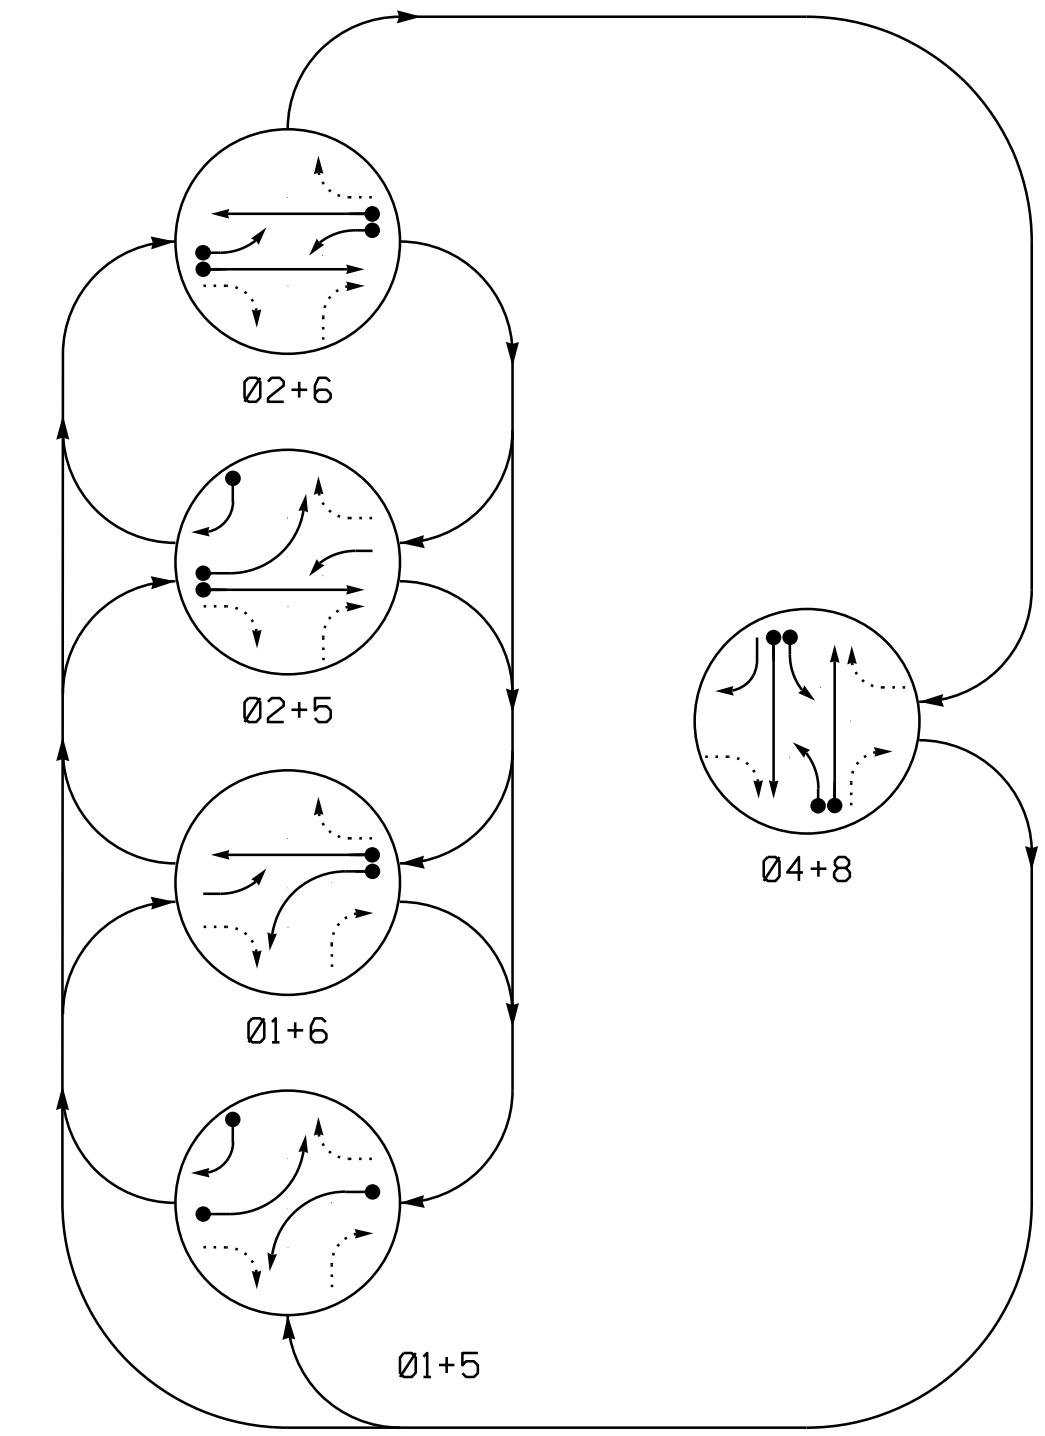


**PHASING DIAGRAM DETECTION LEGEND**

- ←●→ DETECTED MOVEMENT
- ←○→ UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- ←- - -> PEDESTRIAN MOVEMENT

SIGNAL FACE	PHASE					FLASH
	Ø1+5	Ø1+6	Ø2+5	Ø2+6	Ø4+8	
11	←	←	←	←	←	Y
21,22	R	R	G	G	R	Y
41	←	←	←	←	←	Y
42,44	R	R	R	R	G	R
43	←	←	←	←	←	R
51	←	←	←	←	←	Y
61,62	R	G	R	G	R	Y
81	←	←	←	←	←	Y
82,83,84	R	R	R	R	G	R


**SIGNAL FACE I.D.**

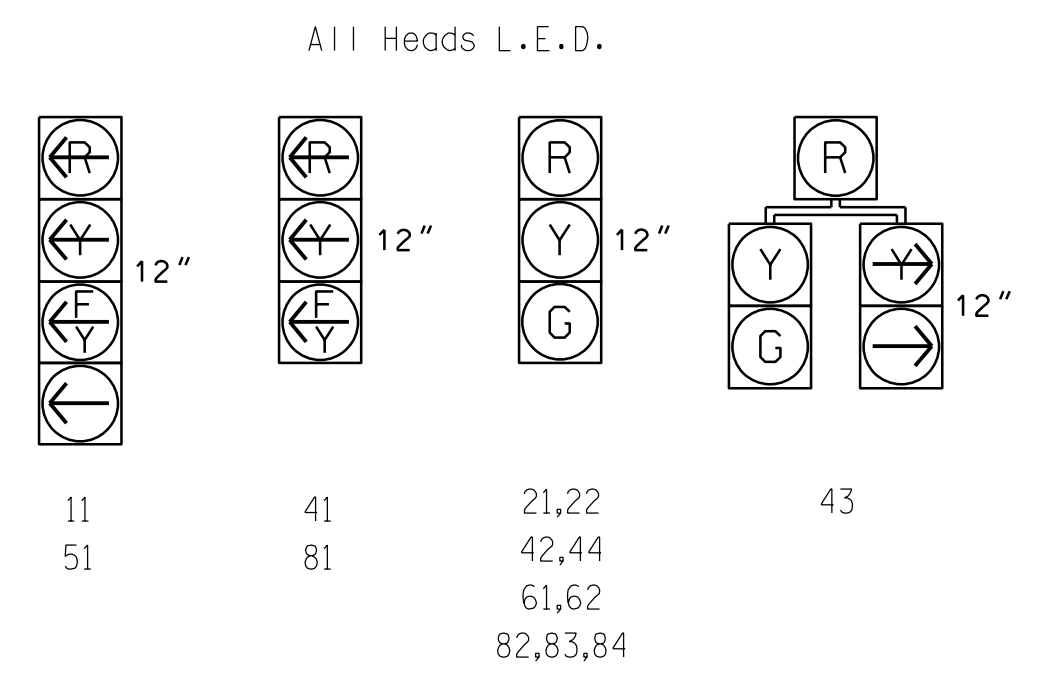

**5 Phase Fully Actuated Isolated**

**NOTES**


1. Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
2. Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
3. Phase 1 and/or phase 5 may be lagged.
4. Set all detector units to presence mode.
5. Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
6. Pavement markings are existing.

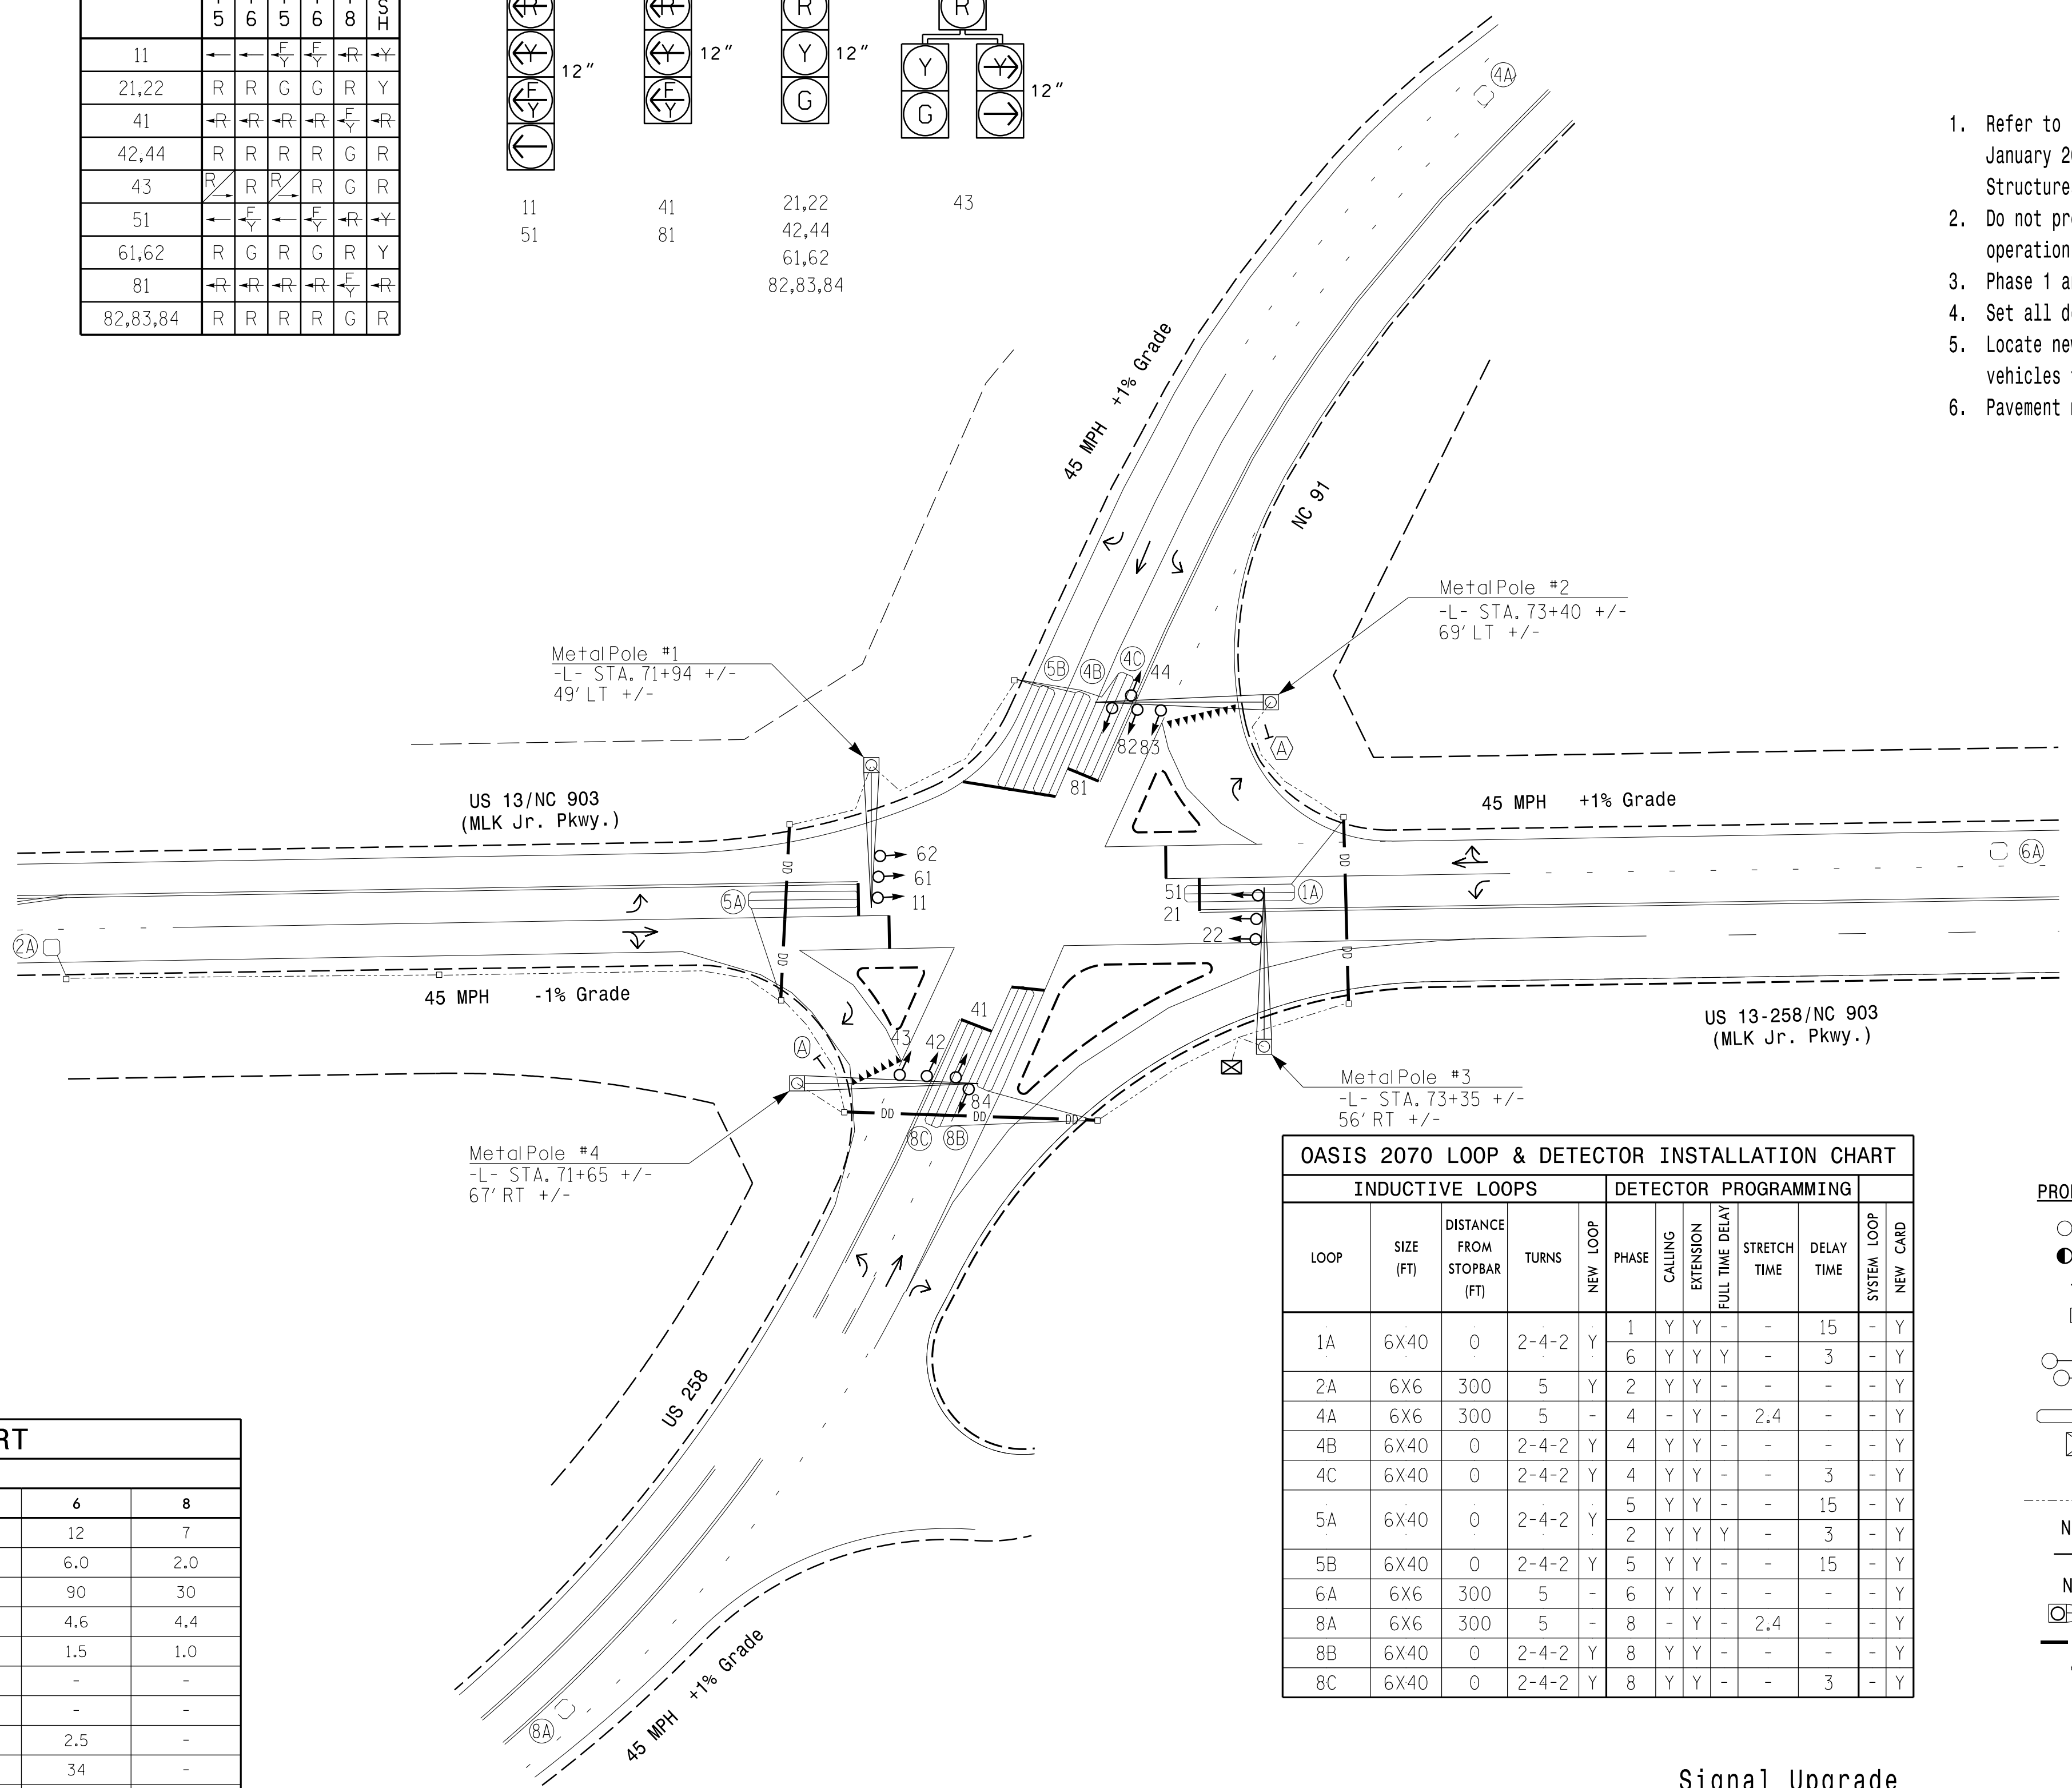

FEATURE	PHASE					
	1	2	4	5	6	8
Min Green 1*	7	12	7	7	12	7
Extension 1*	2.0	6.0	2.0	.0	6.0	2.0
Max Green 1*	20	90	30	20	90	30
Yellow Clearance	3.0	4.6	4.4	3.0	4.6	4.4
Red Clearance	2.9	1.5	1.0	2.9	1.5	1.0
Walk 1*	-	-	-	-	-	-
Don't Walk 1	-	-	-	-	-	-
Seconds Per Actuation*	-	2.5	-	-	2.5	-
Max Variable Initial*	-	34	-	-	34	-
Time Before Reduction*	-	15	-	-	15	-
Time To Reduce*	-	30	-	-	30	-
Minimum Gap	-	3.0	-	-	3.0	-
Recall Mode	-	MIN RECALL	-	-	MIN RECALL	-
Vehicle Call Memory	-	YELLOW	-	-	YELLOW	-
Dual Entry	-	-	ON	-	-	ON
Simultaneous Gap	ON	ON	ON	ON	ON	ON

\* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART												
INDUCTIVE LOOPS				DETECTOR PROGRAMMING								
LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME	SYSTEM LOOP	NEW CARD
1A	6X40	0	2-4-2	Y	1	Y	Y	-	-	15	-	Y
2A	6X6	300	5	Y	2	Y	Y	-	-	3	-	Y
4A	6X6	300	5	-	4	-	Y	-	2.4	-	-	Y
4B	6X40	0	2-4-2	Y	4	Y	Y	-	-	-	-	Y
4C	6X40	0	2-4-2	Y	4	Y	Y	-	-	3	-	Y
5A	6X40	0	2-4-2	Y	5	Y	Y	-	-	15	-	Y
5B	6X40	0	2-4-2	Y	5	Y	Y	-	-	15	-	Y
6A	6X6	300	5	-	6	Y	Y	-	-	-	-	Y
8A	6X6	300	5	-	8	-	Y	-	2.4	-	-	Y
8B	6X40	0	2-4-2	Y	8	Y	Y	-	-	-	-	Y
8C	6X40	0	2-4-2	Y	8	Y	Y	-	-	3	-	Y

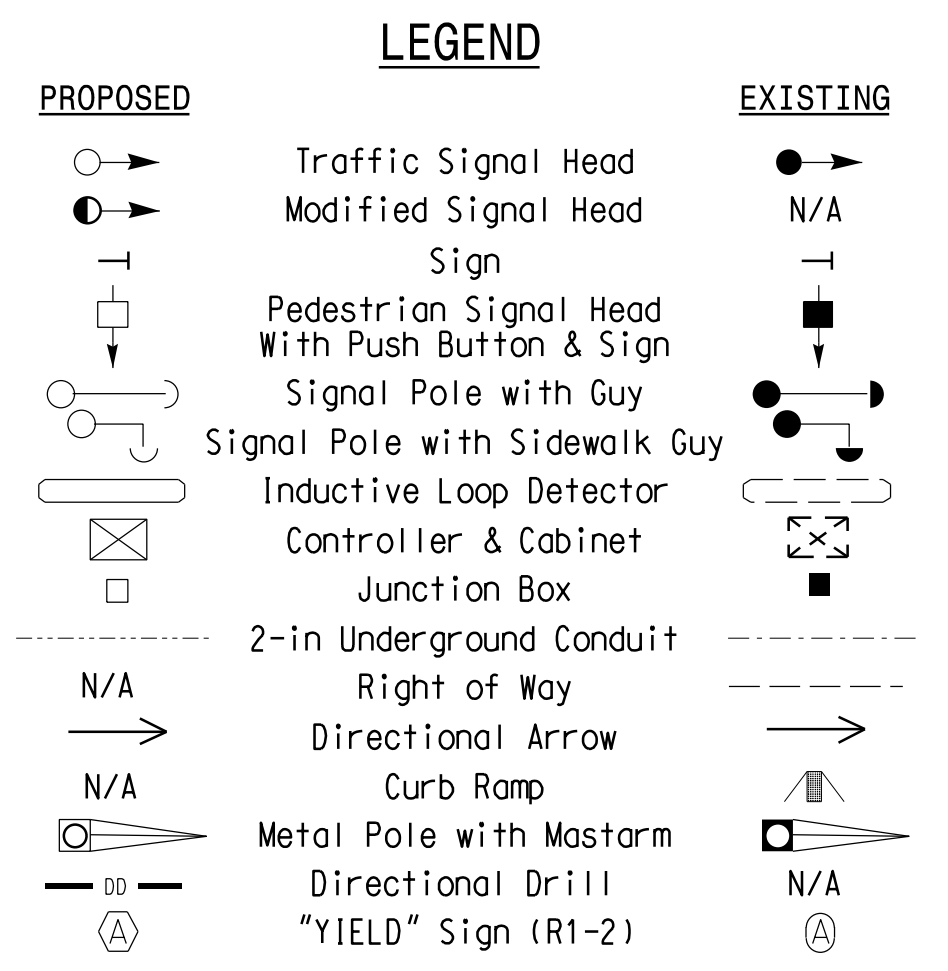

**Signal Upgrade**

Prepared in the offices of:

**RAMEY KEMP ASSOCIATES, INC.**  
 Transportation Engineers  
 5808 Parkington Place, Suite 100  
 Raleigh, North Carolina 27609  
 919-872-9115 Tel. 919-876-6116 Fax  
 www.rameykemp.com

Prepared For:  
  
 STATE OF NORTH CAROLINA  
 Signal Design Section

750 N. Greenfield Pkwy, Garner, NC 27529

SCALE: 0 40  
1" = 40'

**US 13-258/NC 903 (MLK Jr. Pkwy.) at US 258/NC 91**  
 Division 2 Greene County Snow Hill

PLAN DATE: June 2019 REVIEWED BY: WJ Hamilton  
 PREPARED BY: TS Popelka RKA PROJ. NO: 17346 (040)

REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL  
  
 William J. Hamilton  
 SIGNATURE DATE: 6-11-19  
 SIG. INVENTORY NO. 02-0336




### EDI MODEL 2018ECL-NC CONFLICT MONITOR

#### PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

REMOVE DIODE JUMPERS 1-5, 1-6, 1-9, 1-11, 2-5, 2-6, 2-9, 2-11, 4-8, 4-10, 4-12, 5-9, 5-11, 6-9, 6-11, 8-10, 8-12, 9-11 and 10-12.

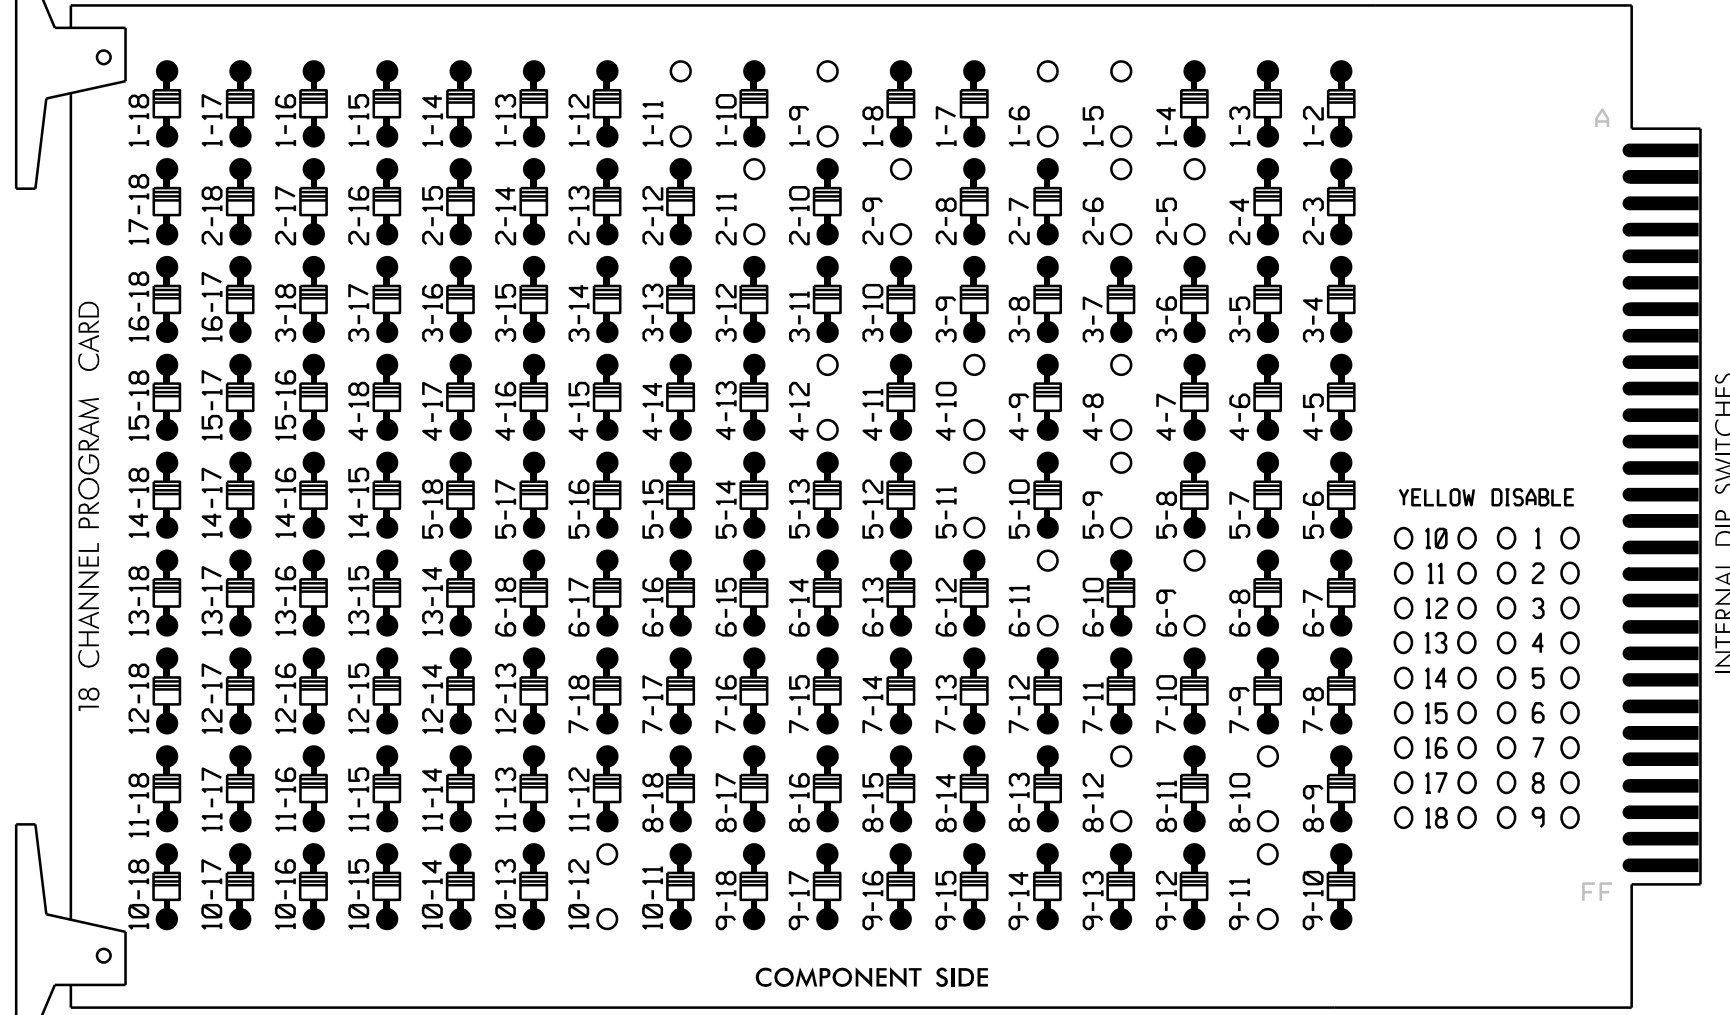

REMOVE JUMPERS AS SHOWN

**NOTES:**

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

■ = DENOTES POSITION OF SWITCH

#### NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Enable Simultaneous Gap-Out for all Phases.
- Program phases 2 and 6 for Variable Initial and Gap Reduction.
- Program phases 2 and 6 for Startup In Green.
- Program phases 2 and 6 for Yellow Flash and overlaps 1 and 2 as Wag Overlaps.

#### SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	21,22	NU	NU	42, 43,44	NU	43	51	61,62	NU	82, 83,84	NU	11	81	NU	51	41	NU
RED		128			101		*		134		107							
YELLOW	*	129			102				135		108							
GREEN		130			103				136		109							
RED ARROW													A121	A124		A114	A101	
YELLOW ARROW							132						A122	A125		A115	A102	
FLASHING YELLOW ARROW													A123	A126		A116	A103	
GREEN ARROW	127						133	133										

NU = Not Used

\* Denotes install load resistor. See load resistor installation detail this sheet.

★ See pictorial of head wiring in detail this sheet.

#### EQUIPMENT INFORMATION

CONTROLLER.....2070  
 CABINET.....332 /W/ AUX  
 SOFTWARE.....ECONOLITE OASIS  
 CABINET MOUNT.....BASE  
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE  
 LOAD SWITCHES USED.....S1,S2,S5,S7,S8,S11,AUX S1,  
 AUX S2,AUX S4,AUX S5  
 PHASES USED.....1,2,4,5,6,8  
 OVERLAP "A".....1+2  
 OVERLAP "B".....4  
 OVERLAP "C".....5+6  
 OVERLAP "D".....8

#### INPUT FILE POSITION LAYOUT

(front view)

FILE "I"	1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	∅ 1	∅ 2	-OFS	-OFS	-OFS	∅ 4	∅ 4	-OFS	-OFS	-OFS	-OFS	-OFS	-OFS	FS
L	1A	2A				4A	4C							DC ISOLATOR
	NOT USED	NOT USED				4B	NOT USED							ST
														DC ISOLATOR
U	∅ 5	∅ 5	∅ 6	-OFS	-OFS	∅ 8	∅ 8	-OFS	-OFS	-OFS	-OFS	-OFS	-OFS	-OFS
L	5A	5B	6A			8A	8C							
	NOT USED	NOT USED	NOT USED			8B	NOT USED							

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE  
 ST = STOP TIME


⊗ Wired Input - Do not populate slot with detector card

#### INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A <sup>1</sup>	TB2-1,2	I1U	56	18	1	1	Y	Y			15
	-	J4U	48	10	26	6	Y	Y	Y		3
2A	TB2-5,6	I2U	39	1	2	2	Y	Y			
4A	TB4-9,10	I6U	41	3	4	4		Y		3.1	
4B	TB4-11,12	I6L	45	7	14	4	Y	Y			
4C	TB6-1,2	I7U	65	27	34	4	Y	Y			3
5A <sup>2</sup>	TB3-1,2	J1U	55	17	5	5	Y	Y			15
	-	I4U	47	9	22	2	Y	Y	Y		3
5B	TB3-5,6	J2U	40	2	6	5	Y	Y			15
6A	TB3-9,10	J3U	64	26	36	6	Y	Y			
8A	TB5-9,10	J6U	42	4	8	8	Y	Y		3.1	
8B	TB5-11,12	J6L	46	8	18	8	Y	Y			
8C	TB7-1,2	J7U	66	28	38	8	Y	Y			3

- Add jumper from I1-W to J4-W, on rear of input file.
- Add jumper from J1-W to I4-W, on rear of input file.


#### INPUT FILE POSITION LEGEND: J2L

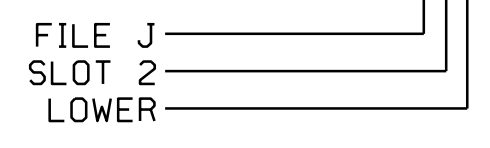

#### LOAD RESISTOR INSTALLATION DETAIL


(install resistors as shown below)

VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

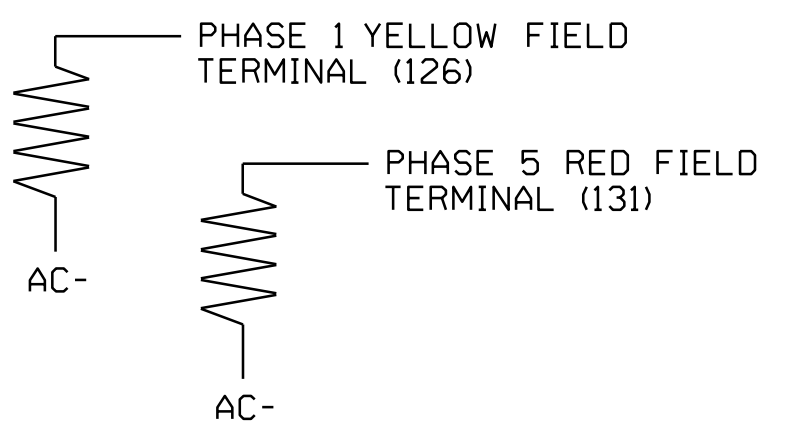

#### FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

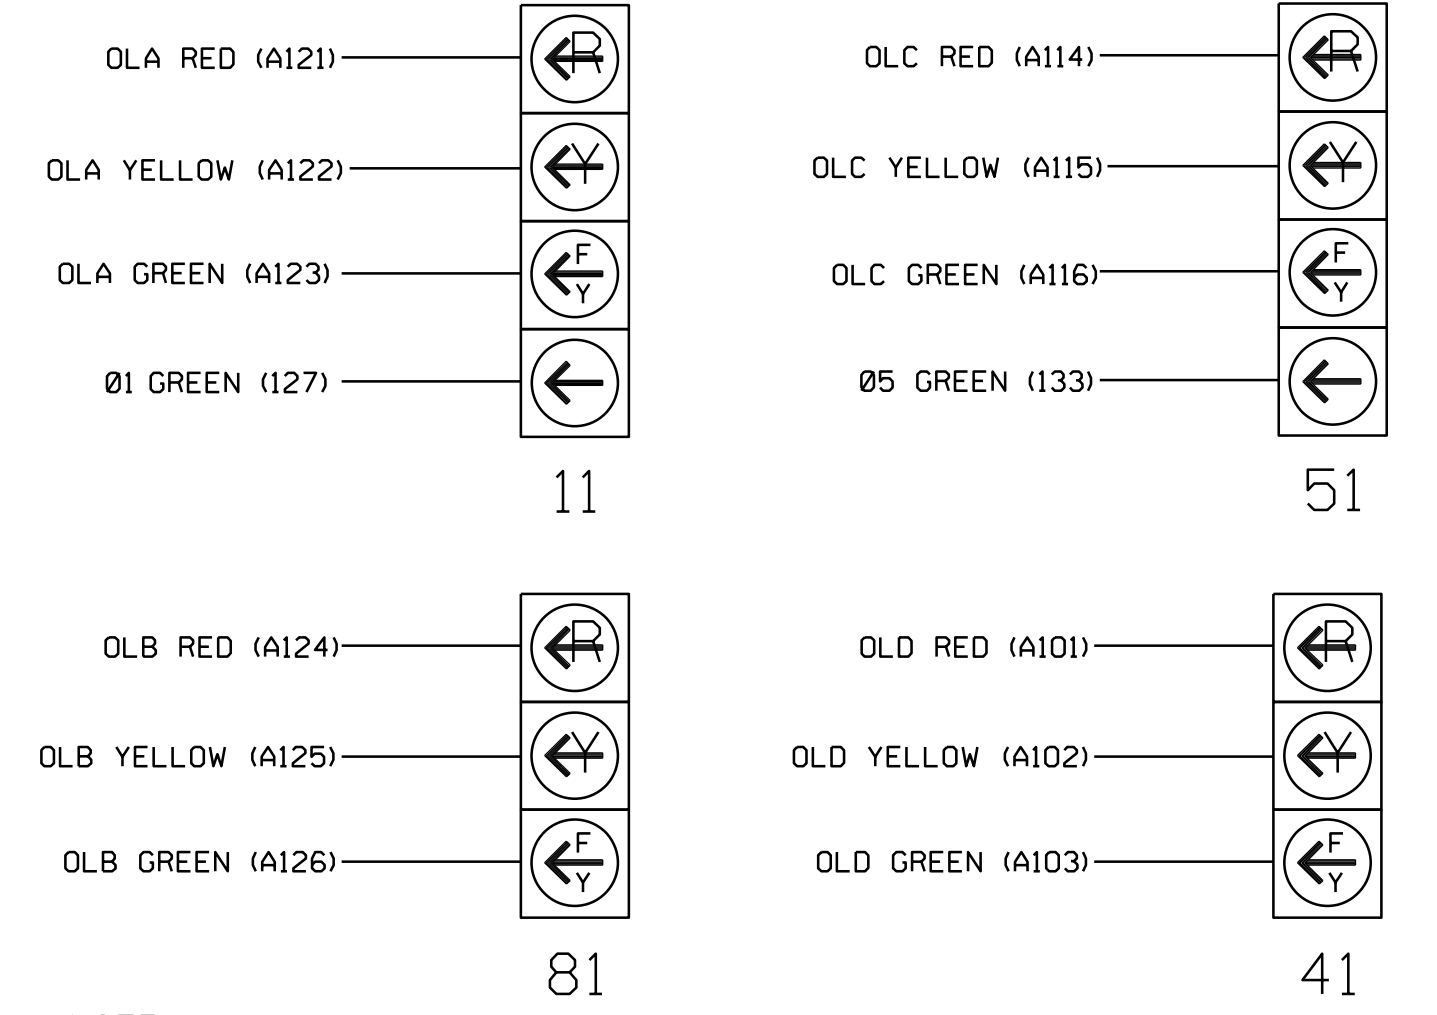

**NOTE**

- The sequence display for signal heads 11 and 51 requires special programming. See sheet 2 of 2 for programming instructions.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 02-0336  
 DESIGNED: Jun 2019  
 SEALED: 6-11-19  
 REVISED: N/A


#### Electrical Detail Sheet 1 of 2

	US 13-258/NC 903 (MLK Jr. Pkwy.) at US 258/NC 91 Division 2 Greene County Snow Hill		
	PLAN DATE: June 2019 PREPARED BY: TS Popelka	REVIEWED BY: WJ Hamilton RKA PROJ. NO: 17346 (040)	


### LOGICAL I/O PROCESSOR PROGRAMMING DETAIL TO PRODUCE SPECIAL FYA-PPLT SIGNAL SEQUENCE

(program controller as shown below)


- FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2, 3, 4, 5 AND 6.
- FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).

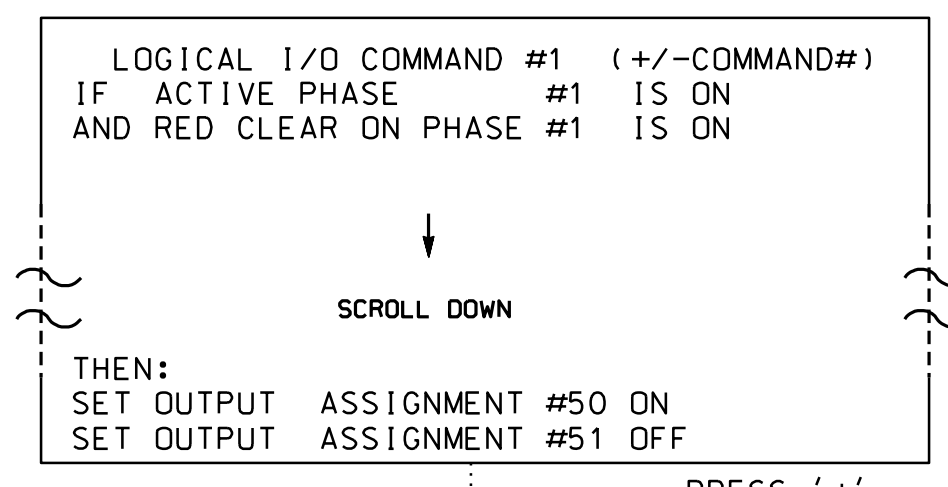


NOTE: LOGIC FOR PHASE 1 RED CLEAR WHEN TRANSITIONING FROM PHASE 1 TO PHASE 2 (HEAD 11).

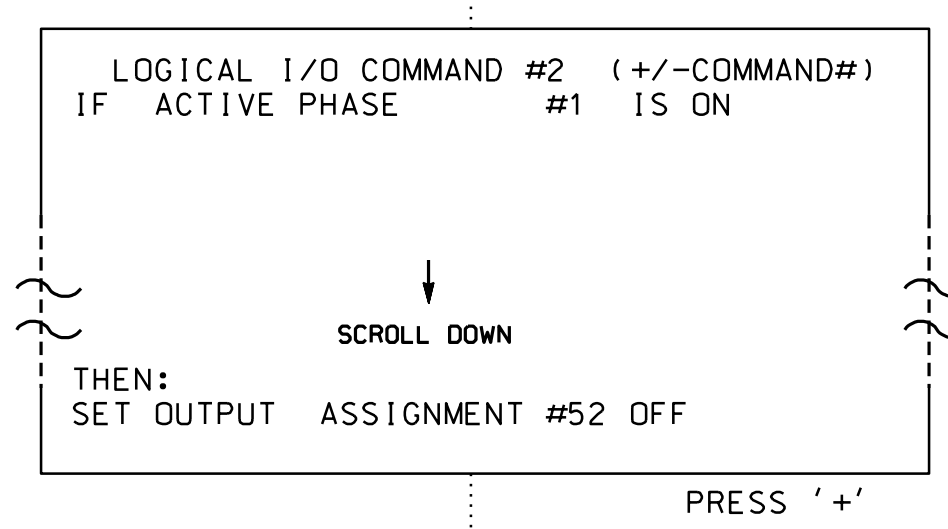


NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 1 (HEAD 11).

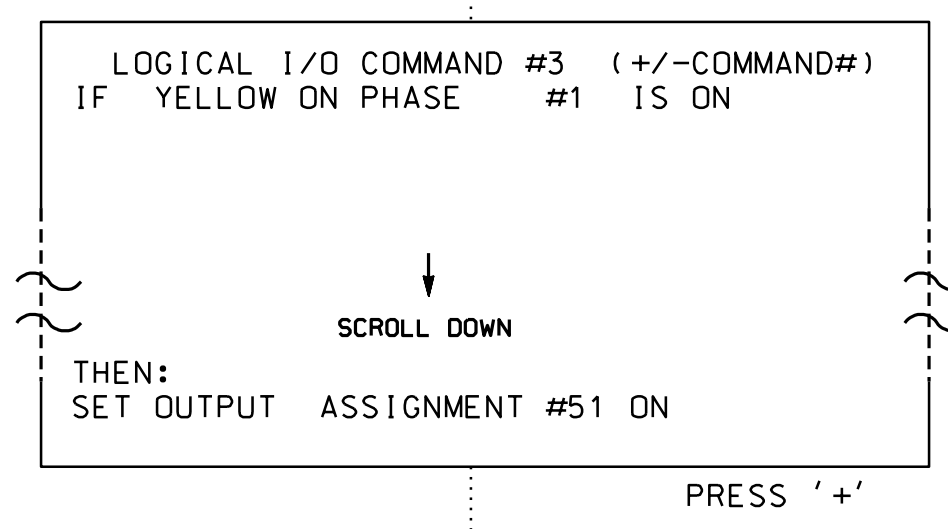


NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 1 (HEAD 11).

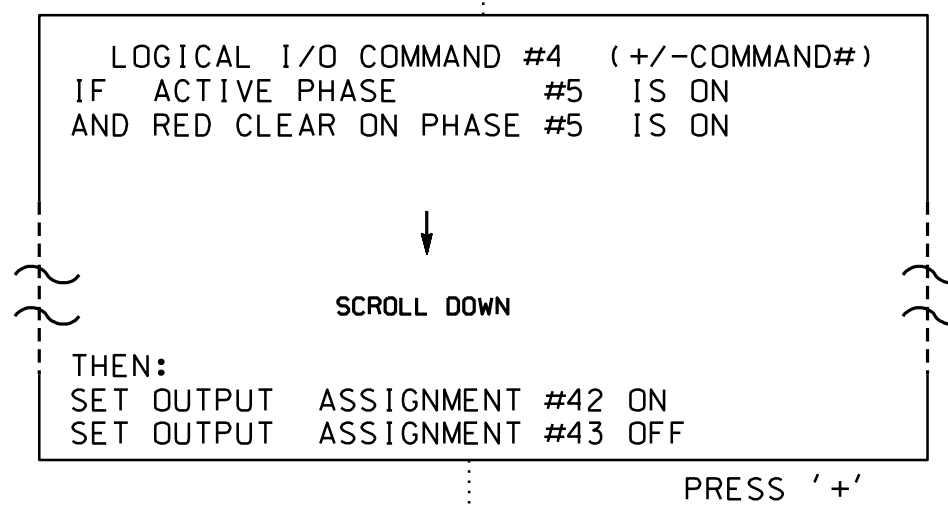

NOTE: LOGIC FOR PHASE 5 RED CLEAR WHEN TRANSITIONING FROM PHASE 5 TO PHASE 6 (HEAD 51).

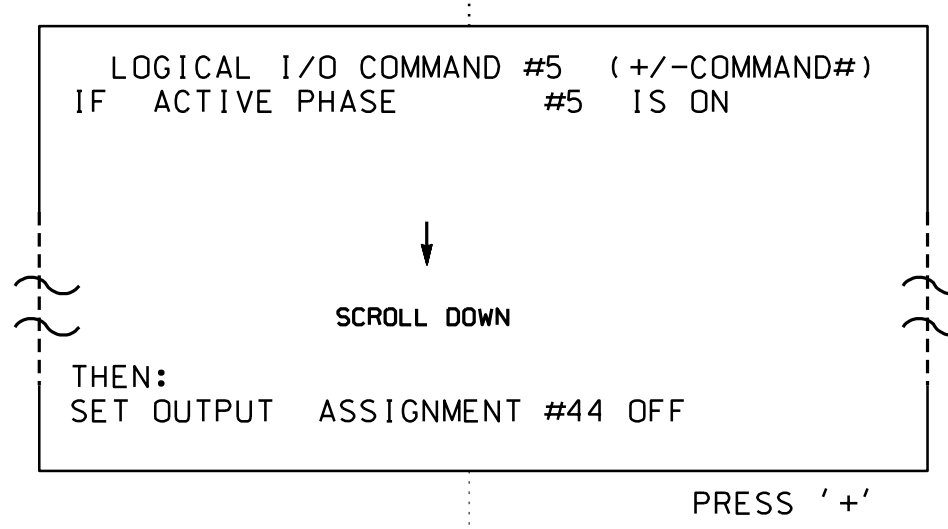

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 5 (HEAD 51).

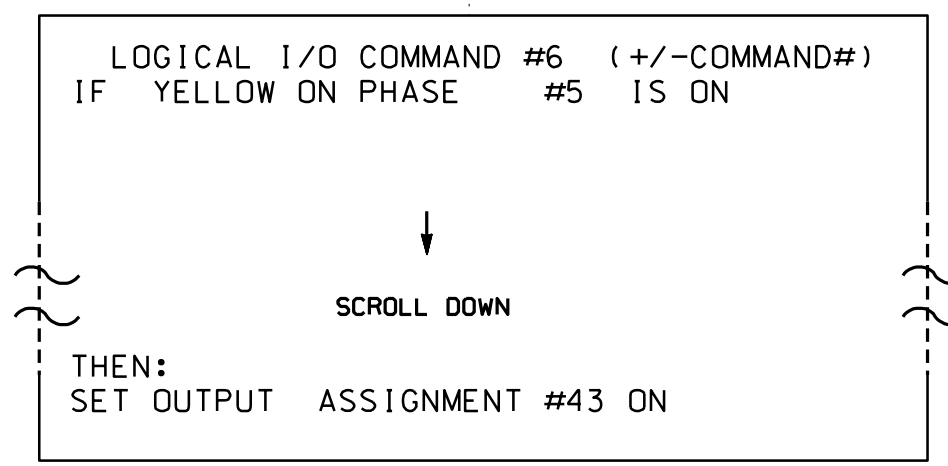

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 5 (HEAD 51).

LOGIC I/O PROCESSOR PROGRAMMING COMPLETE

**OUTPUT REFERENCE SCHEDULE**


OUTPUT 42	=	Overlap C Red
OUTPUT 43	=	Overlap C Yellow
OUTPUT 44	=	Overlap C Green
OUTPUT 50	=	Overlap A Red
OUTPUT 51	=	Overlap A Yellow
OUTPUT 52	=	Overlap A Green

THIS ELECTRICAL DETAIL IS FOR  
THE SIGNAL DESIGN: 02-0336  
DESIGNED: Jun 2019  
SEALED: 6-11-19  
REVISED: N/A


### OVERLAP PROGRAMMING DETAIL

(program controller as shown below)


FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

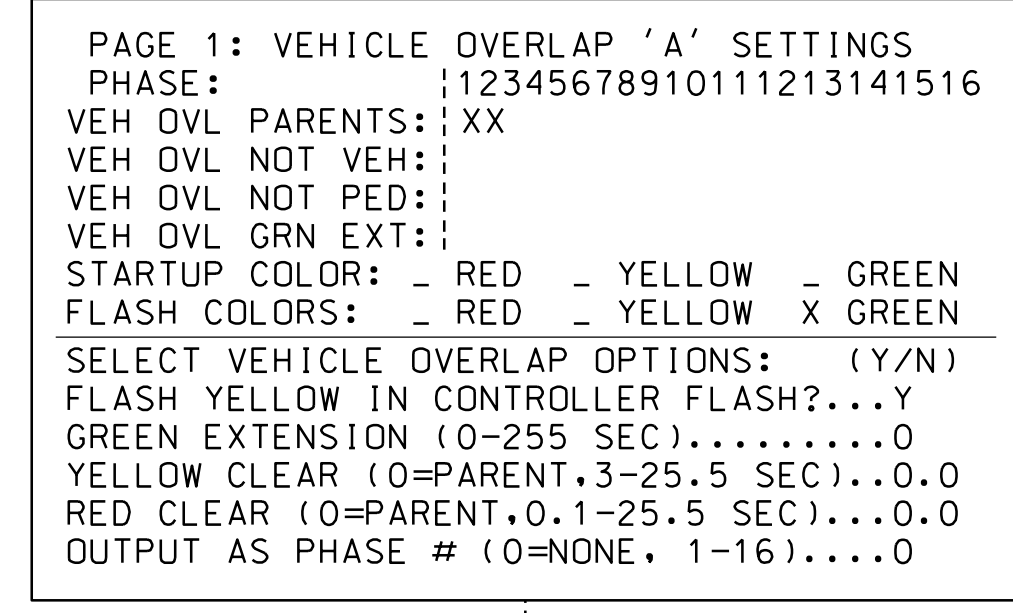


← NOTICE GREEN FLASH

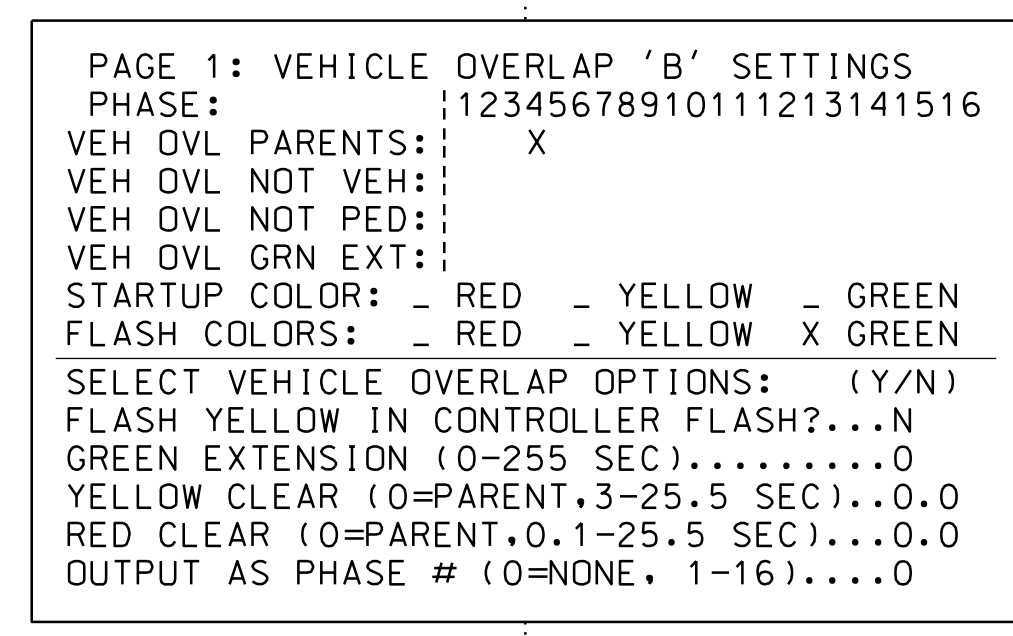

← NOTICE GREEN FLASH

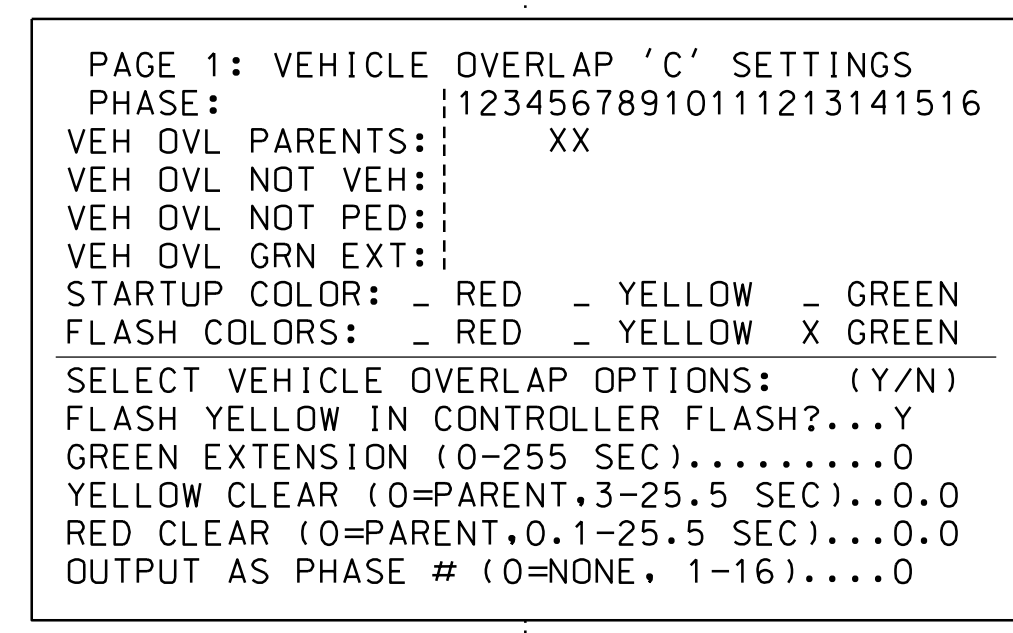

← NOTICE GREEN FLASH

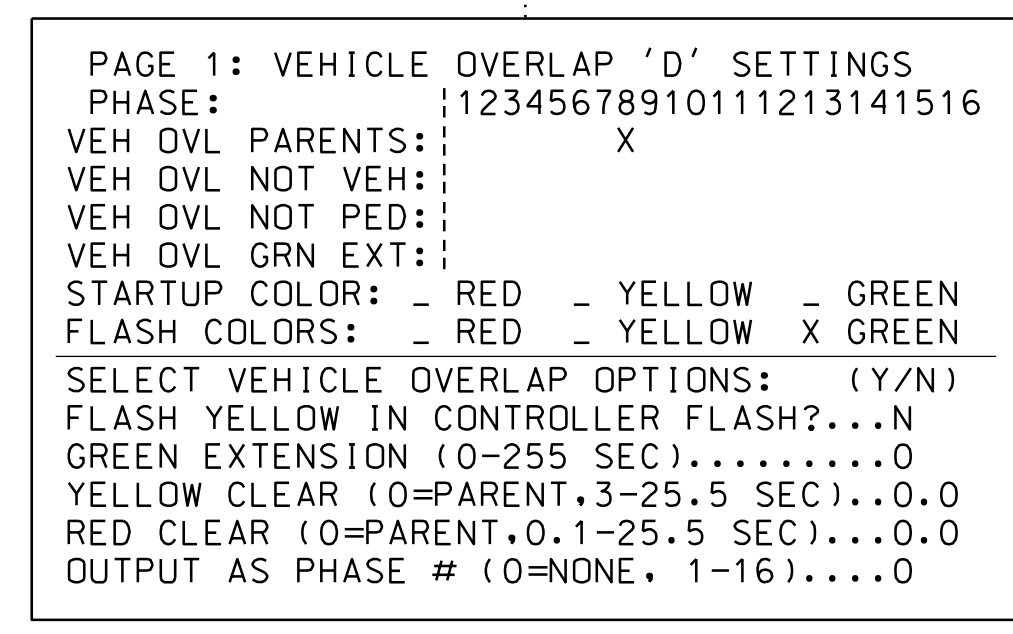


← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

Electrical Detail  
Sheet 2 of 2

ELECTRICAL AND PROGRAMMING DETAILS FOR:




750 N. Greenfield Pkwy, Garner, NC 27529

US 13-258/NC 903 (MLK Jr. Pkwy.) at US 258/NC 91 Division 2 Greene County Snow Hill	
PLAN DATE: June 2019	REVIEWED BY: WJ Hamilton
PREPARED BY: TS Popelka	RKA PROJ. NO: 17346 (040)
REVISIONS	INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL




William J. Hamilton 6-11-19  
SIGNATURE DATE  
SIG. INVENTORY NO. 02-0336

Prepared in the offices of:


**RAMEY KEMP ASSOCIATES, INC.**  
Transportation Engineers  
5808 Stratford Plaza, Suite 100  
Raleigh, North Carolina 27606  
919-872-9115 Tel. 919-876-6116 Fax  
www.rameykemp.com

**Design Loading for METAL POLE NO. 1**

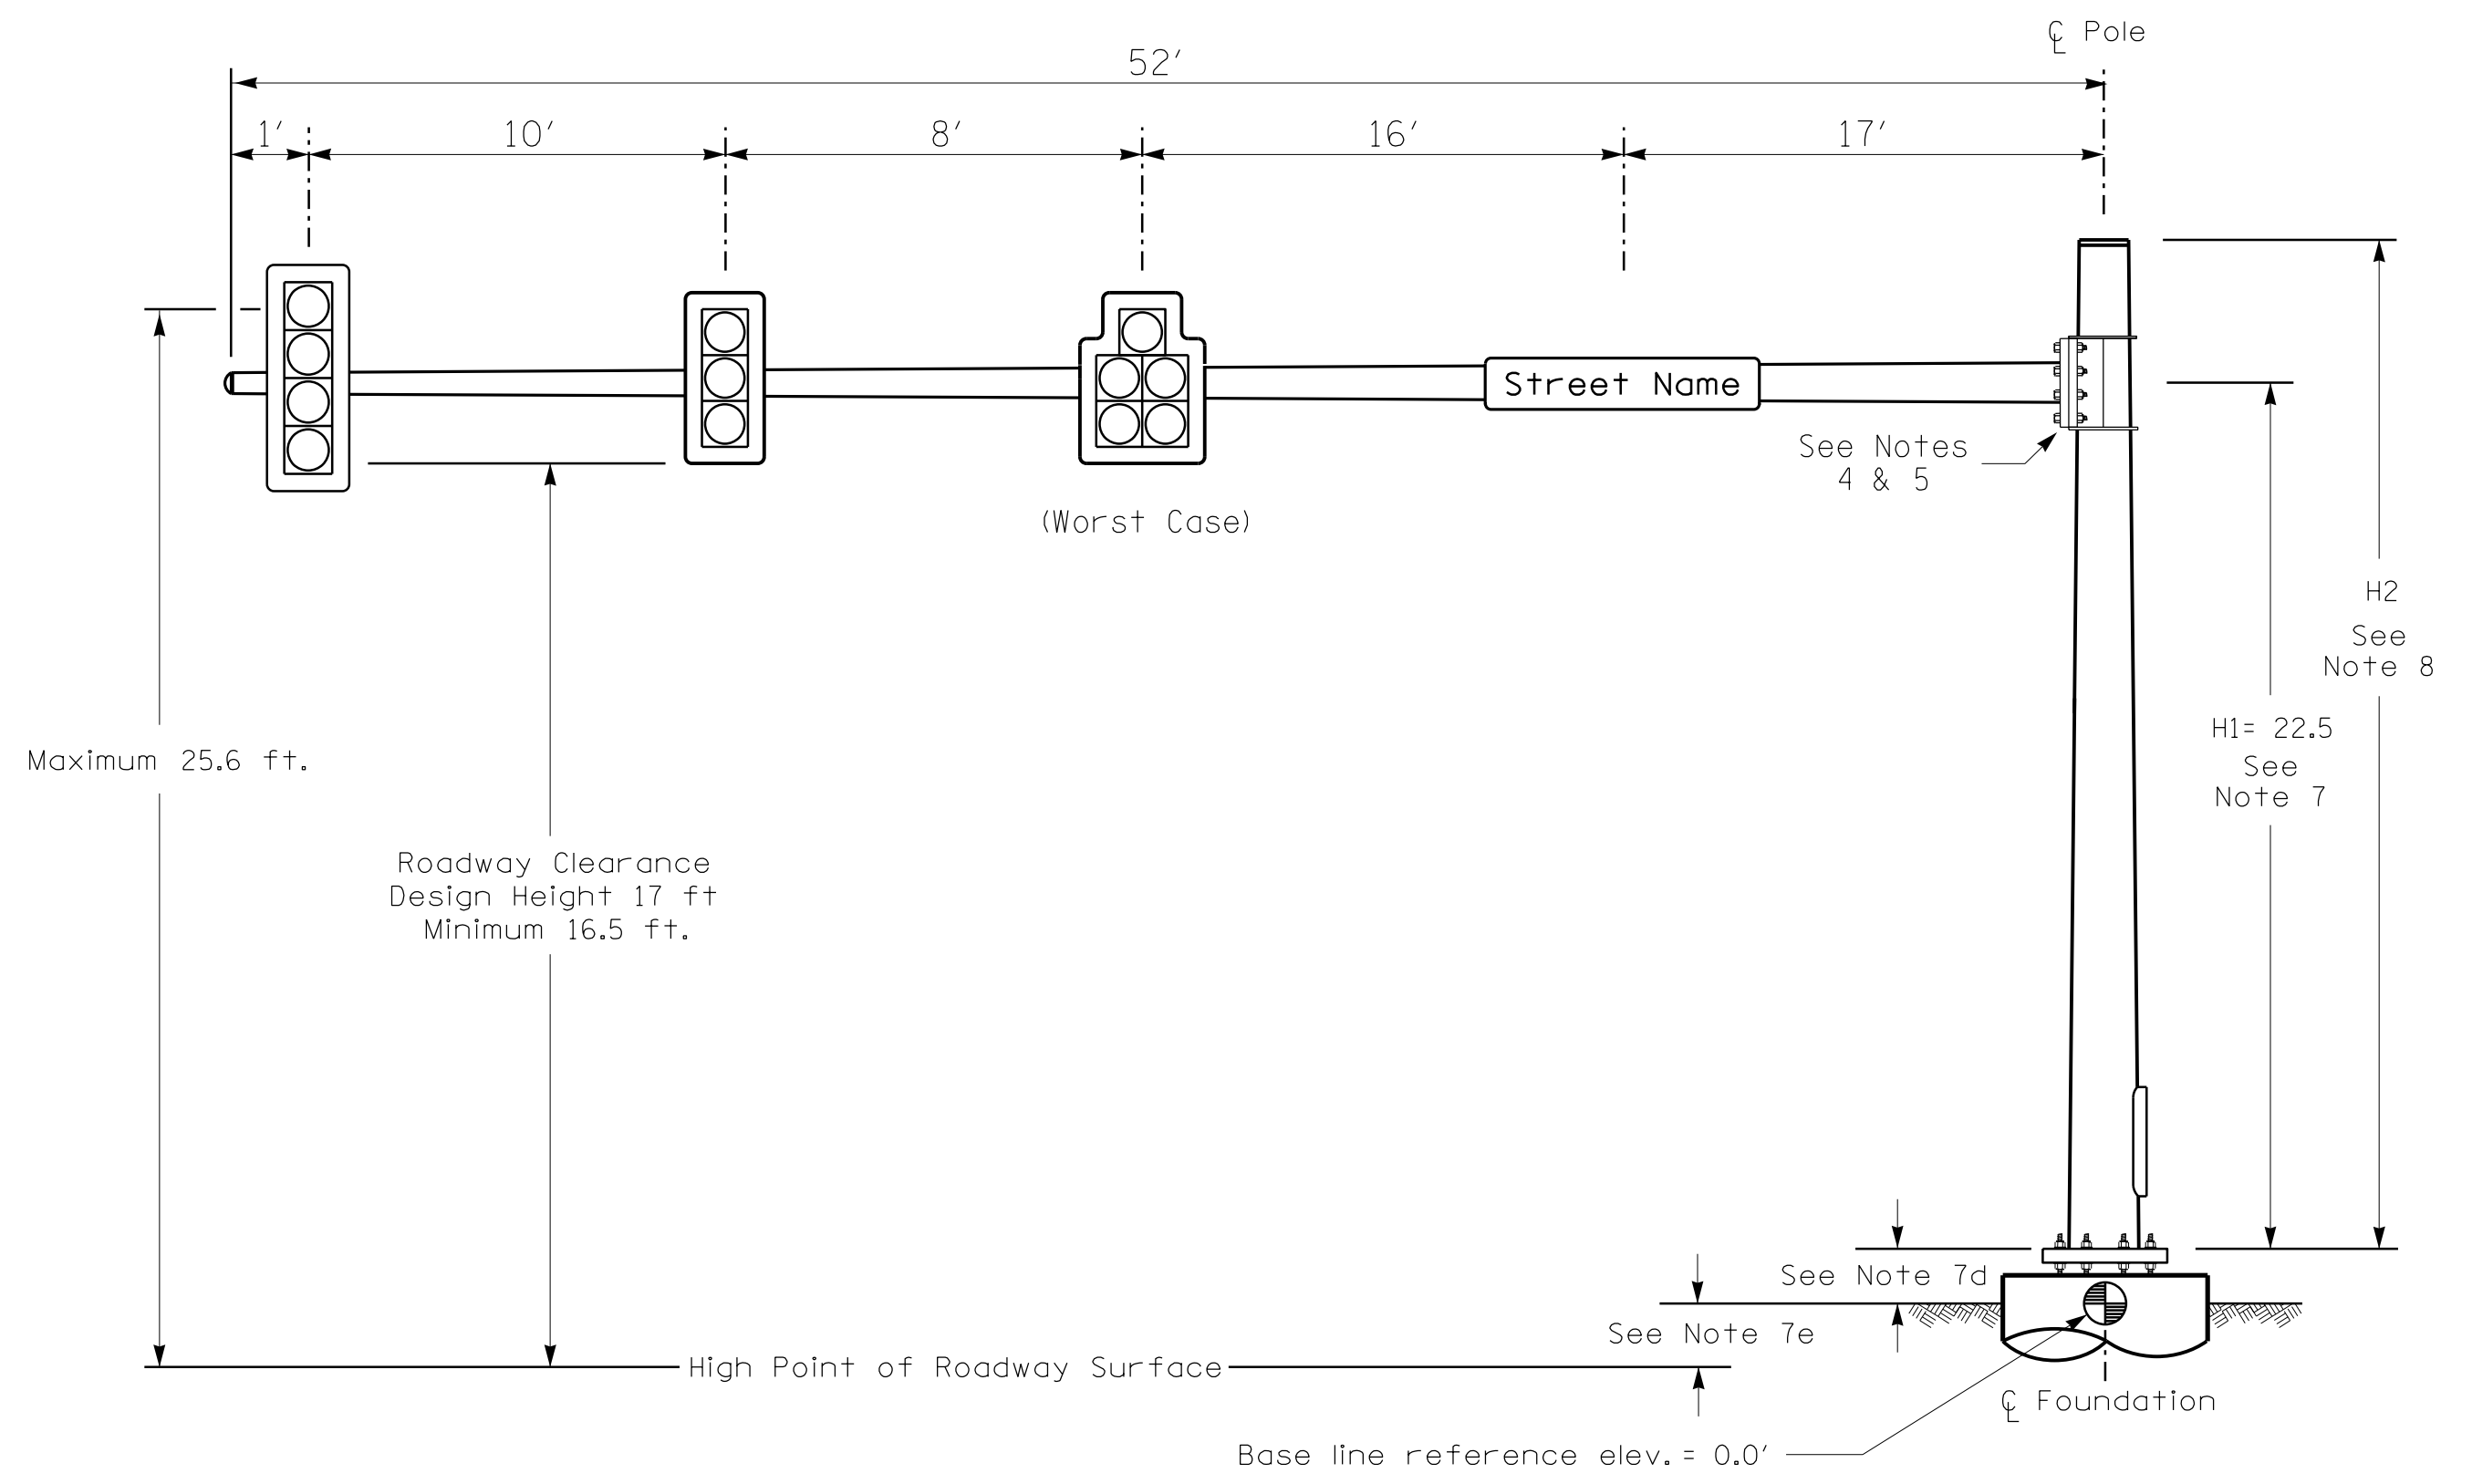

Elevation View

**Design Loading for METAL POLE NO. 2**

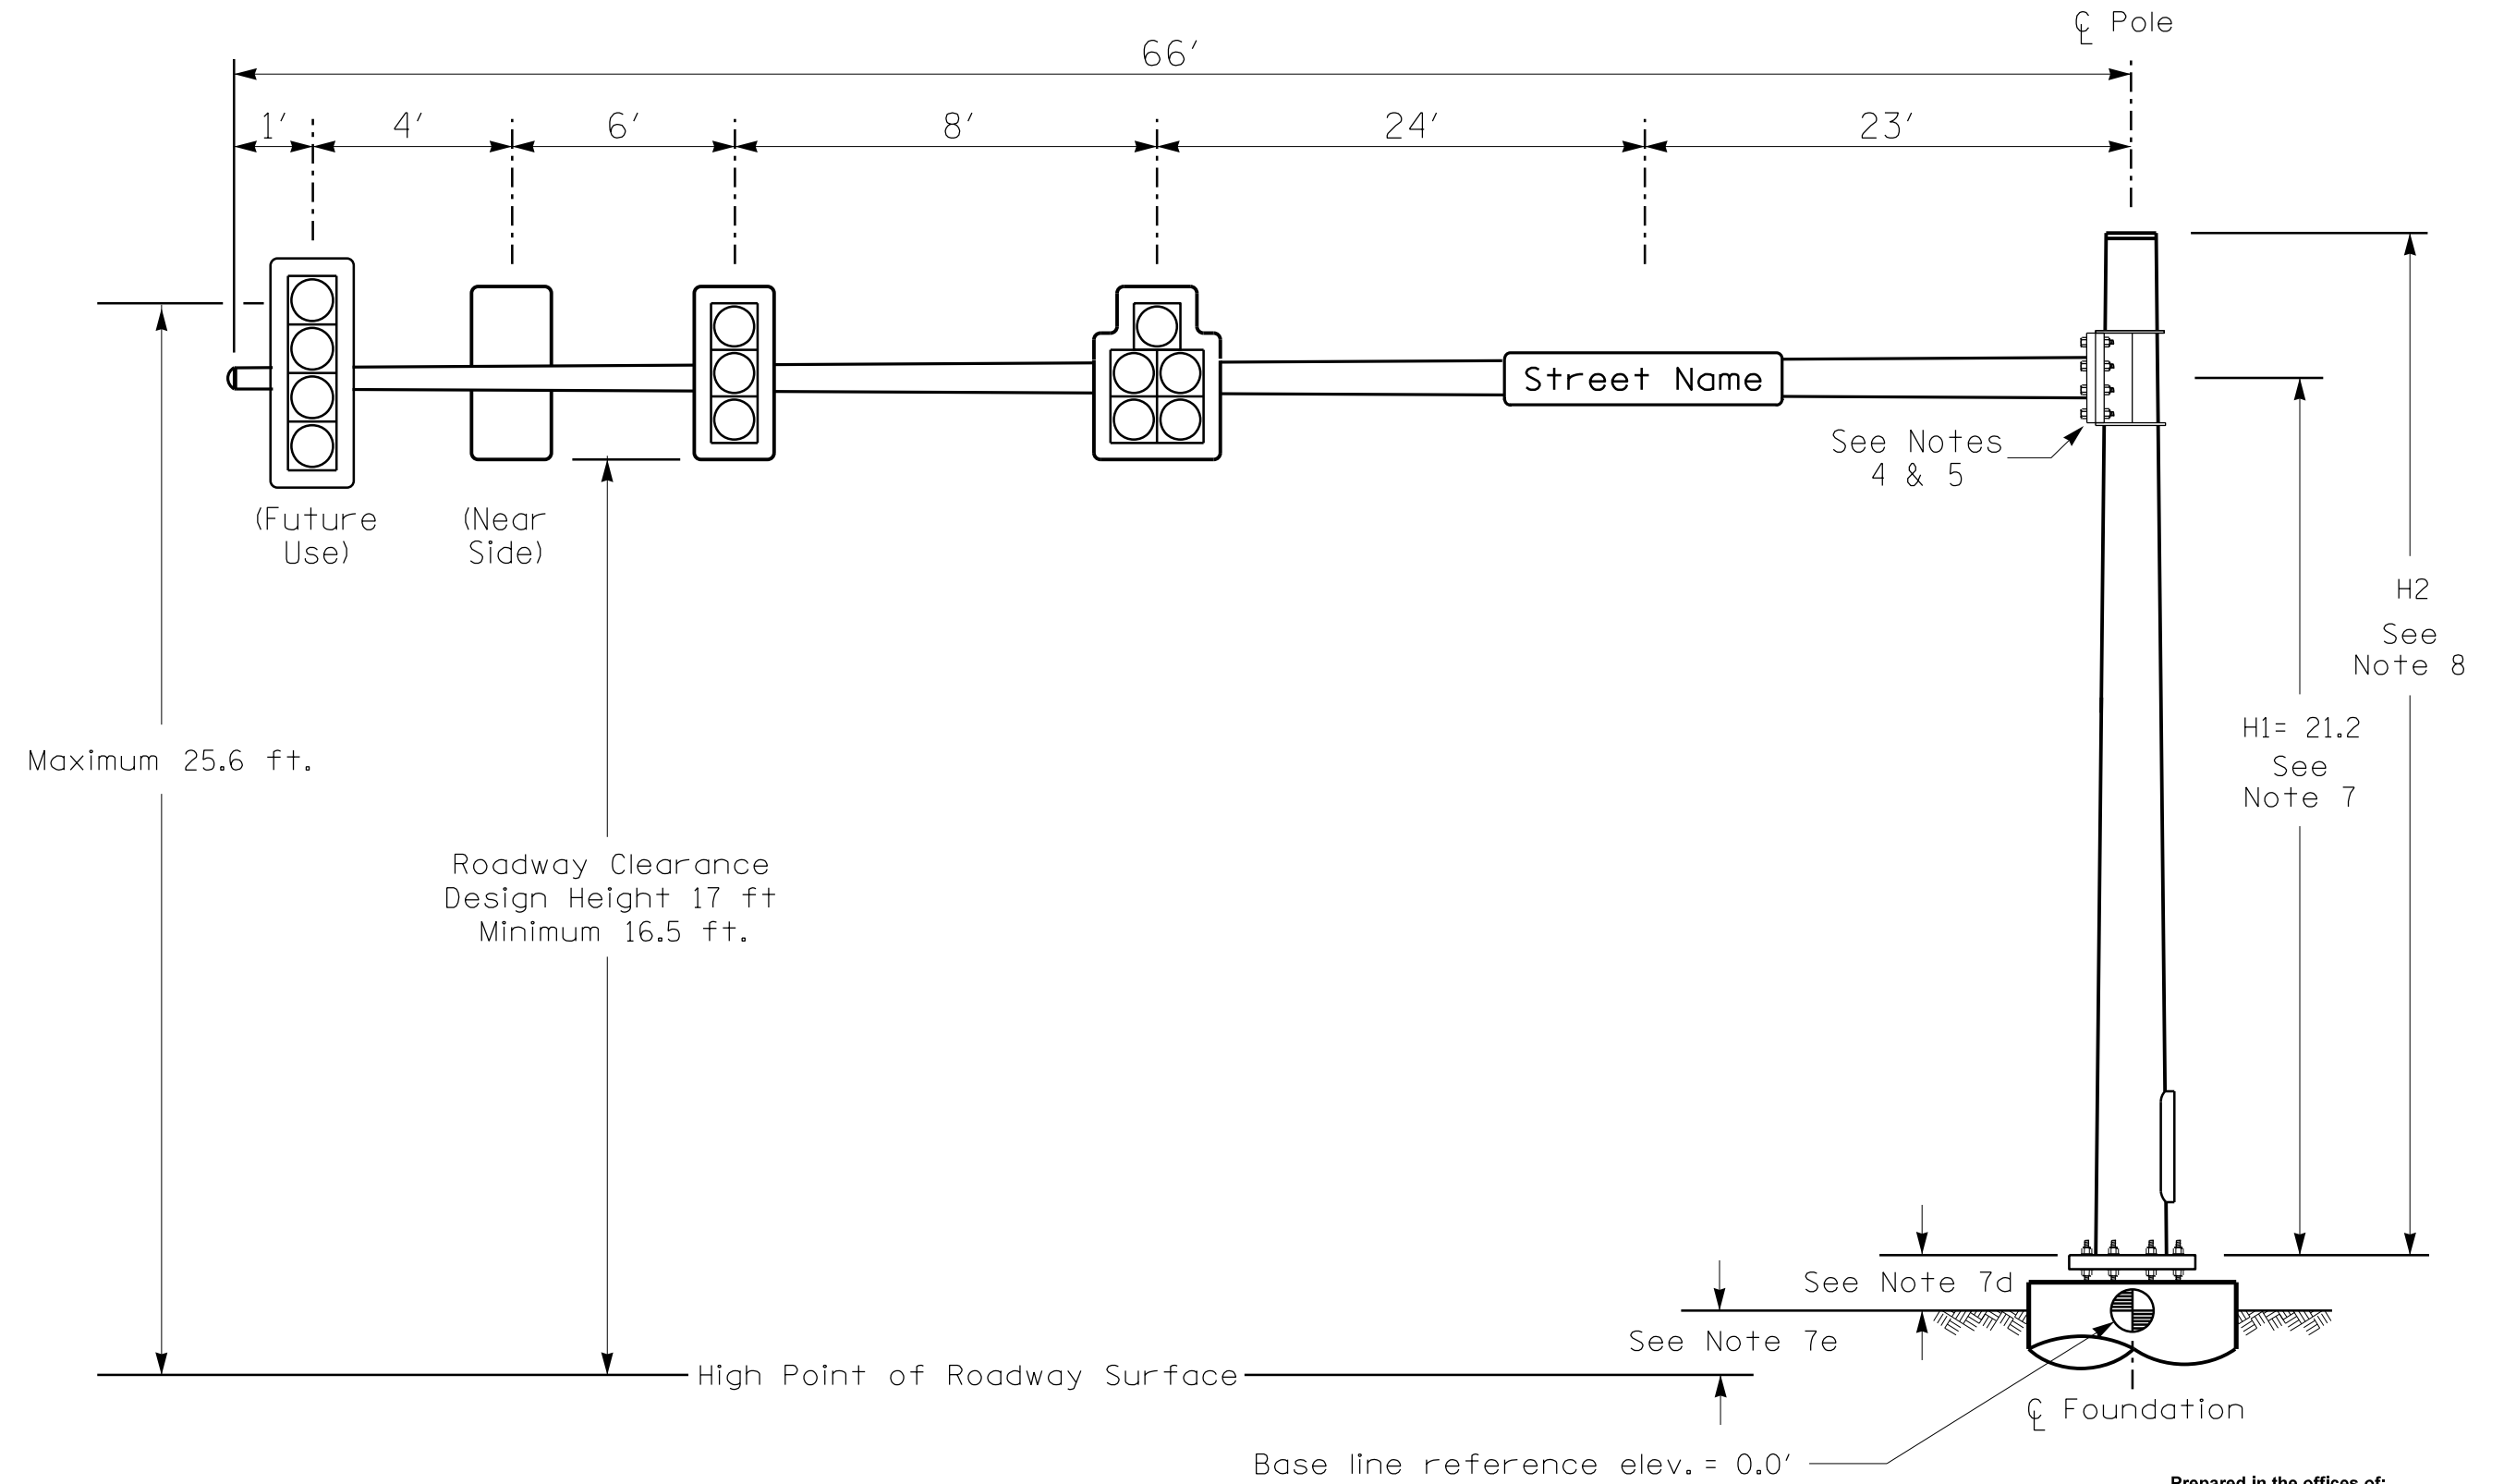

Elevation View




Prepared in the offices of:

**RAMEY KEMP ASSOCIATES, INC.**  
 Transportation Engineers  
 8102 Pennington Place, Suite 100  
 Raleigh, North Carolina 27608  
 919-270-1115 / 919-270-5416 Fax  
 www.rameykemp.com

**SPECIAL NOTE**  
 The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

**Elevation Data for Mast Arm Attachment (H1)**

Elevation Differences for:	Pole 4	Pole 5
Baseline reference point at $\phi$ Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+3.5 ft.	+2.6 ft.
Elevation difference at Edge of travelway or face of curb	+3.0 ft.	+1.7 ft.

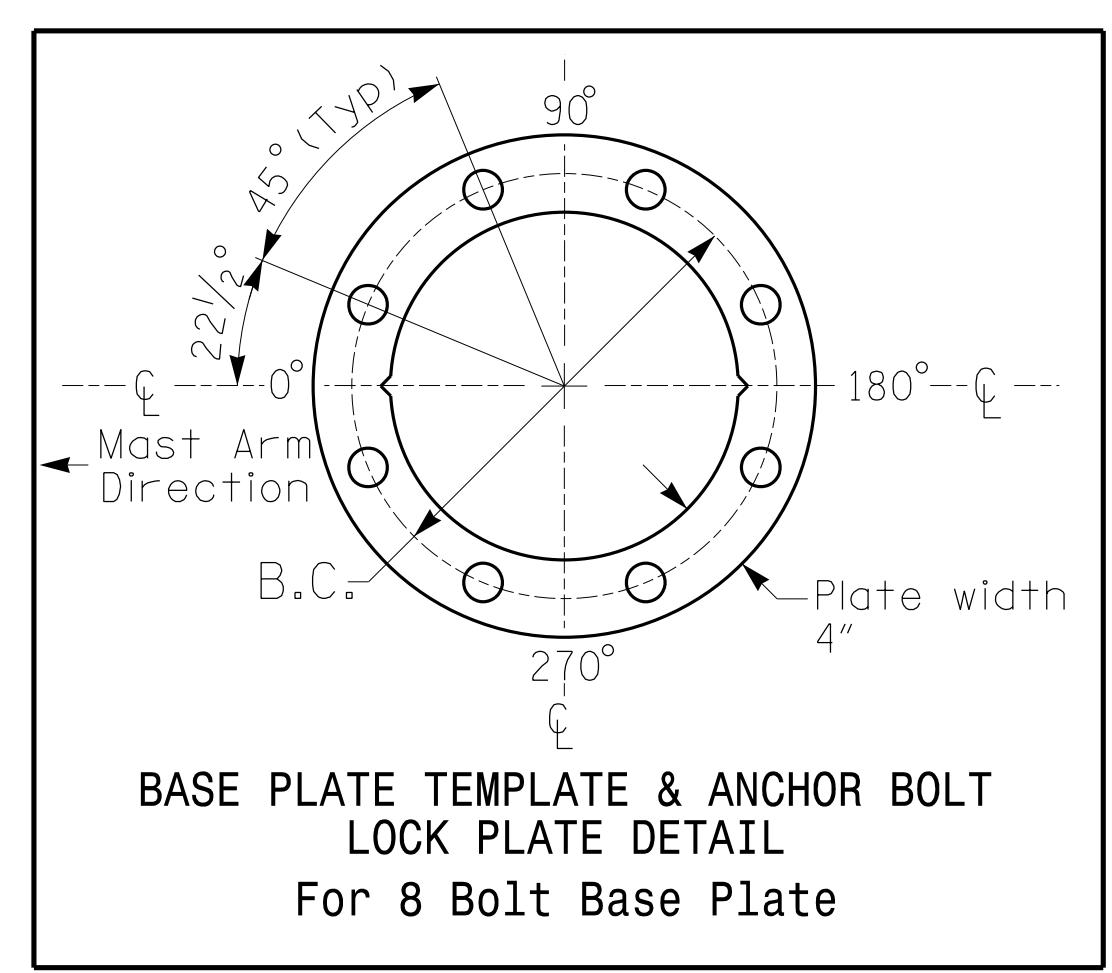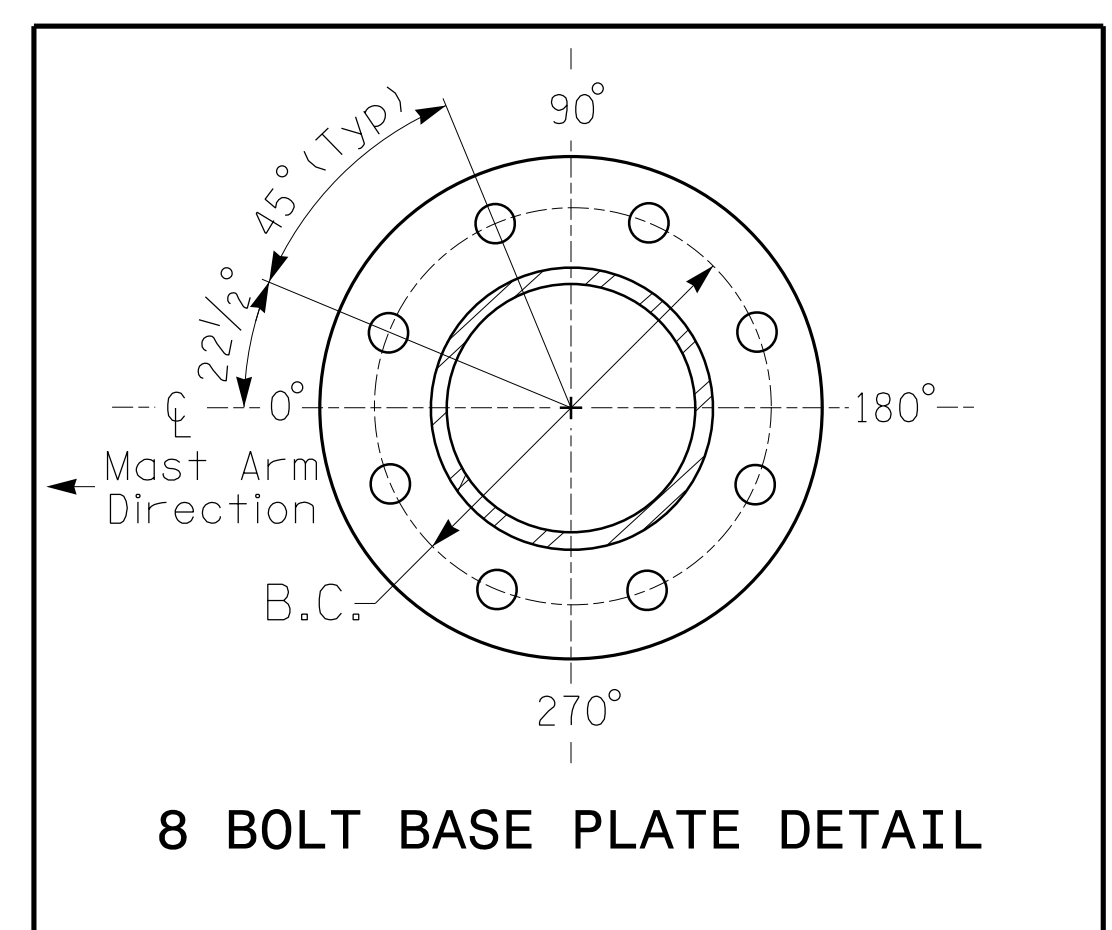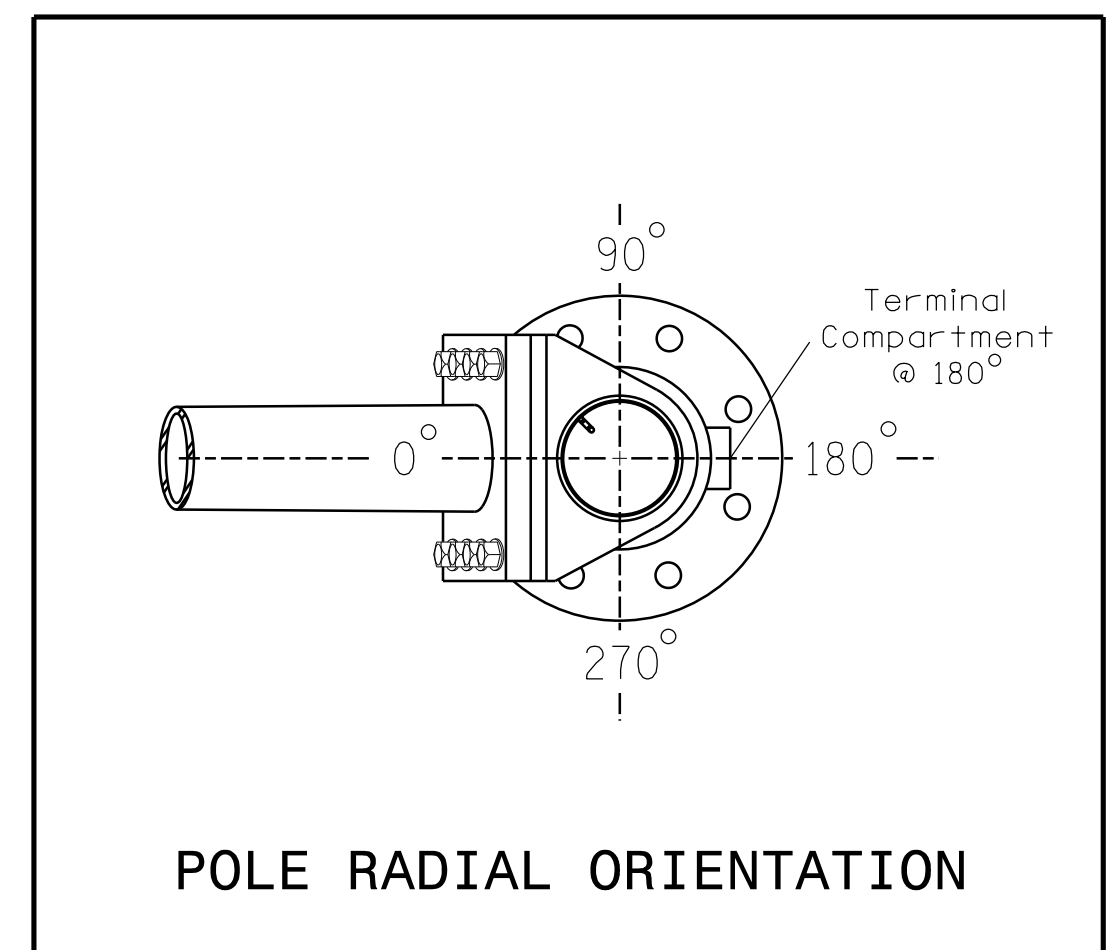

**MAST ARM LOADING SCHEDULE**

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
	STREET NAME SIGN RIGID MOUNTED	12.0 S.F.	18.0" W X 96.0" L	27 LBS

**NOTES**

**DESIGN REFERENCE MATERIAL**

- Design the traffic signal structure and foundation in accordance with:
  - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
  - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
  - The 2018 NCDOT Roadway Standard Drawings.
  - The traffic signal project plans and special provisions.
  - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

**DESIGN REQUIREMENTS**

- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- The camber design for the mast arm deflection should provide an appearance of a low pitched arch where the tip or the free end of the mast arm does not deflect below horizontal when fully loaded.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
  - Mast arm slope and deflection are not considered in determining the arm attachment height as they are assumed to offset each other.
  - Signal heads are rigidly mounted and vertically centered on the mast arm.
  - The roadway clearance height for design is as shown in the elevation views. The top of the pole base plate is 0.75 feet above the ground elevation.
  - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
  - Mast arm attachment height (H1) plus 2 feet, or
  - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

NCDOT Wind Zone 2 (130 mph)

Prepared For:

750 N. Greenfield Pkwy, Garner, NC 27529


US 13-258/NC 903 (MLK Jr. Pkwy.)		at		US 258/NC 91	
Division 2		Greene County		Snow Hill	
PLAN DATE: June 2019	REVIEWED BY: WJ Hamilton	PREPARED BY: TS Popelka	RKA PROJ. NO: 17346 (040)	REVISIONS	INIT. DATE
SIGNATURE		DATE		DATE	

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

William J. Hamilton  
 6-11-19  
 SIGNATURE DATE


SIG. INVENTORY NO. 02-0336

**Design Loading for METAL POLE NO. 3**

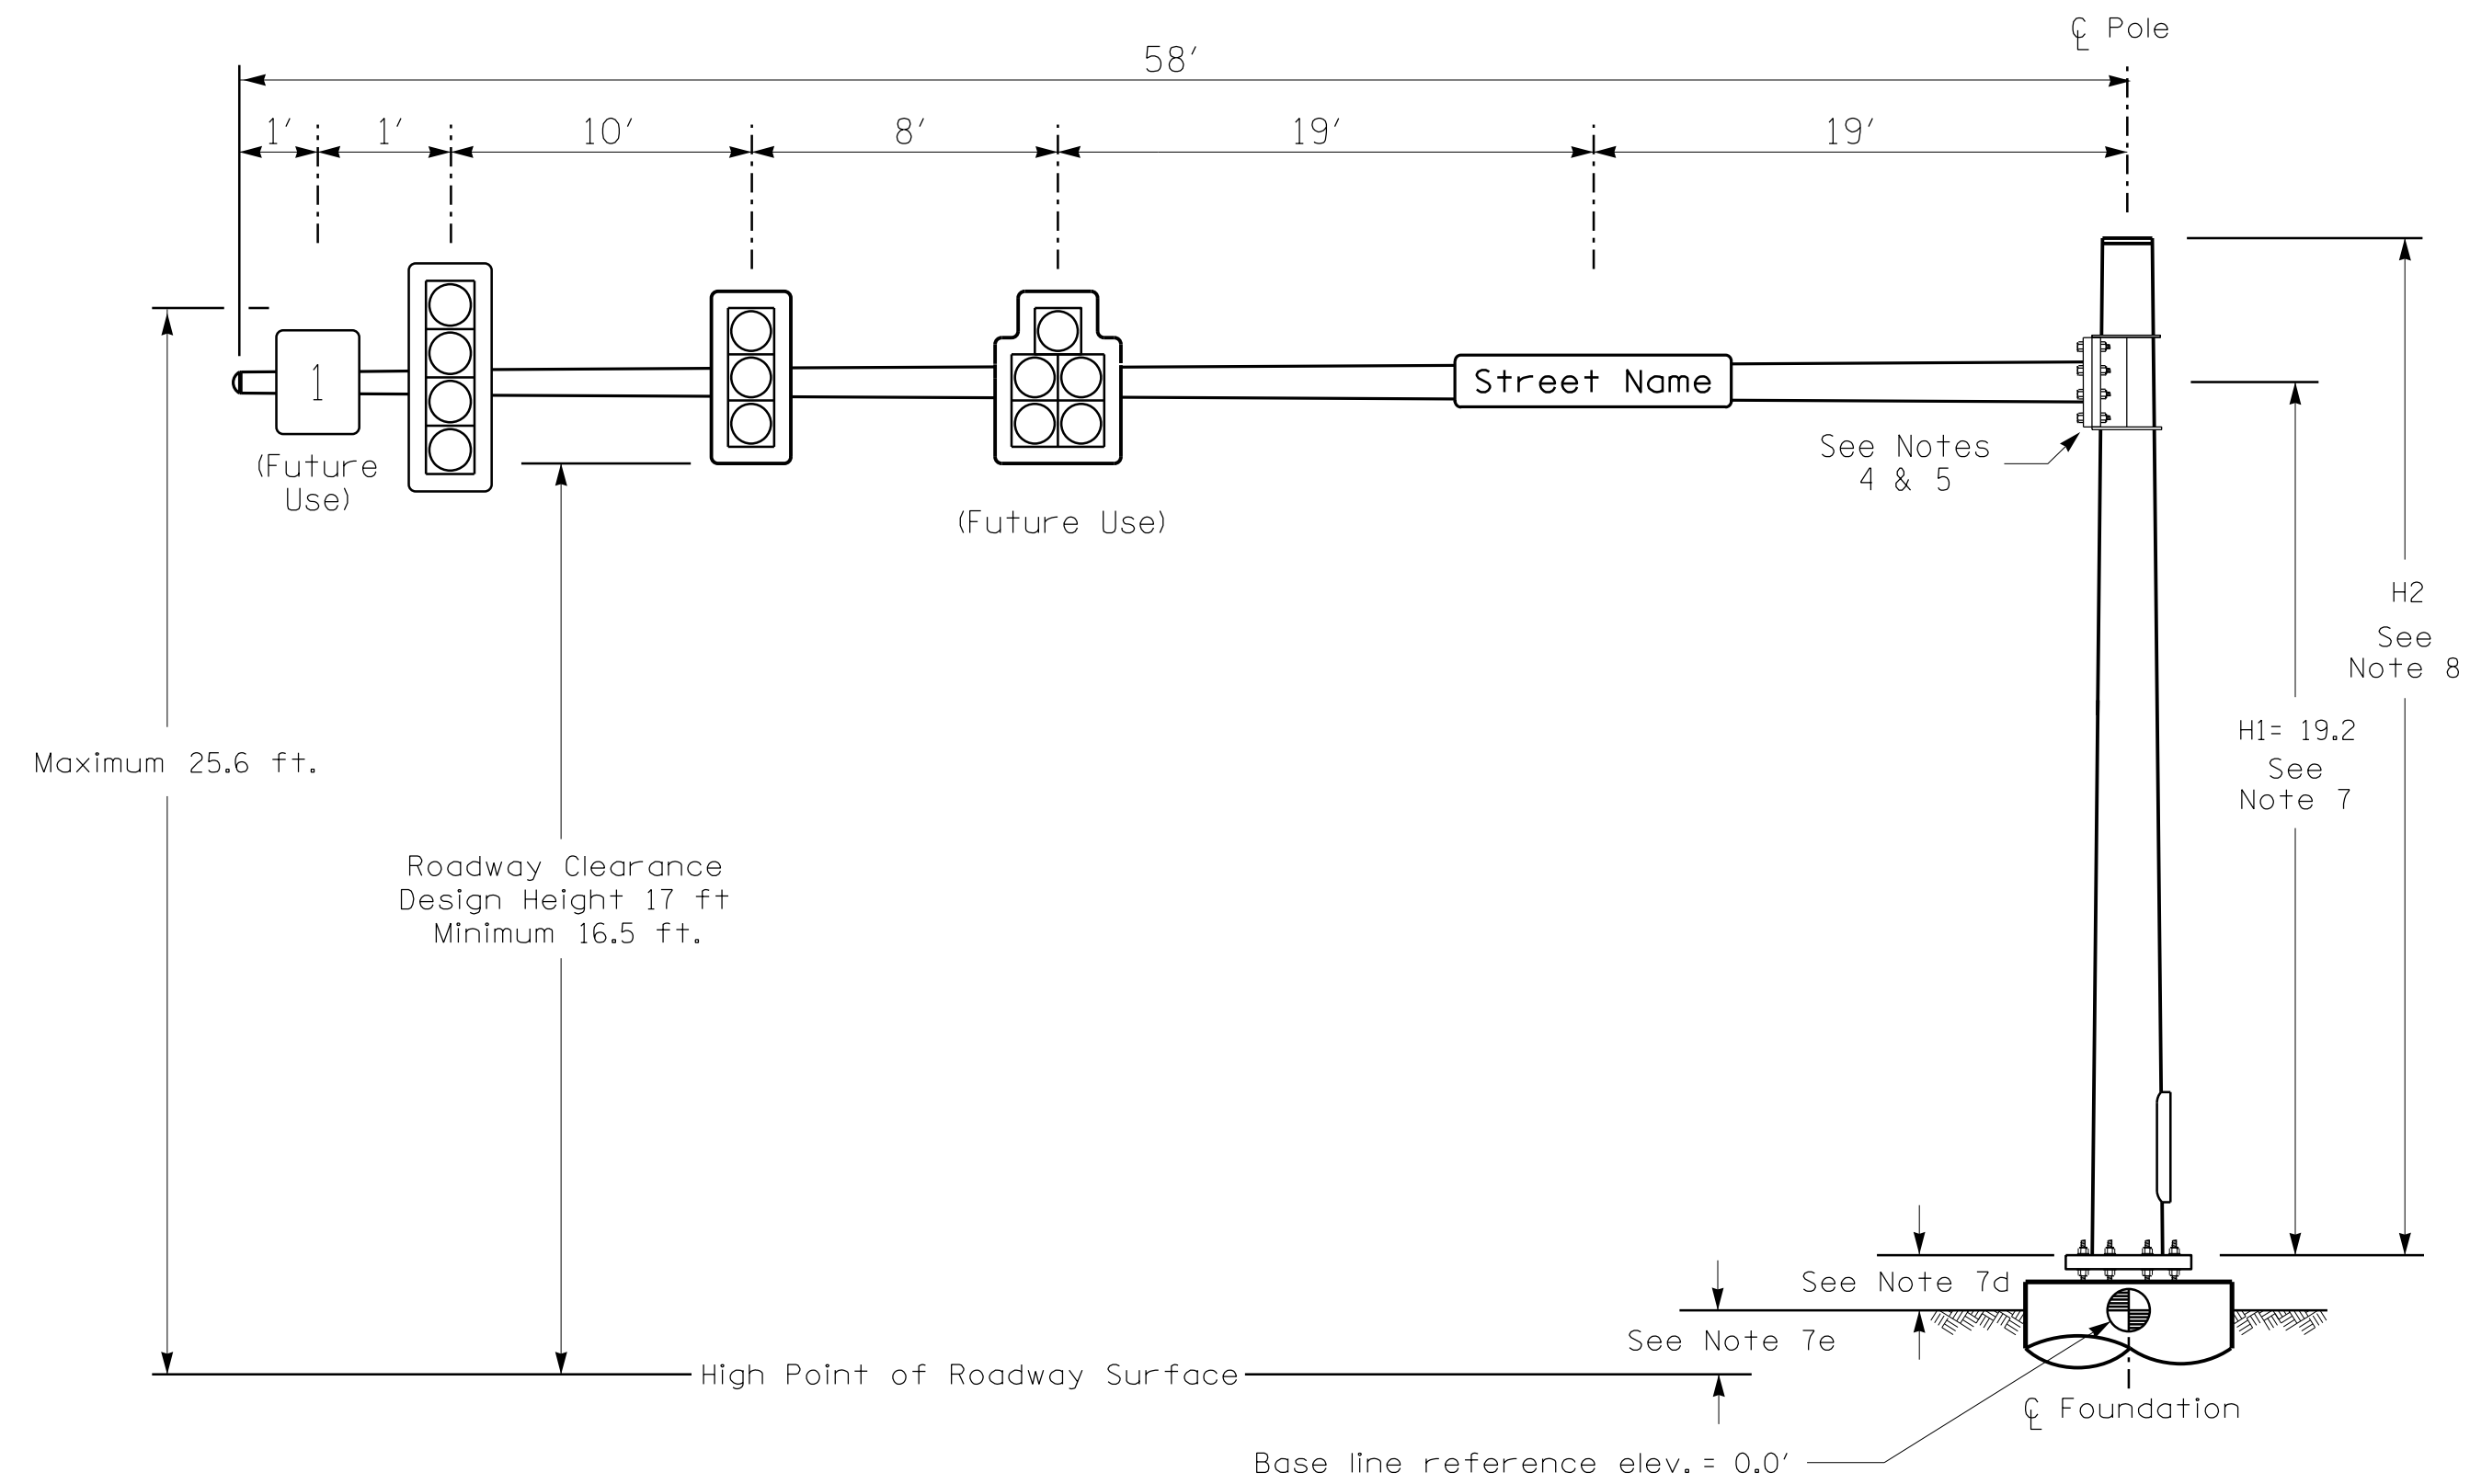

Elevation View

**Design Loading for METAL POLE NO. 4**

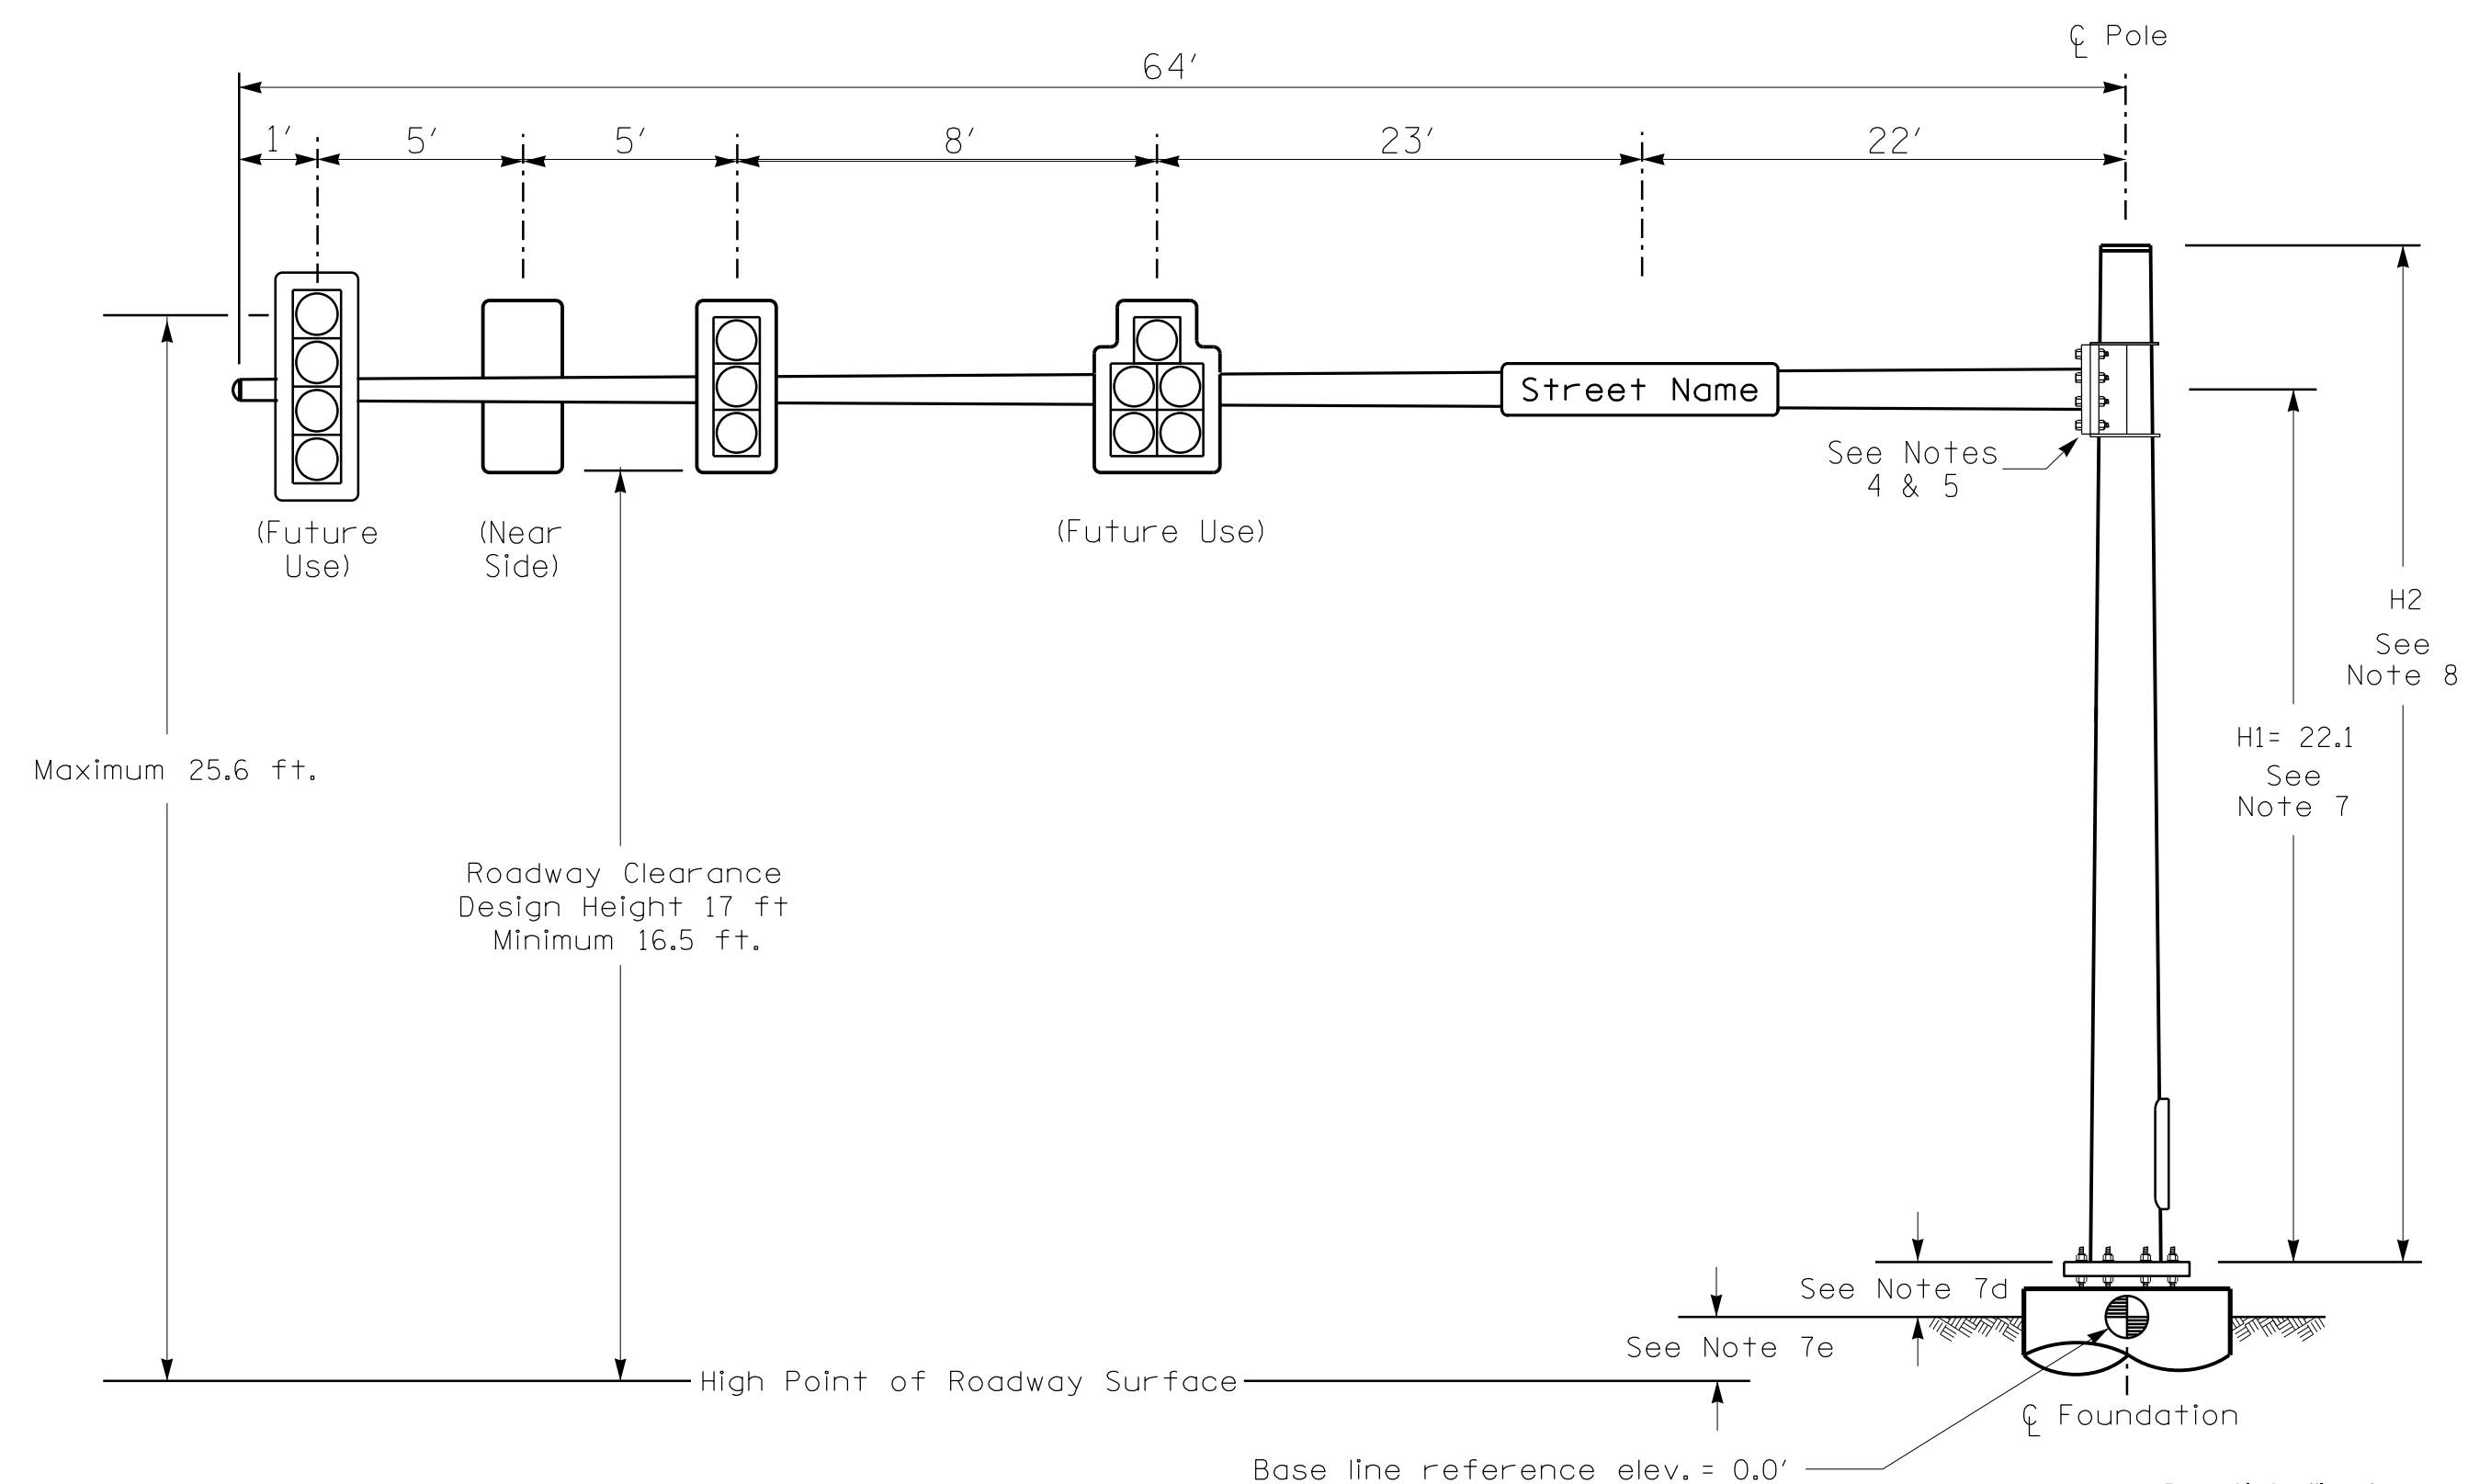

Elevation View


Prepared in the offices of:  
**RAMEY KEMP ASSOCIATES, INC.**  
 Transportation Engineers  
 8102 Farmington Plaza, Suite 100  
 Raleigh, North Carolina 27608  
 919-273-1115 TEL 919-878-5416 FAX  
 www.rameykemp.com

**SPECIAL NOTE**


The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

**Elevation Data for Mast Arm Attachment (H1)**


Elevation Differences for:	Pole 6	Pole 7
Baseline reference point at $\phi$ Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+0.2 ft.	+2.6 ft.
Elevation difference at Edge of travelway or face of curb	+0.1 ft.	+1.8 ft.

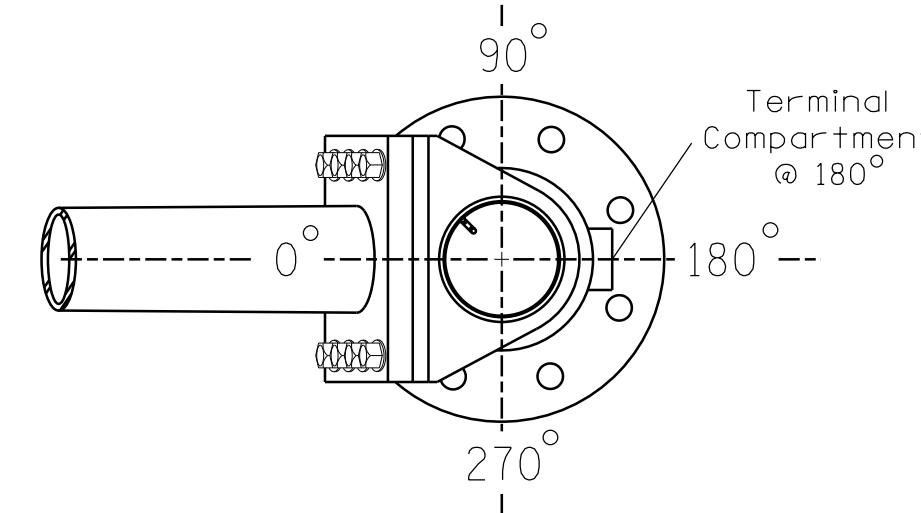

POLE RADIAL ORIENTATION

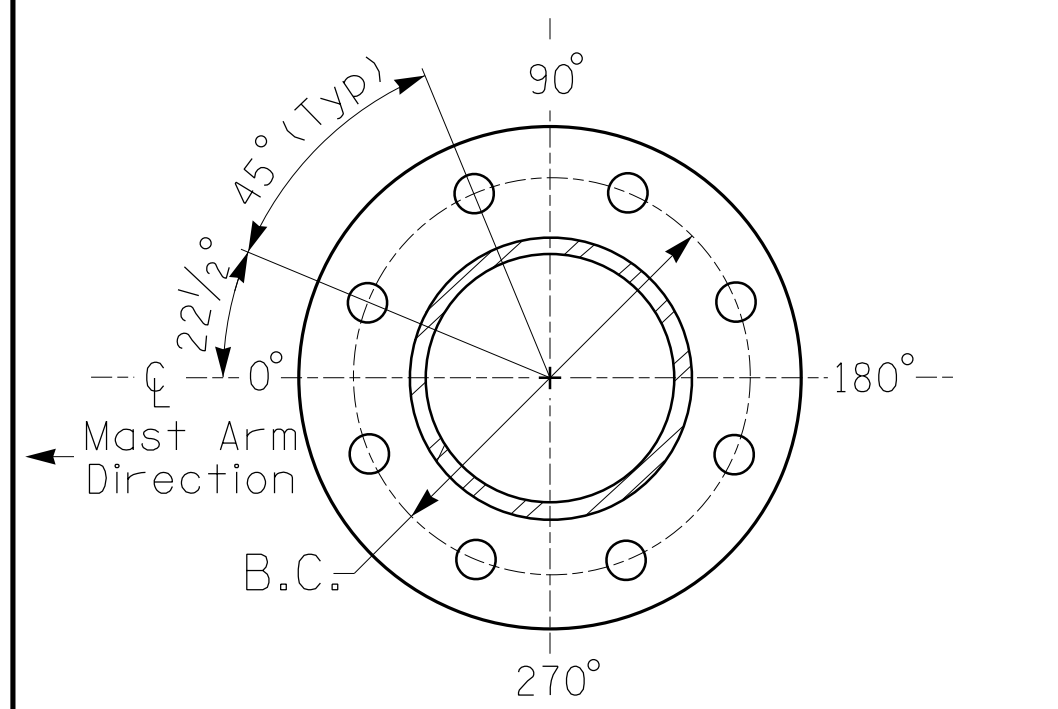

8 BOLT BASE PLATE DETAIL

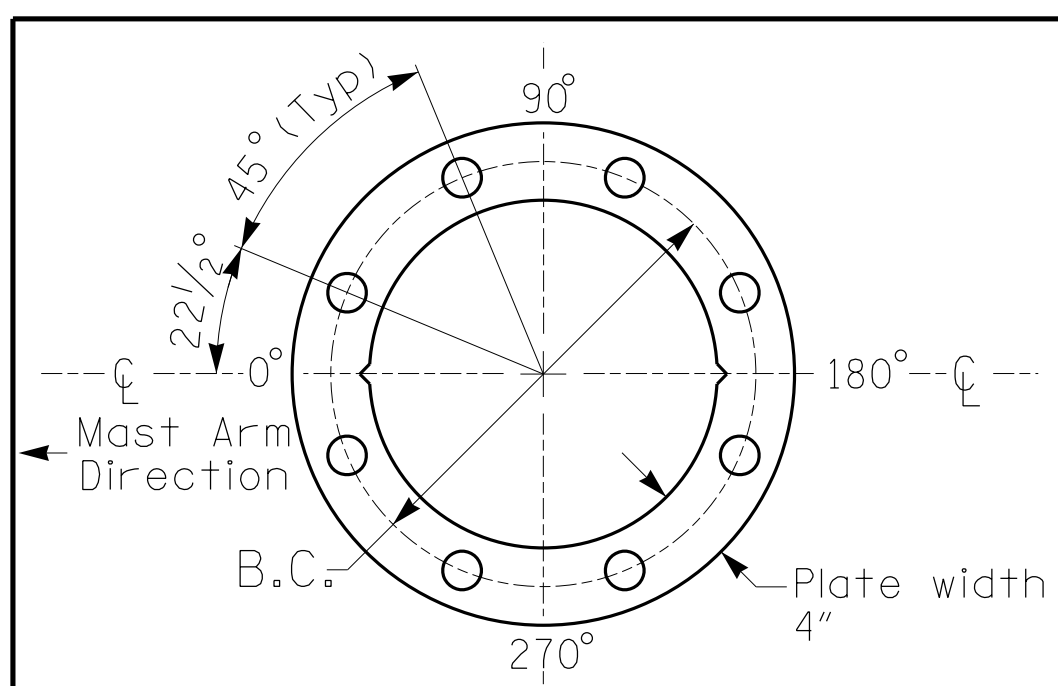

BASE PLATE TEMPLATE & ANCHOR BOLT LOCK PLATE DETAIL For 8 Bolt Base Plate

**MAST ARM LOADING SCHEDULE**

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
	SIGN RIGID MOUNTED	5.0 S.F.	24.0" W X 30.0" L	11 LBS
	STREET NAME SIGN RIGID MOUNTED	12.0 S.F.	18.0" W X 96.0" L	27 LBS

**NOTES**

**DESIGN REFERENCE MATERIAL**

- Design the traffic signal structure and foundation in accordance with:
  - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
  - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
  - The 2018 NCDOT Roadway Standard Drawings.
  - The traffic signal project plans and special provisions.
  - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

**DESIGN REQUIREMENTS**

- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- The camber design for the mast arm deflection should provide an appearance of a low pitched arch where the tip or the free end of the mast arm does not deflect below horizontal when fully loaded.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
  - Mast arm slope and deflection are not considered in determining the arm attachment height as they are assumed to offset each other.
  - Signal heads are rigidly mounted and vertically centered on the mast arm.
  - The roadway clearance height for design is as shown in the elevation views. The top of the pole base plate is 0.75 feet above the ground elevation.
  - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
  - Mast arm attachment height (H1) plus 2 feet, or
  - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.


NCDOT Wind Zone 2 (130 mph)

Prepared For:  
  
 750 N. Greenfield Pkwy, Garner, NC 27529

US 13-258/NC 903  
 (MLK Jr. Pkwy.)  
 at  
 US 258/NC 91  
 Division 2 Greene County Snow Hill  
 PLAN DATE: June 2019 REVIEWED BY: WJ Hamilton  
 PREPARED BY: TS Popelka RKA PROJ. NO: 17346 (040)  
 REVISIONS: INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL  
  
 William J. Hamilton 6/17/2019  
 SIGNATURE DATE  
 SIG. INVENTORY NO. 02-0336

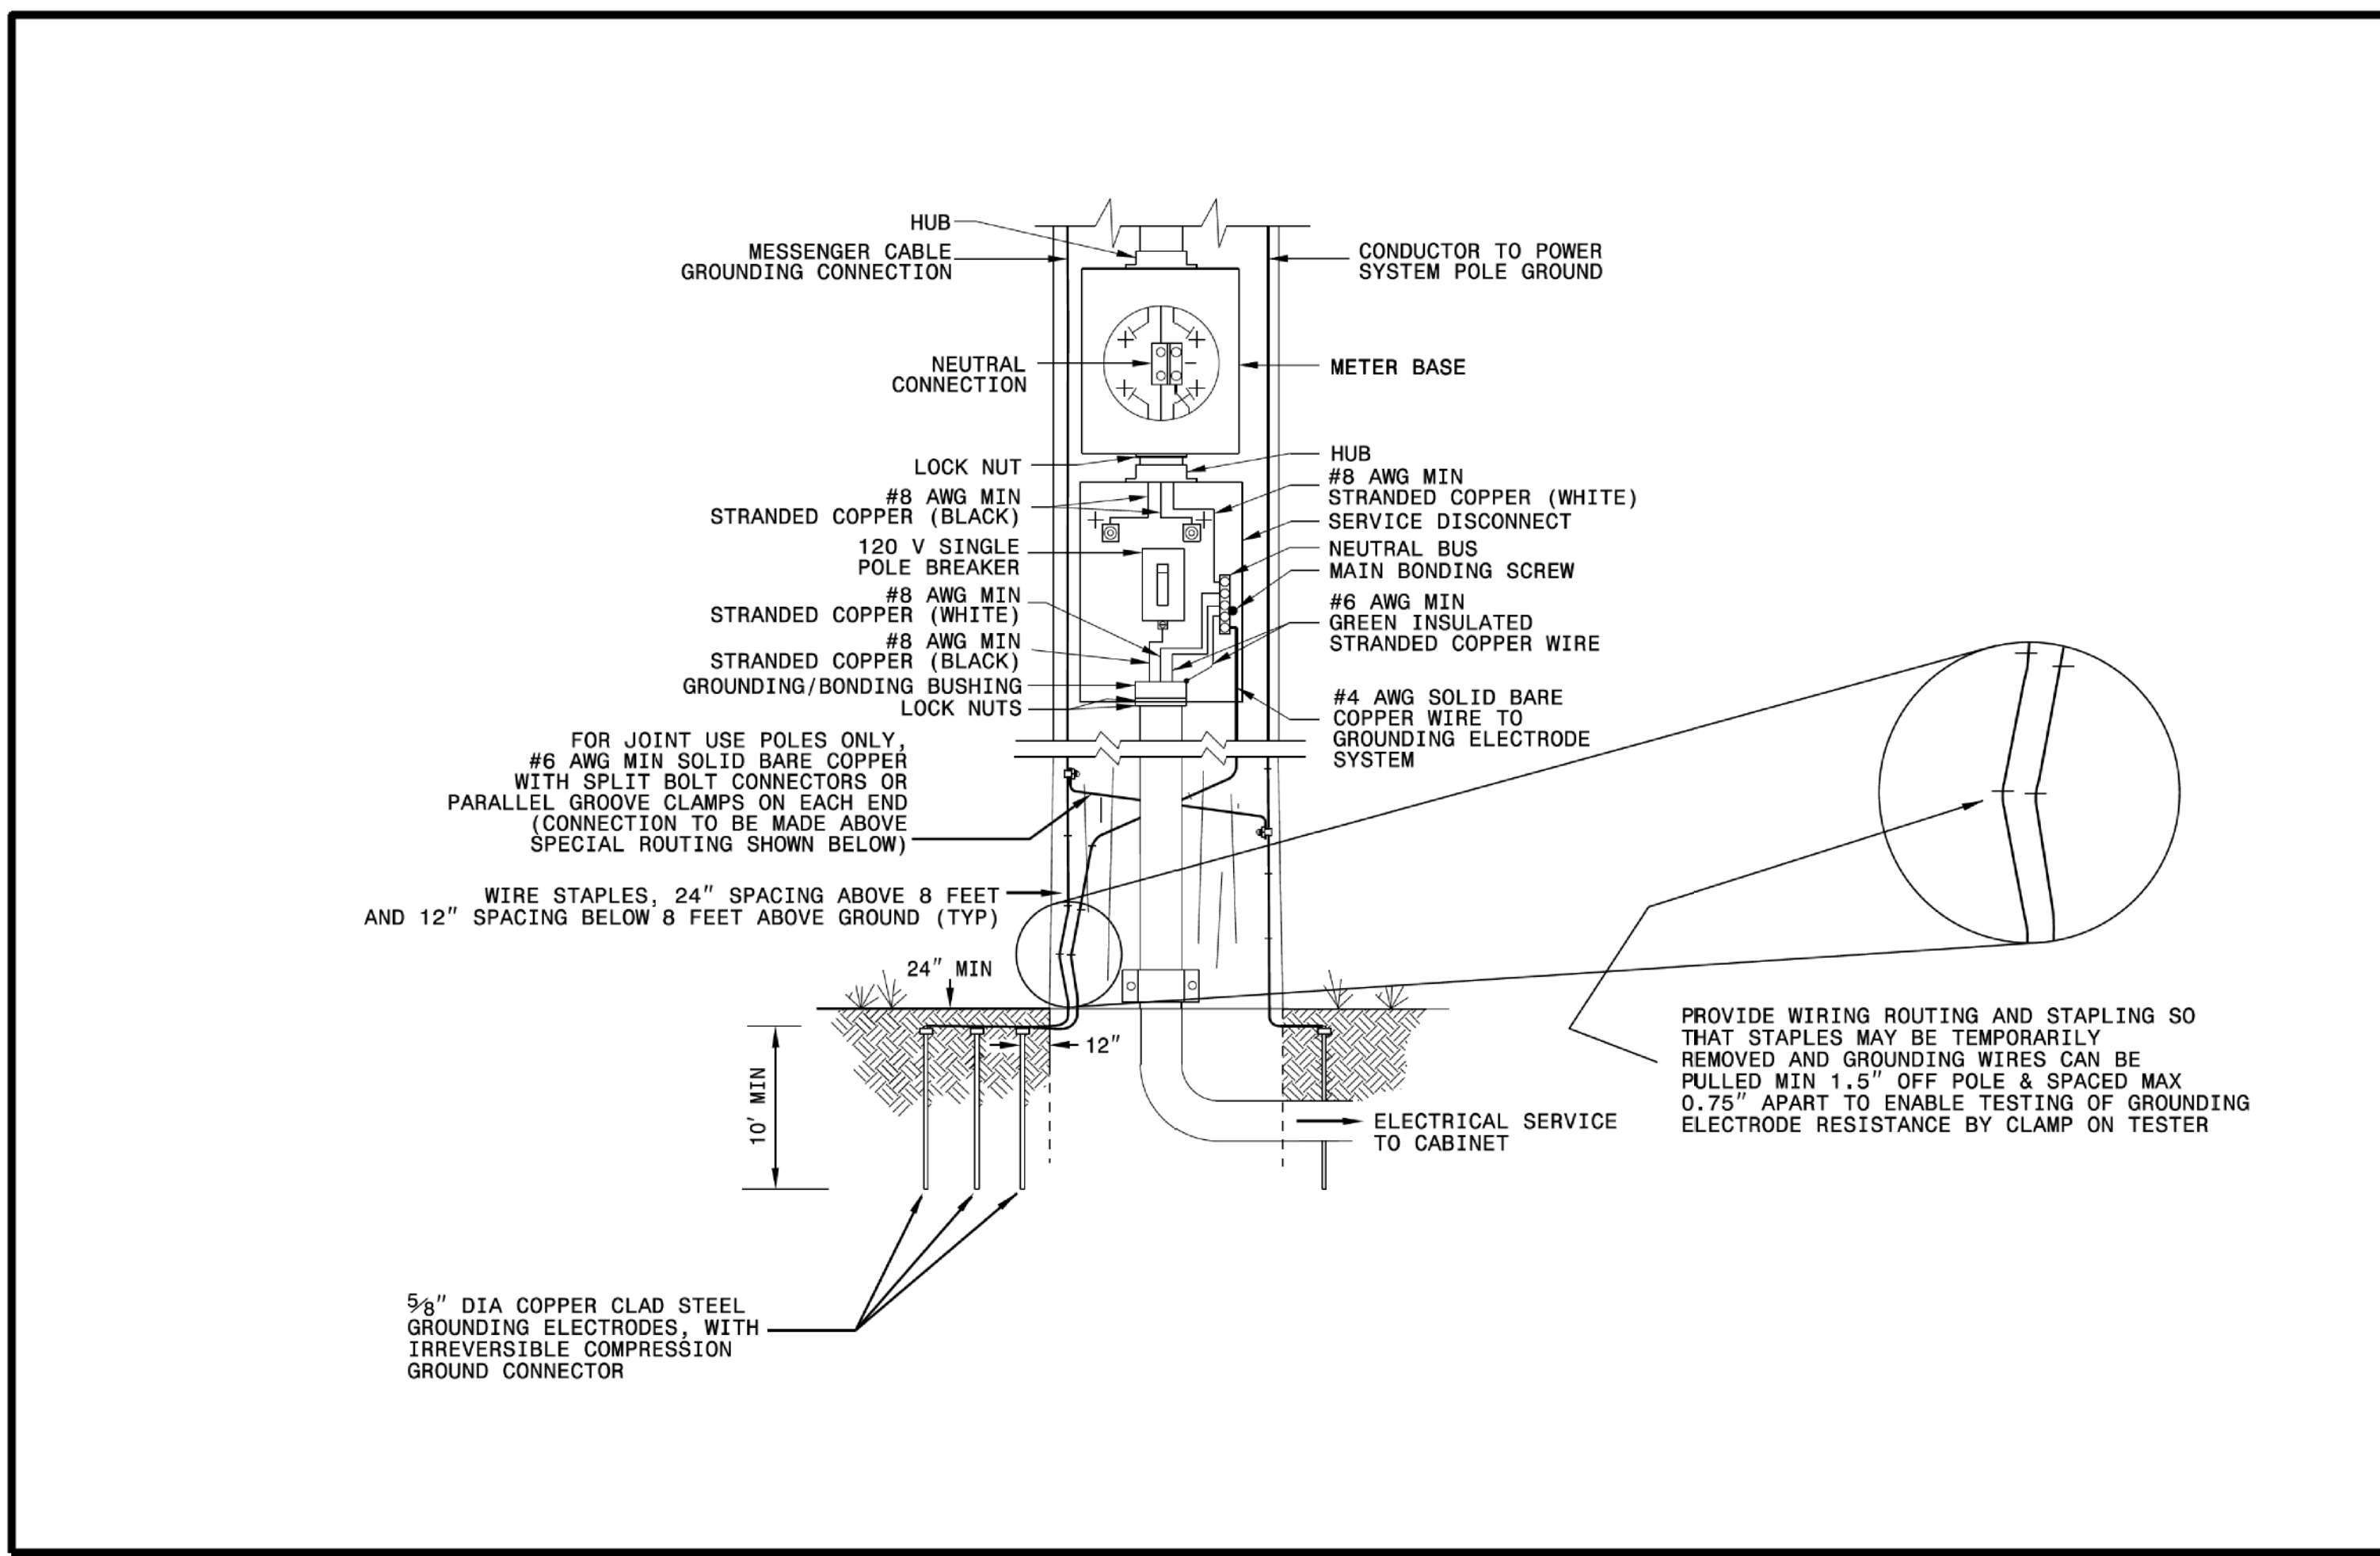


STATE OF NORTH CAROLINA  
DEPT. OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
RALEIGH, N. C.

1-18

ENGLISH STANDARD DRAWING FOR

**ELECTRICAL SERVICE GROUNDING**  
GROUNDING AND BONDING

SHEET 1 OF 1  
**1700D01**

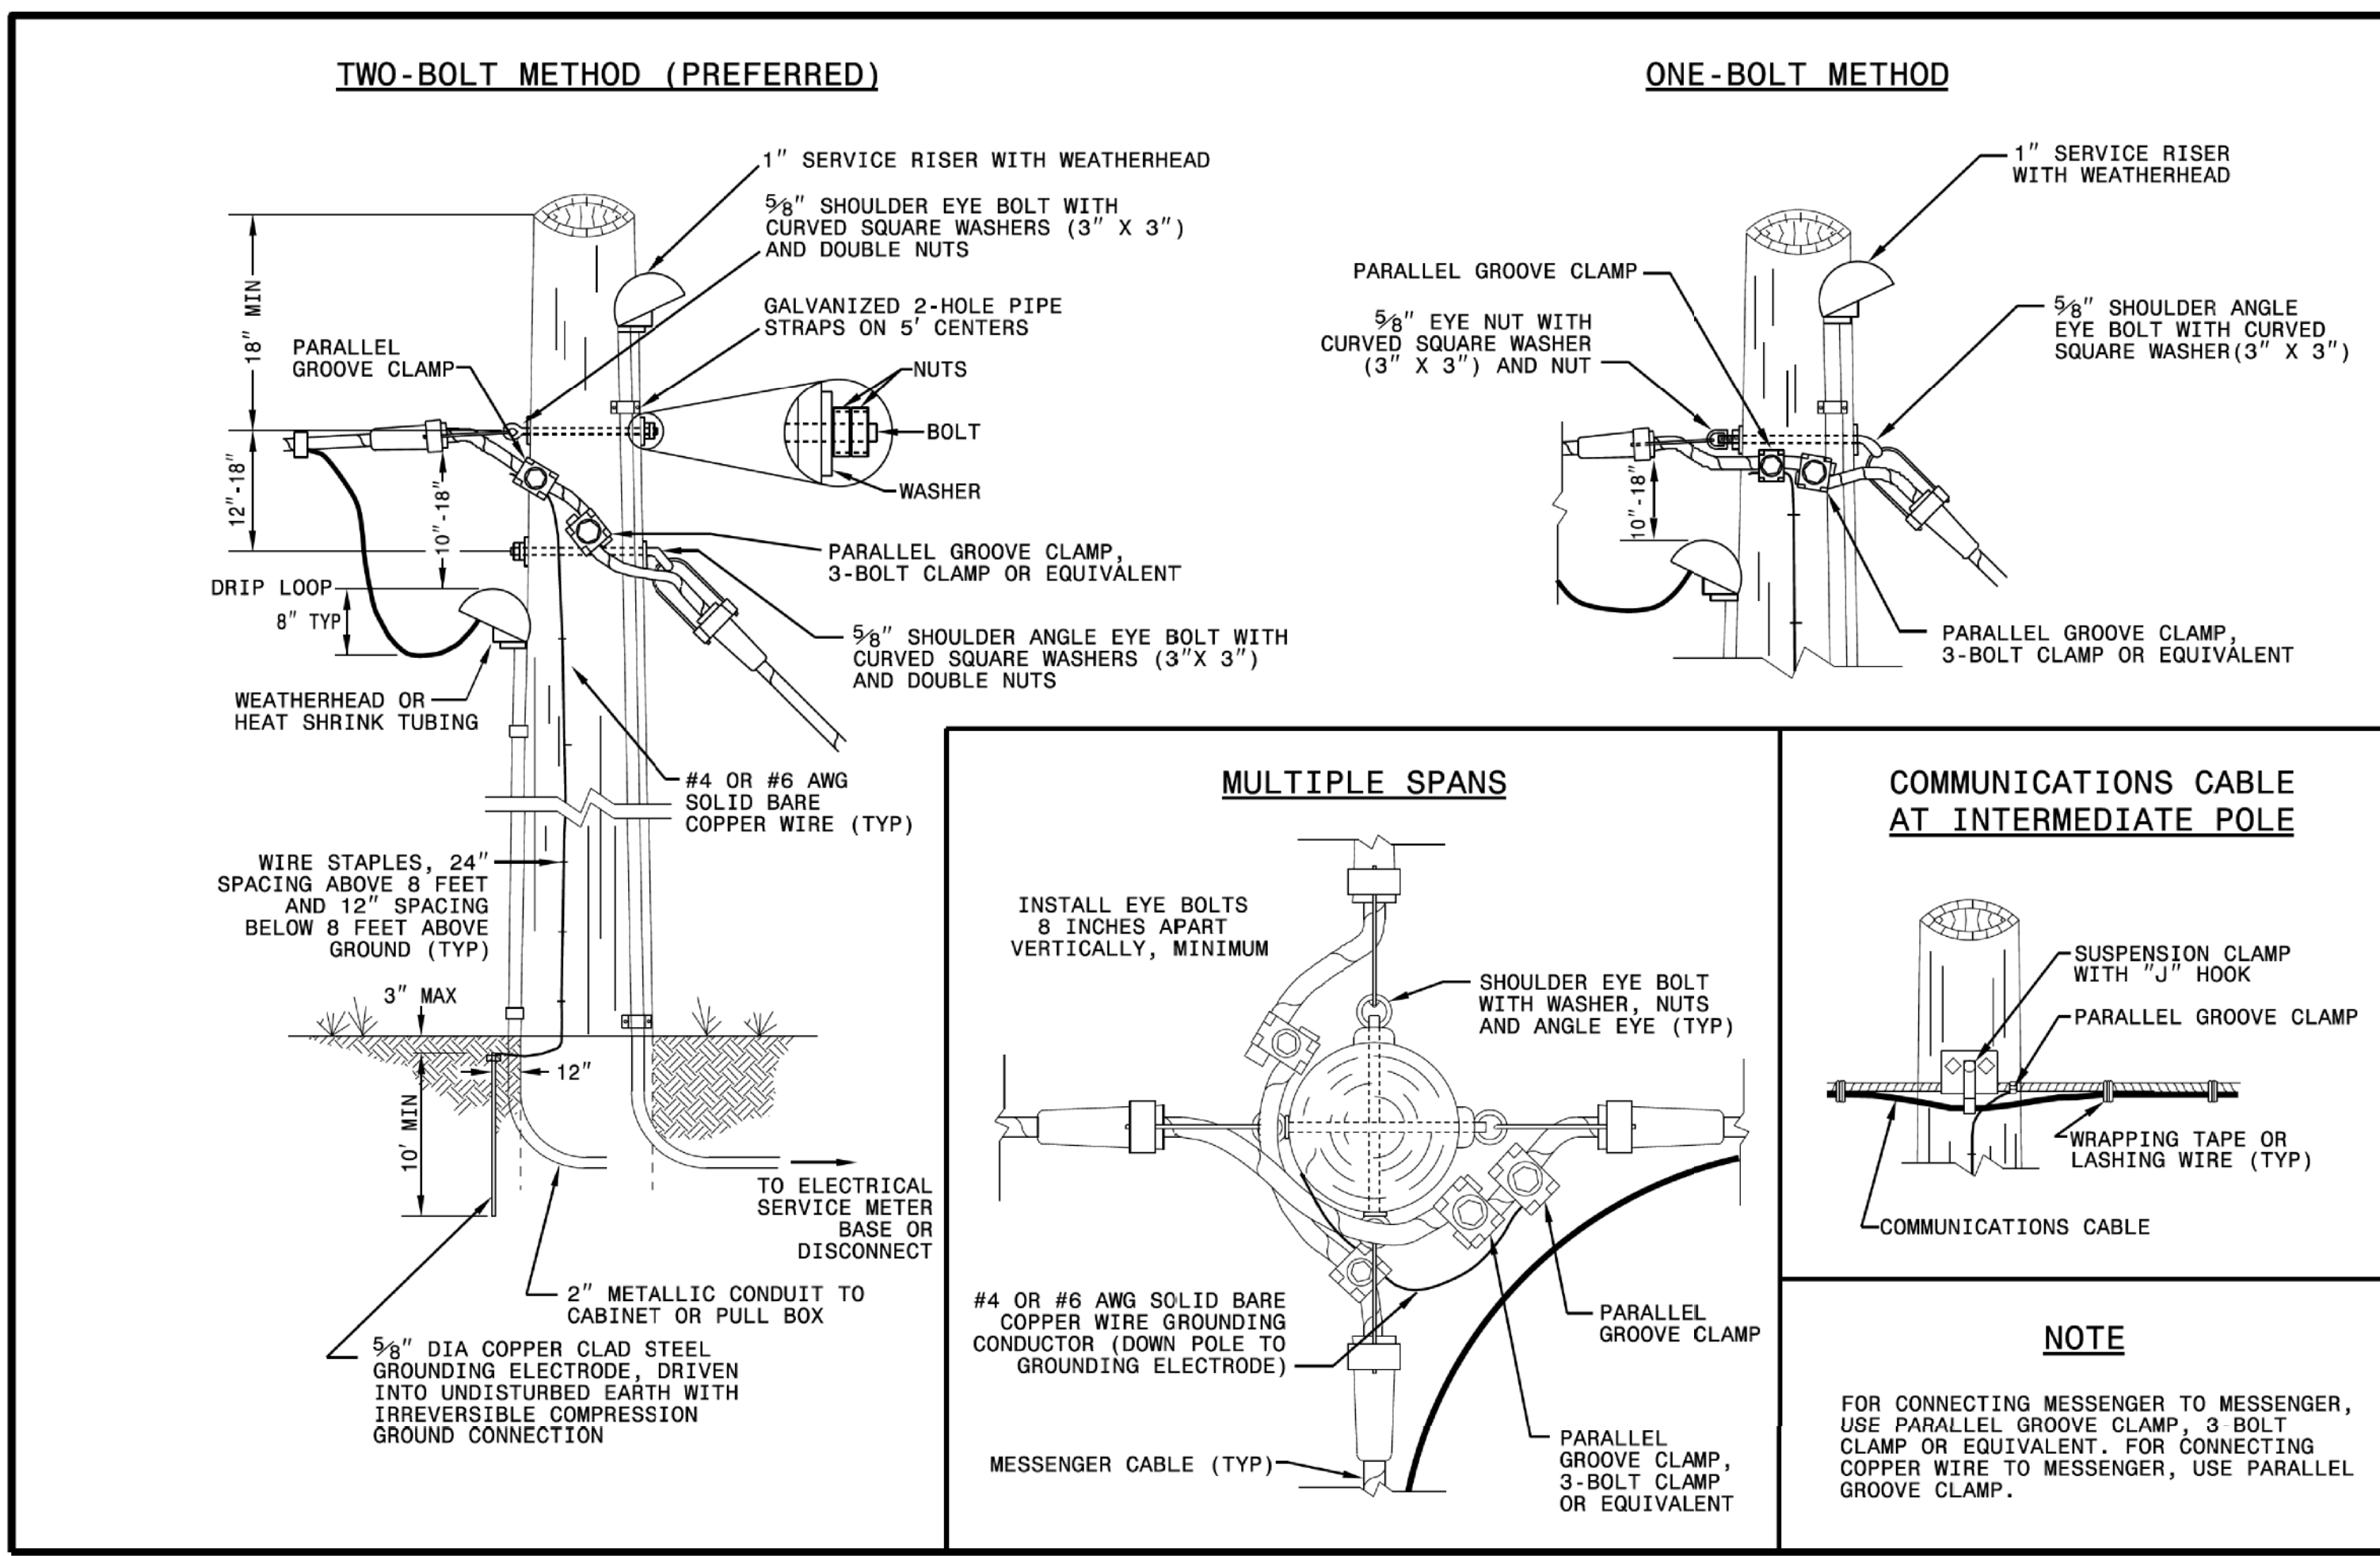

STATE OF NORTH CAROLINA  
DEPT. OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
RALEIGH, N. C.

1-18

ENGLISH STANDARD DRAWING FOR

**WOOD POLES**  
METHODS OF ATTACHMENT AND GROUNDING

SHEET 1 OF 1  
**1720D01**

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

See Plate for Title

Prepared in the Offices of:

Department of Transportation  
Mobility and Safety Division  
ITS & Signals Unit

SEAL

SEAL  
032108  
ENGINEER  
MOHD A. ASLAMI


8500 Bldg 0388495

750 N. Greenfield Parkway  
Garner, NC 27529


DocuSigned by:  
Mohd Aslami

10/11/2017  
DATE


11-2017-2017\_08-55  
11-2018\_51d DocuSignWP:Plate\_Sheets#018\_Plate\_Sheet.dgn  
rwhough

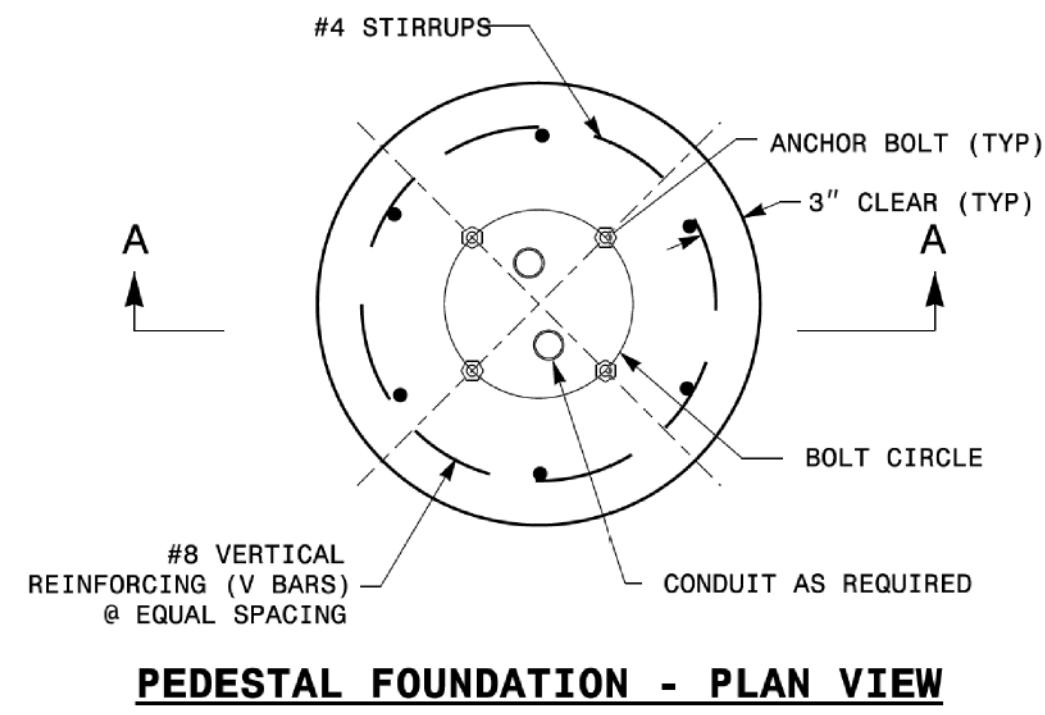


PEDESTAL FOUNDATION - PLAN VIEW

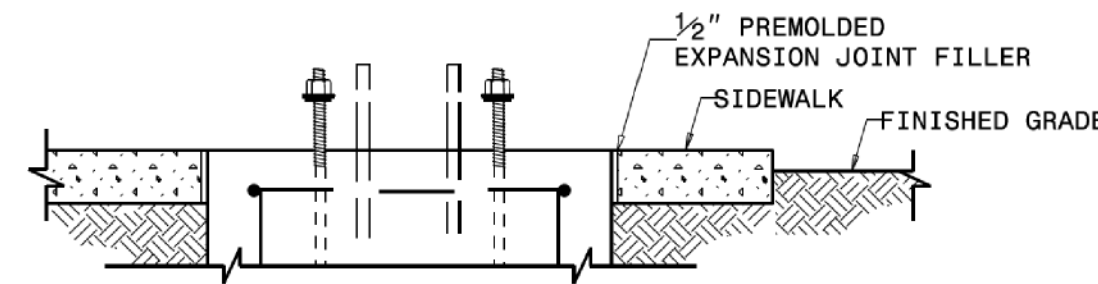


PEDESTAL FOUNDATION DETAILS FOR SIDEWALK

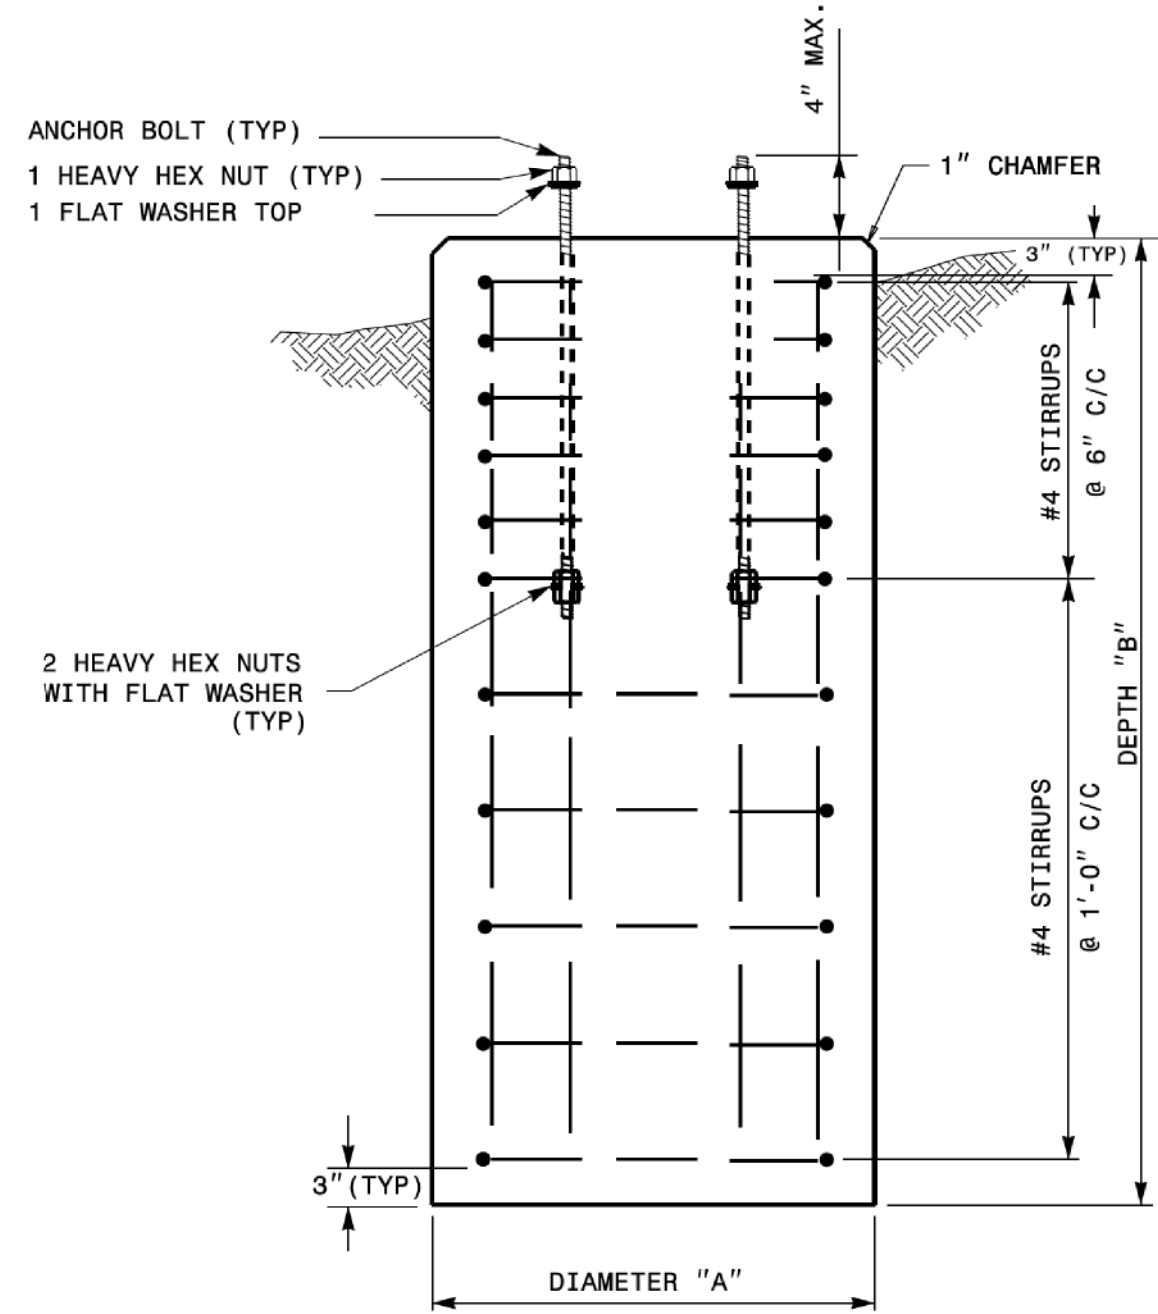


TYPES I, II & III SECTION A-A

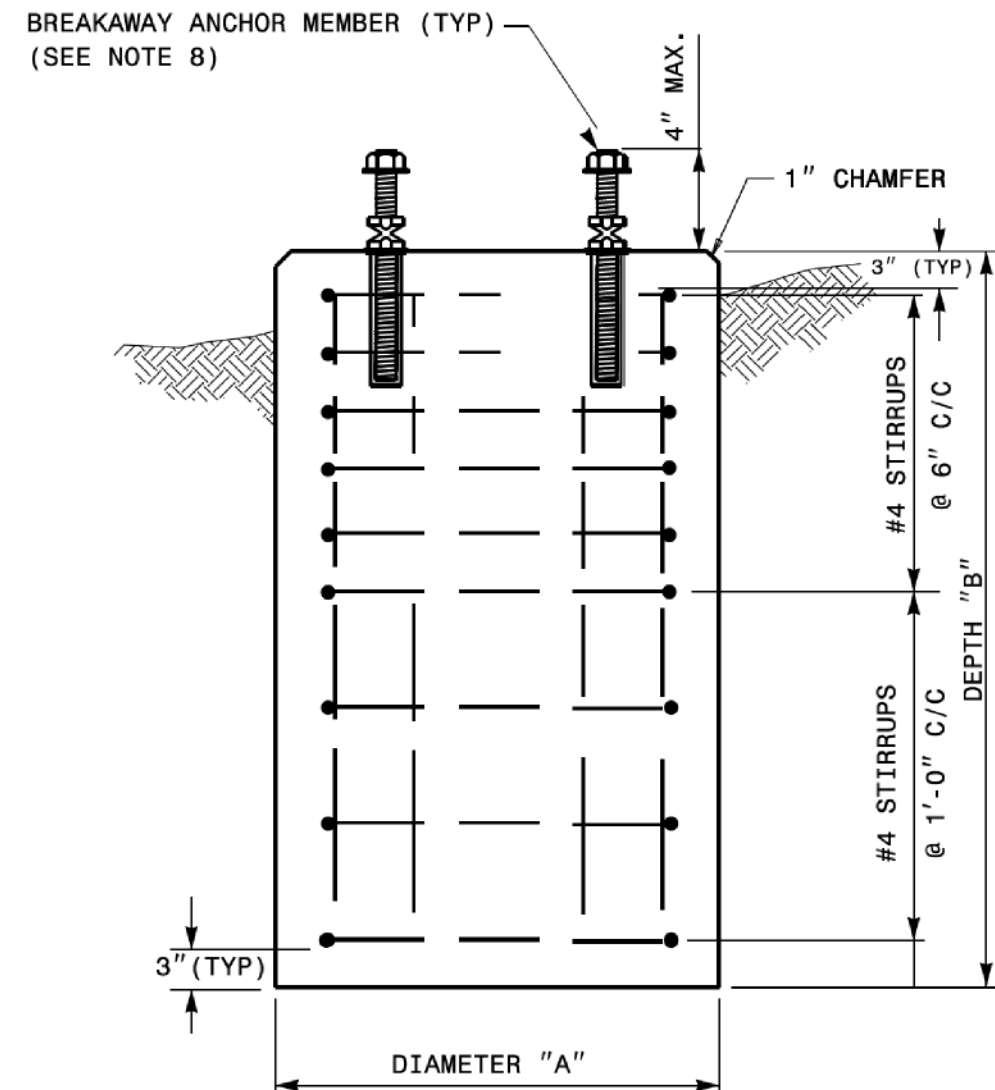

TYPES I & II ONLY SECTION A-A

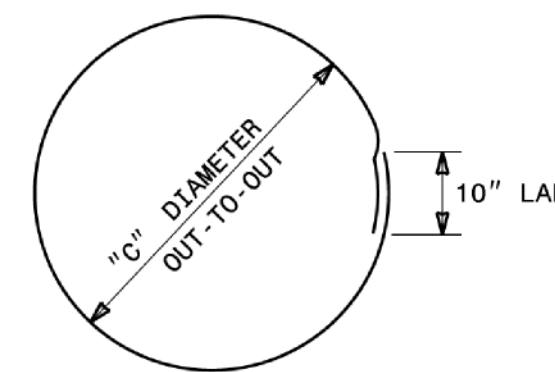

CLOSED HOOPS

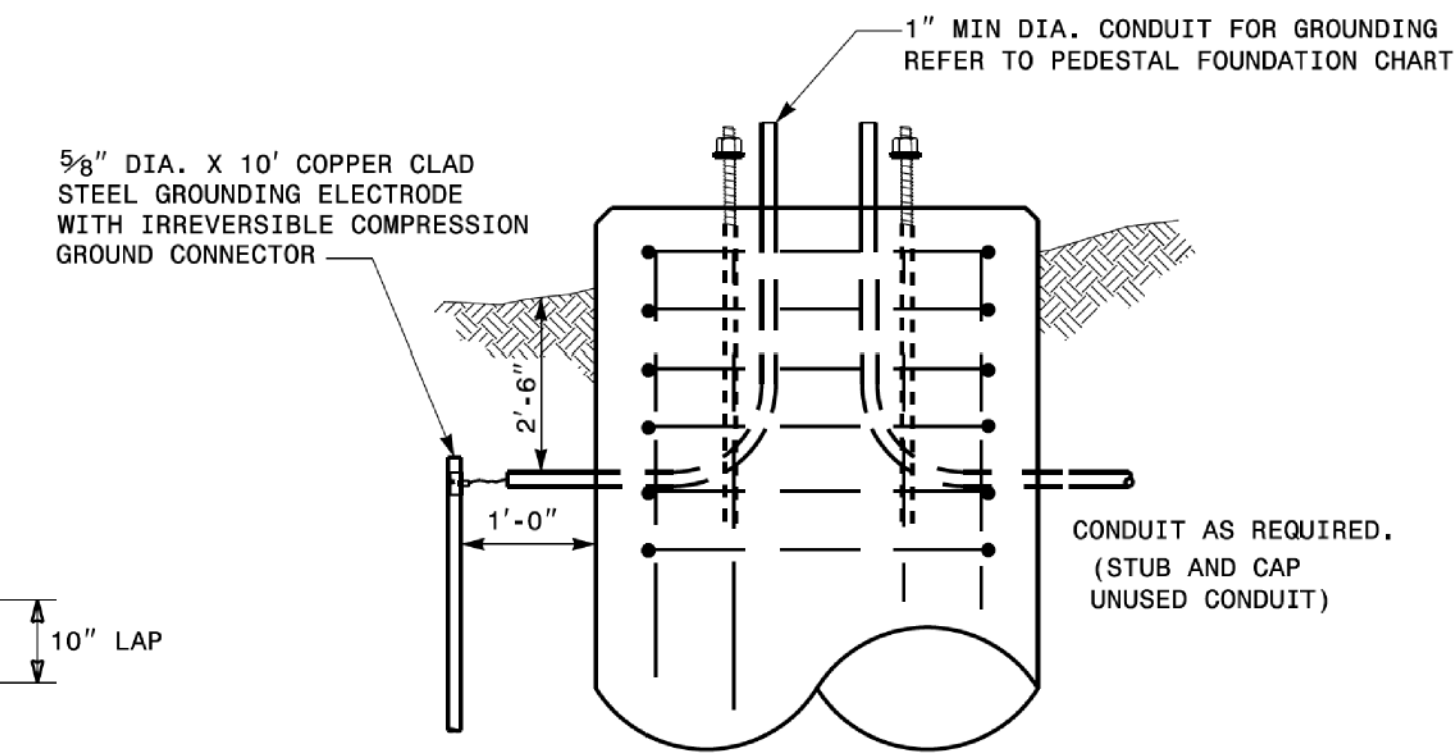

GROUNDING & CONDUIT DETAIL

**NOTES:**

1. CAST FOUNDATION AGAINST UNDISTURBED SOIL WHEREVER CONDITIONS PERMIT. IN UNSTABLE SOIL, CAST-IN-PLACE TUBE FORMS ARE ALLOWED WITH APPROVAL.
2. COMPLY WITH APPLICABLE PROVISIONS OF SECTION 825 FOR CONCRETE CONSTRUCTION.
3. USE CLASS "A" CONCRETE THAT MEETS THE REQUIREMENTS OF SECTION 1000 WITH A COMPRESSION STRENGTH AT 28 DAYS OF  $F'_c = 3000$  PSI (MIN.).
4. USE ASTM GRADE 60 DEFORMED BARS FOR ALL REINFORCING STEEL.
5. GRADE IS ASSUMED TO BE (8H:1V) OR FLATTER. FOUNDATION SIZE AND DEPTHS ARE BASED ON THE FOLLOWING SOIL DESIGN PARAMETERS:
  - A. SANDY TYPE SOIL
  - B. NO GROUND WATER WITHIN 5'-0" OF SURFACE ELEVATION
  - C. WIND SPEED NOT TO EXCEED 140 MPH
 IF ACTUAL CONDITIONS VARY SUBSTANTIALLY FROM THOSE ASSUMED, THE FOUNDATION DEPTH MAY BE ADJUSTED. IN THIS CASE, CONTACT THE ENGINEER.
6. MAINTAIN AT LEAST 3" COVER ON ALL REINFORCEMENT.
7. ORIENT CONDUIT AS REQUIRED BY THE DESIGN OR AS DICTATED BY FIELD CONDITIONS.
8. USE ADHESIVE ANCHOR FOR THREADED COUPLING INSERT. FOR TYPE I MINIMUM DEPTH NECESSARY IS 0'-4 1/2" AND FOR TYPE II MINIMUM DEPTH NECESSARY IS 0'-6 5/8". FOLLOW MANUFACTURER'S INSTALLATION INSTRUCTIONS.

PEDESTAL FOUNDATION TYPE AND SIZE							
TYPE	PEDESTAL DESCRIPTION	SIZE			ANCHOR BOLT		INSTALL GROUNDING SYSTEM (YES/NO)
		DIAMETER "A" FT	DEPTH "B" FT	CONCRETE VOLUME CY	DIAMETER (MIN.) IN	LENGTH FT-IN	
I	PEDESTRIAN PUSHBUTTON	2'-0"	3'-6"	.41	1/2	1'-6"	NO
II	NORMAL-DUTY	2'-0"	5'-0"	.58	3/4	2'-0"	YES
III	HEAVY-DUTY	2'-6"	7'-0"	1.27	1	4'-0"	YES

REINFORCING STEEL SCHEDULE													
TYPE	V-BAR				STIRRUP								
	SIZE #	QTY	LENGTH	WEIGHT LBS	SIZE #	QUANTITY			LENGTH	DIAMETER "C" FT	OVERLAP MIN.	WEIGHT LBS	TOTAL STEEL WEIGHT LBS
						ON 6" CENTERS	ON 12" CENTERS	TOTAL					
I	8	6	3'-0"	56	4	0	4	4	5'-7"	1'-6"	0'-10"	15	71
II	8	6	4'-6"	86	4	5	3	8	5'-7"	1'-6"	0'-10"	30	116
III	8	6	6'-6"	122	4	7	4	11	7'-2"	2'-0"	0'-10"	53	175



SHEET 1 OF 1  
**1743D01**

STATE OF NORTH CAROLINA  
 DEPT. OF TRANSPORTATION  
 DIVISION OF HIGHWAYS  
 RALEIGH, N.C.  
 ENGLISH STANDARD DRAWING FOR  
**PEDESTALS**  
 FOUNDATIONS

11-2017-2017 09/03  
 U:\2018\_Sig Dwg\Drawings\Plate Sheets\018\_Plate Sheet -dgn  
 r:\dough

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED


See Plate for Title

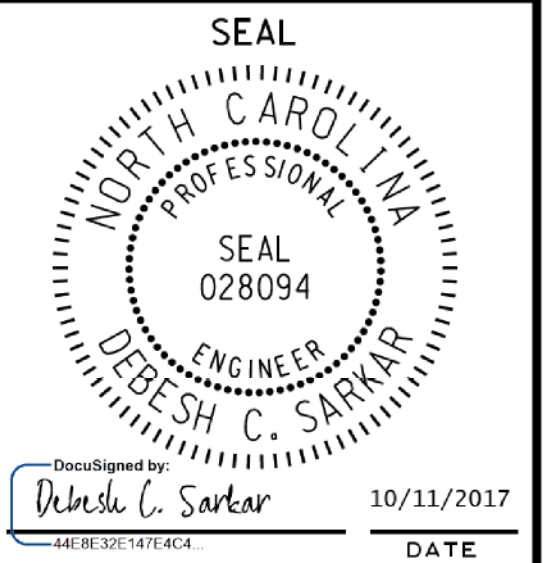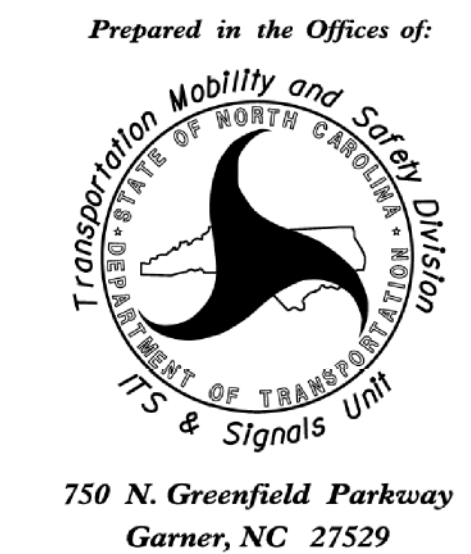

# STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

PROJECT I.D. NO.	SHEET NO.
R-5812	Sig.M1

## STANDARD DRAWINGS FOR ALL METAL POLES

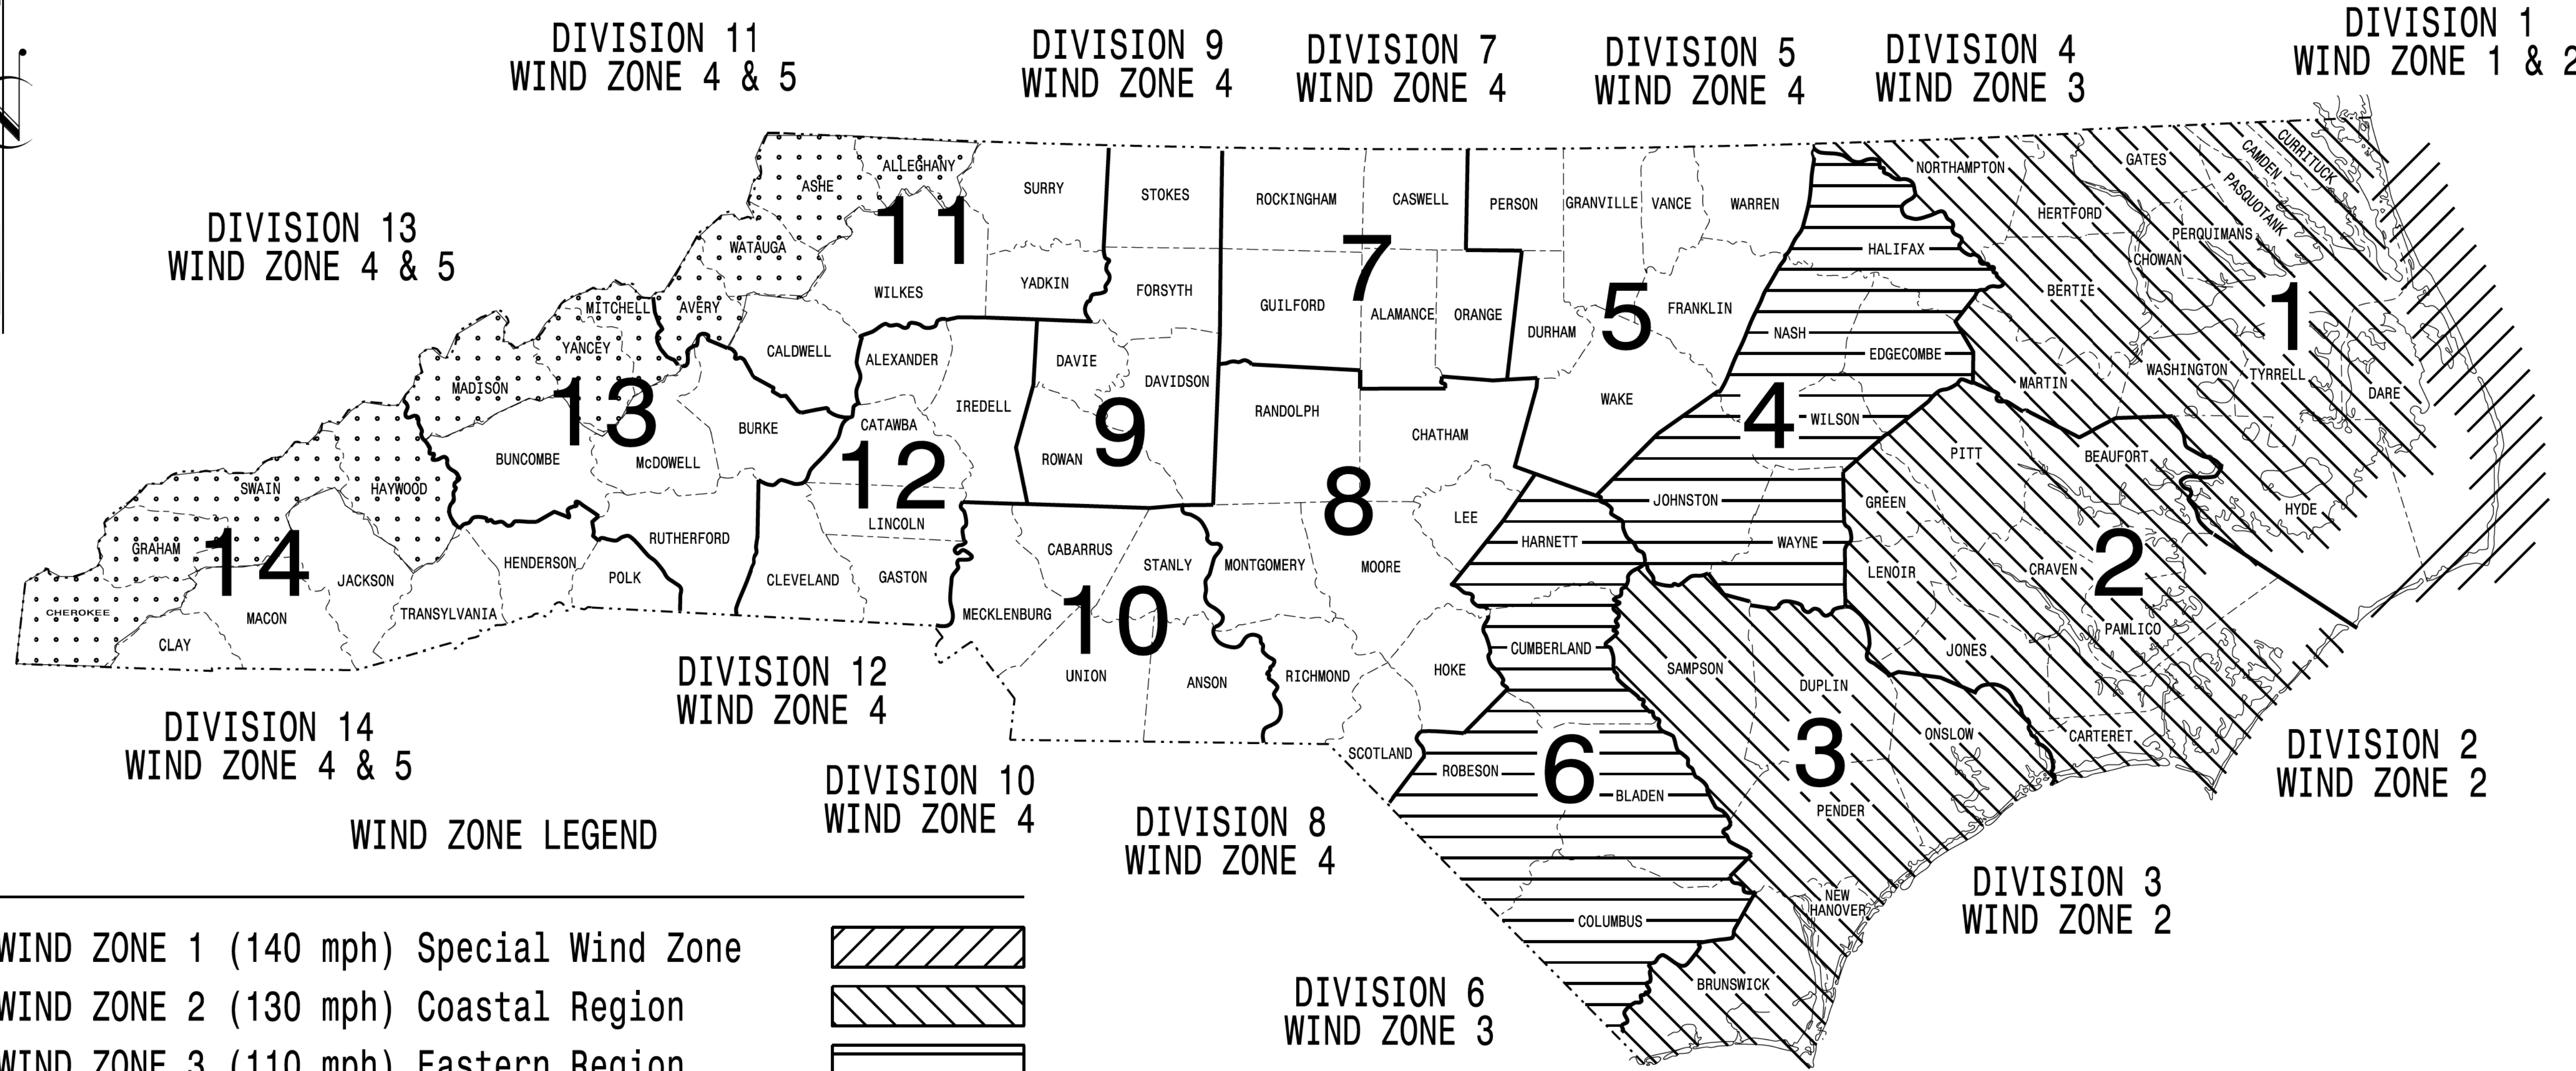


**WIND ZONE LEGEND**

WIND ZONE 1 (140 mph) Special Wind Zone	
WIND ZONE 2 (130 mph) Coastal Region	
WIND ZONE 3 (110 mph) Eastern Region	
WIND ZONE 4 (90 mph) Central & Mtn. Region	
WIND ZONE 5 (120 mph) Special Wind Zone	

<https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

Prepared In the Offices of:

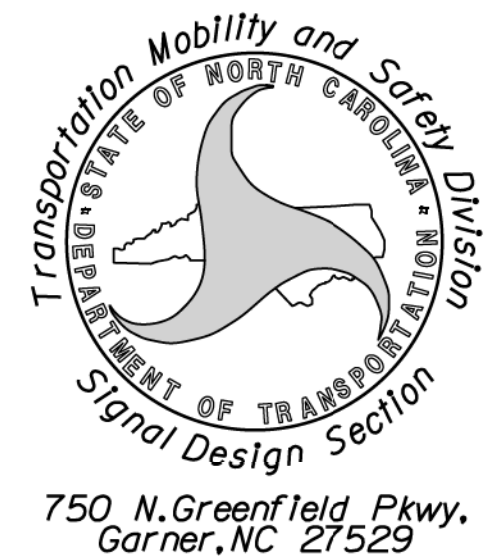

Designed in conformance  
with the latest  
2015 Interim to the  
6th Edition 2013  
**AASHTO**  
Standard Specifications for  
Structural Supports for  
Highway Signs, Luminaires,  
and Traffic Signals

DRAWING NUMBER	DESCRIPTION
Sig. M 1	Statewide Wind Zone Map
Sig. M 2	Typical Fabrication Details-All Metal Poles
Sig. M 3	Typical Fabrication Details-Strain Poles
Sig. M 4	Typical Fabrication Details-Mast Arm Poles
Sig. M 5	Typical Fabrication Details-Mast Arm Connection
Sig. M 6	Typical Fabrication Details-Strain Pole Attachments
Sig. M 7	Construction Details-Foundations
Sig. M 8	Standard Strain Pole Foundation-All Soil Conditions

**NCDOT CONTACTS:**

**MOBILITY AND SAFETY DIVISION - ITS AND SIGNALS UNIT**

---


M.M. MCDIARMID, P.E. - STATE ITS AND SIGNALS ENGINEER

J. P. GALLOWAY, P.E. - STATE SIGNALS ENGINEER

D.C. SARKAR, P.E. - ITS AND SIGNALS SENIOR STRUCTURAL ENGINEER

SEAL

DocuSigned by:  
Debesh C. Sarkar  
DATE: 10/11/2017

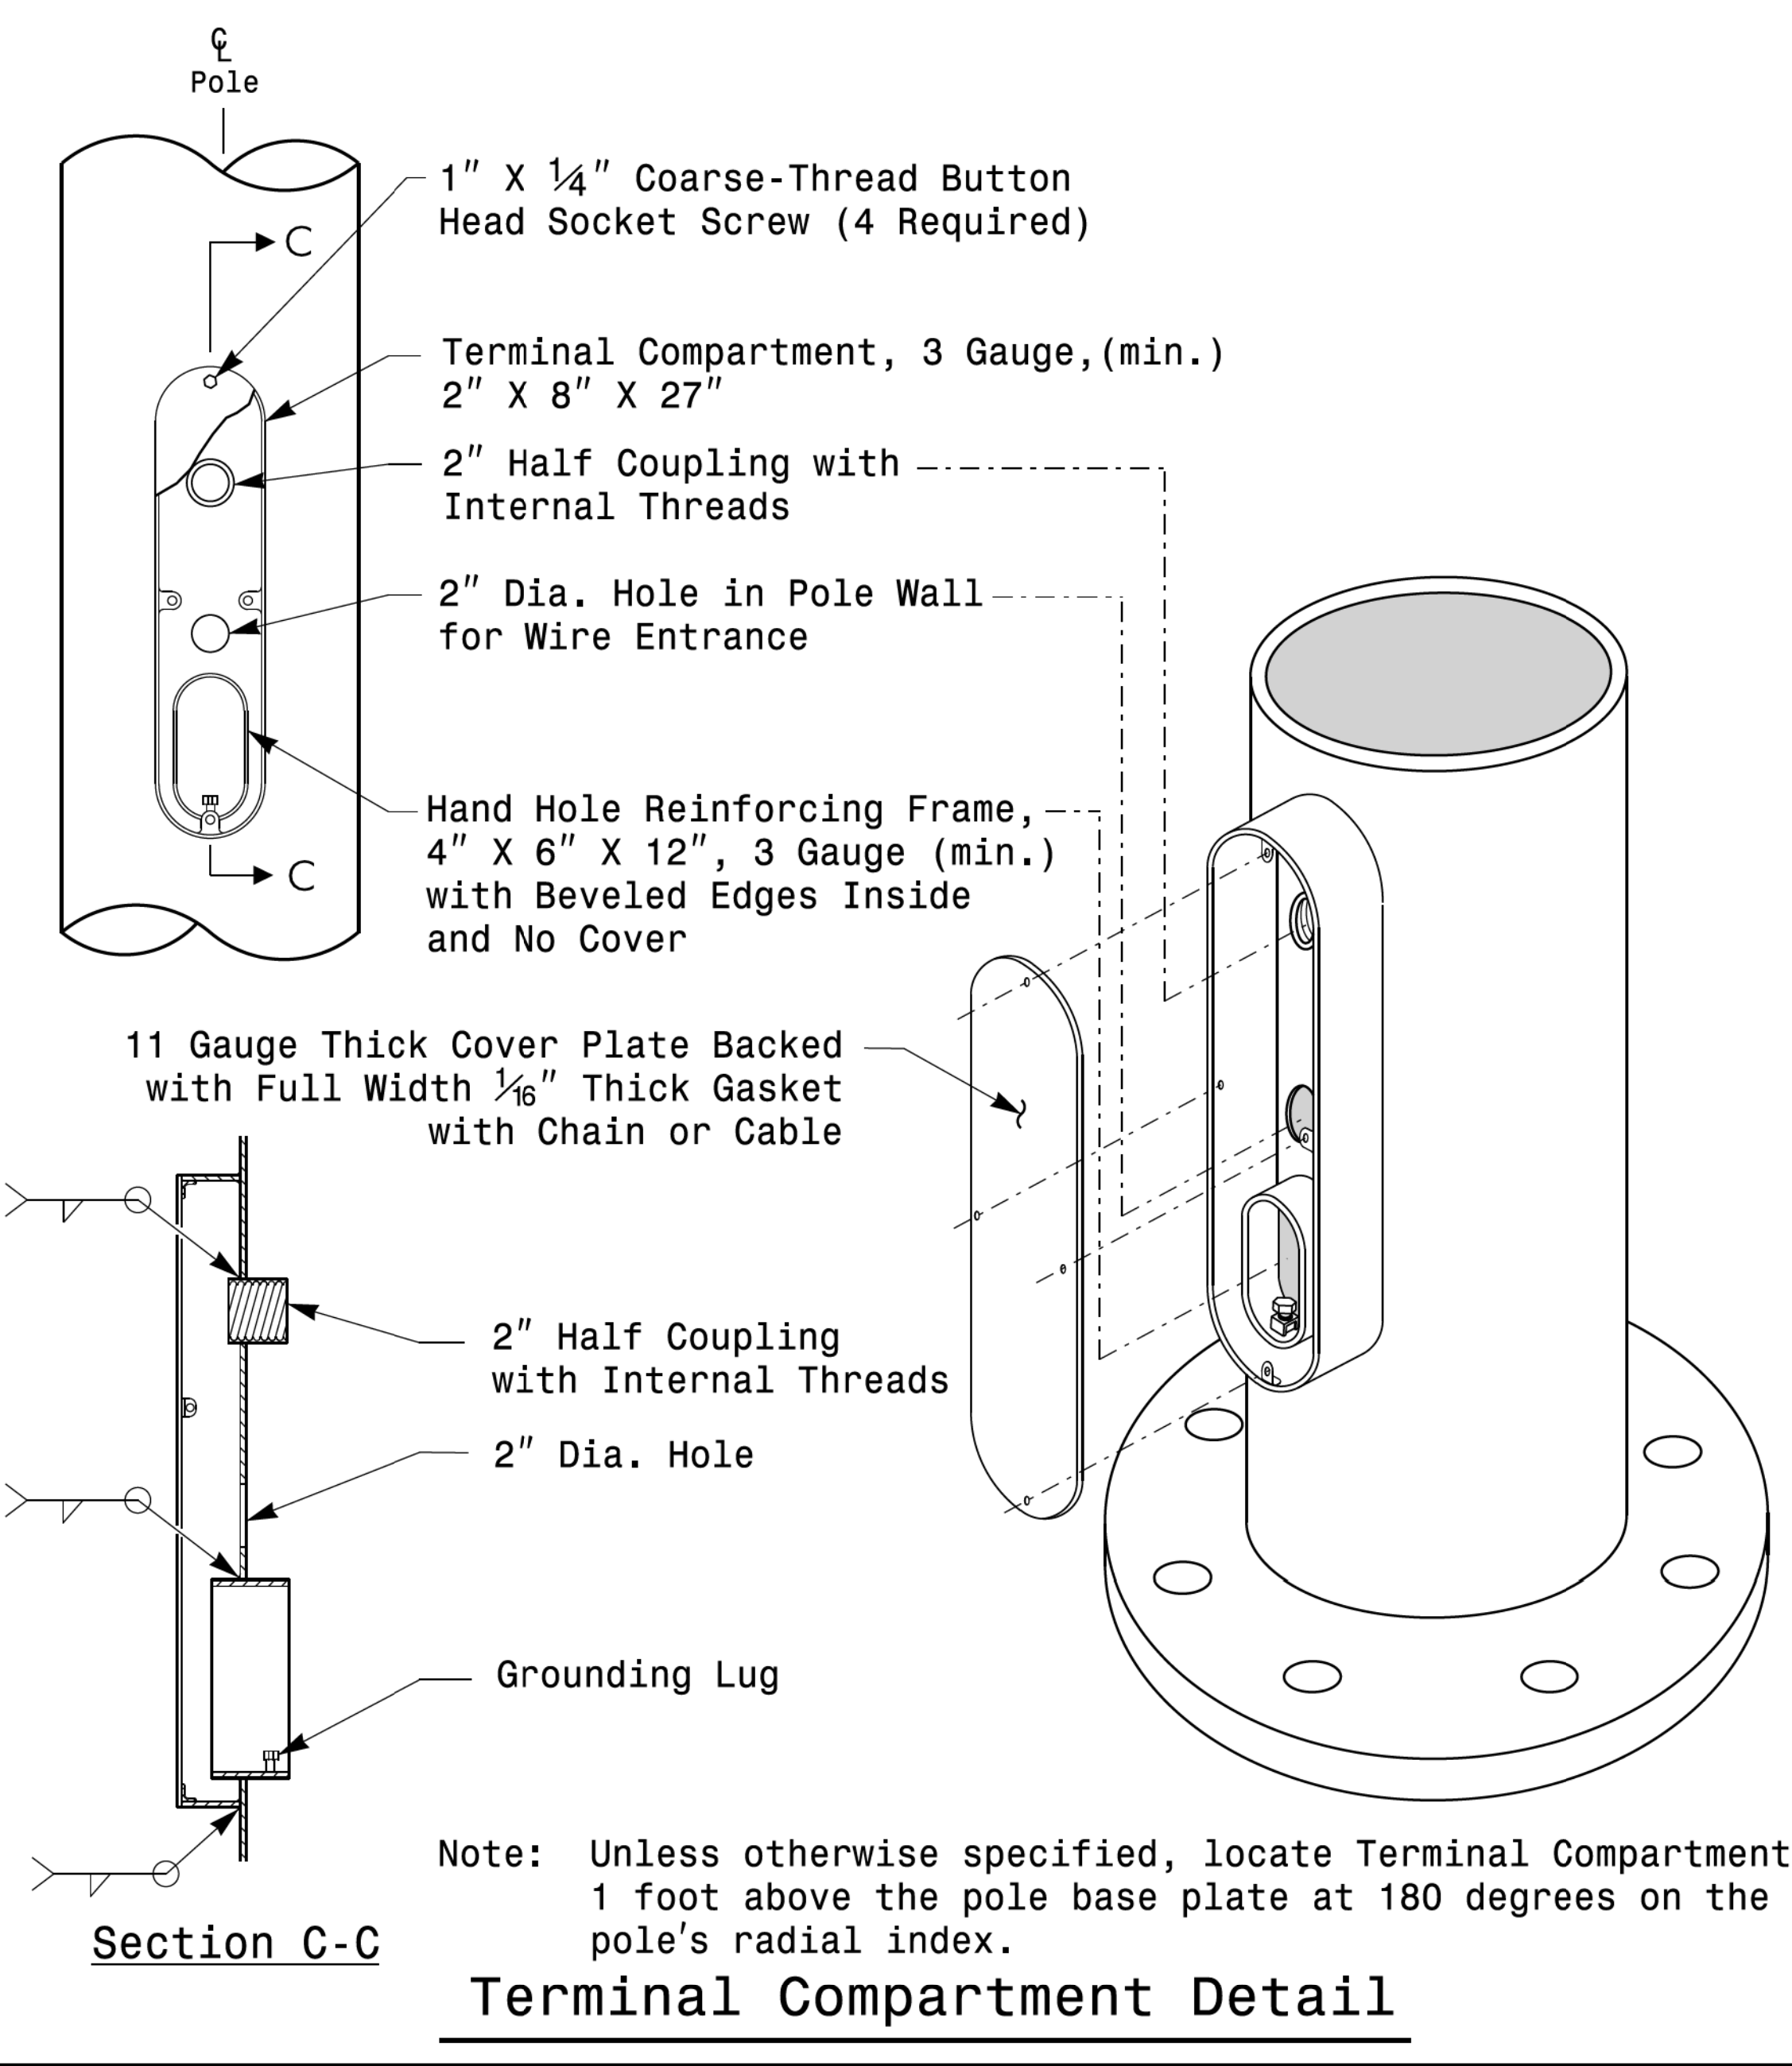

MFG _____ MFG. DATE: MM/YY	MFG _____ MFG. DATE: MM/YY
SHAFT D/T/L/Y _____	SECTION D/T/L/Y _____
ARM-A D/T/L/Y _____	NCDOT SIG. INV. NO. _____
ARM-B D/T/L/Y _____	NCDOT POLE NO. _____
A.B. DIA./B.C./L/Y _____	
NCDOT SIG. INV. NO. _____	
NCDOT POLE NO. _____	


**Arm I.D. Tag**  
(Provide on each section of a multi-section mast arm.)

**Shaft I.D. Tag**  
(Provide on Shaft of Strain Poles and Mast Arm Poles Shaft)

Notes:


- 1) D= Diameter, T= Thickness, L= Length, Y= Yield Strength
- 2) A.B. = Anchor Bolt
- 3) B.C. = Bolt Circle of Anchor Bolts
- 4) If Custom Design, use "NCDOT STANDARD" line for Signal Inv. Number and pole I.D. number
- 5) See drawing M3 and M4 for mounting positions of I.D. tags.

**Identification Tag Details**

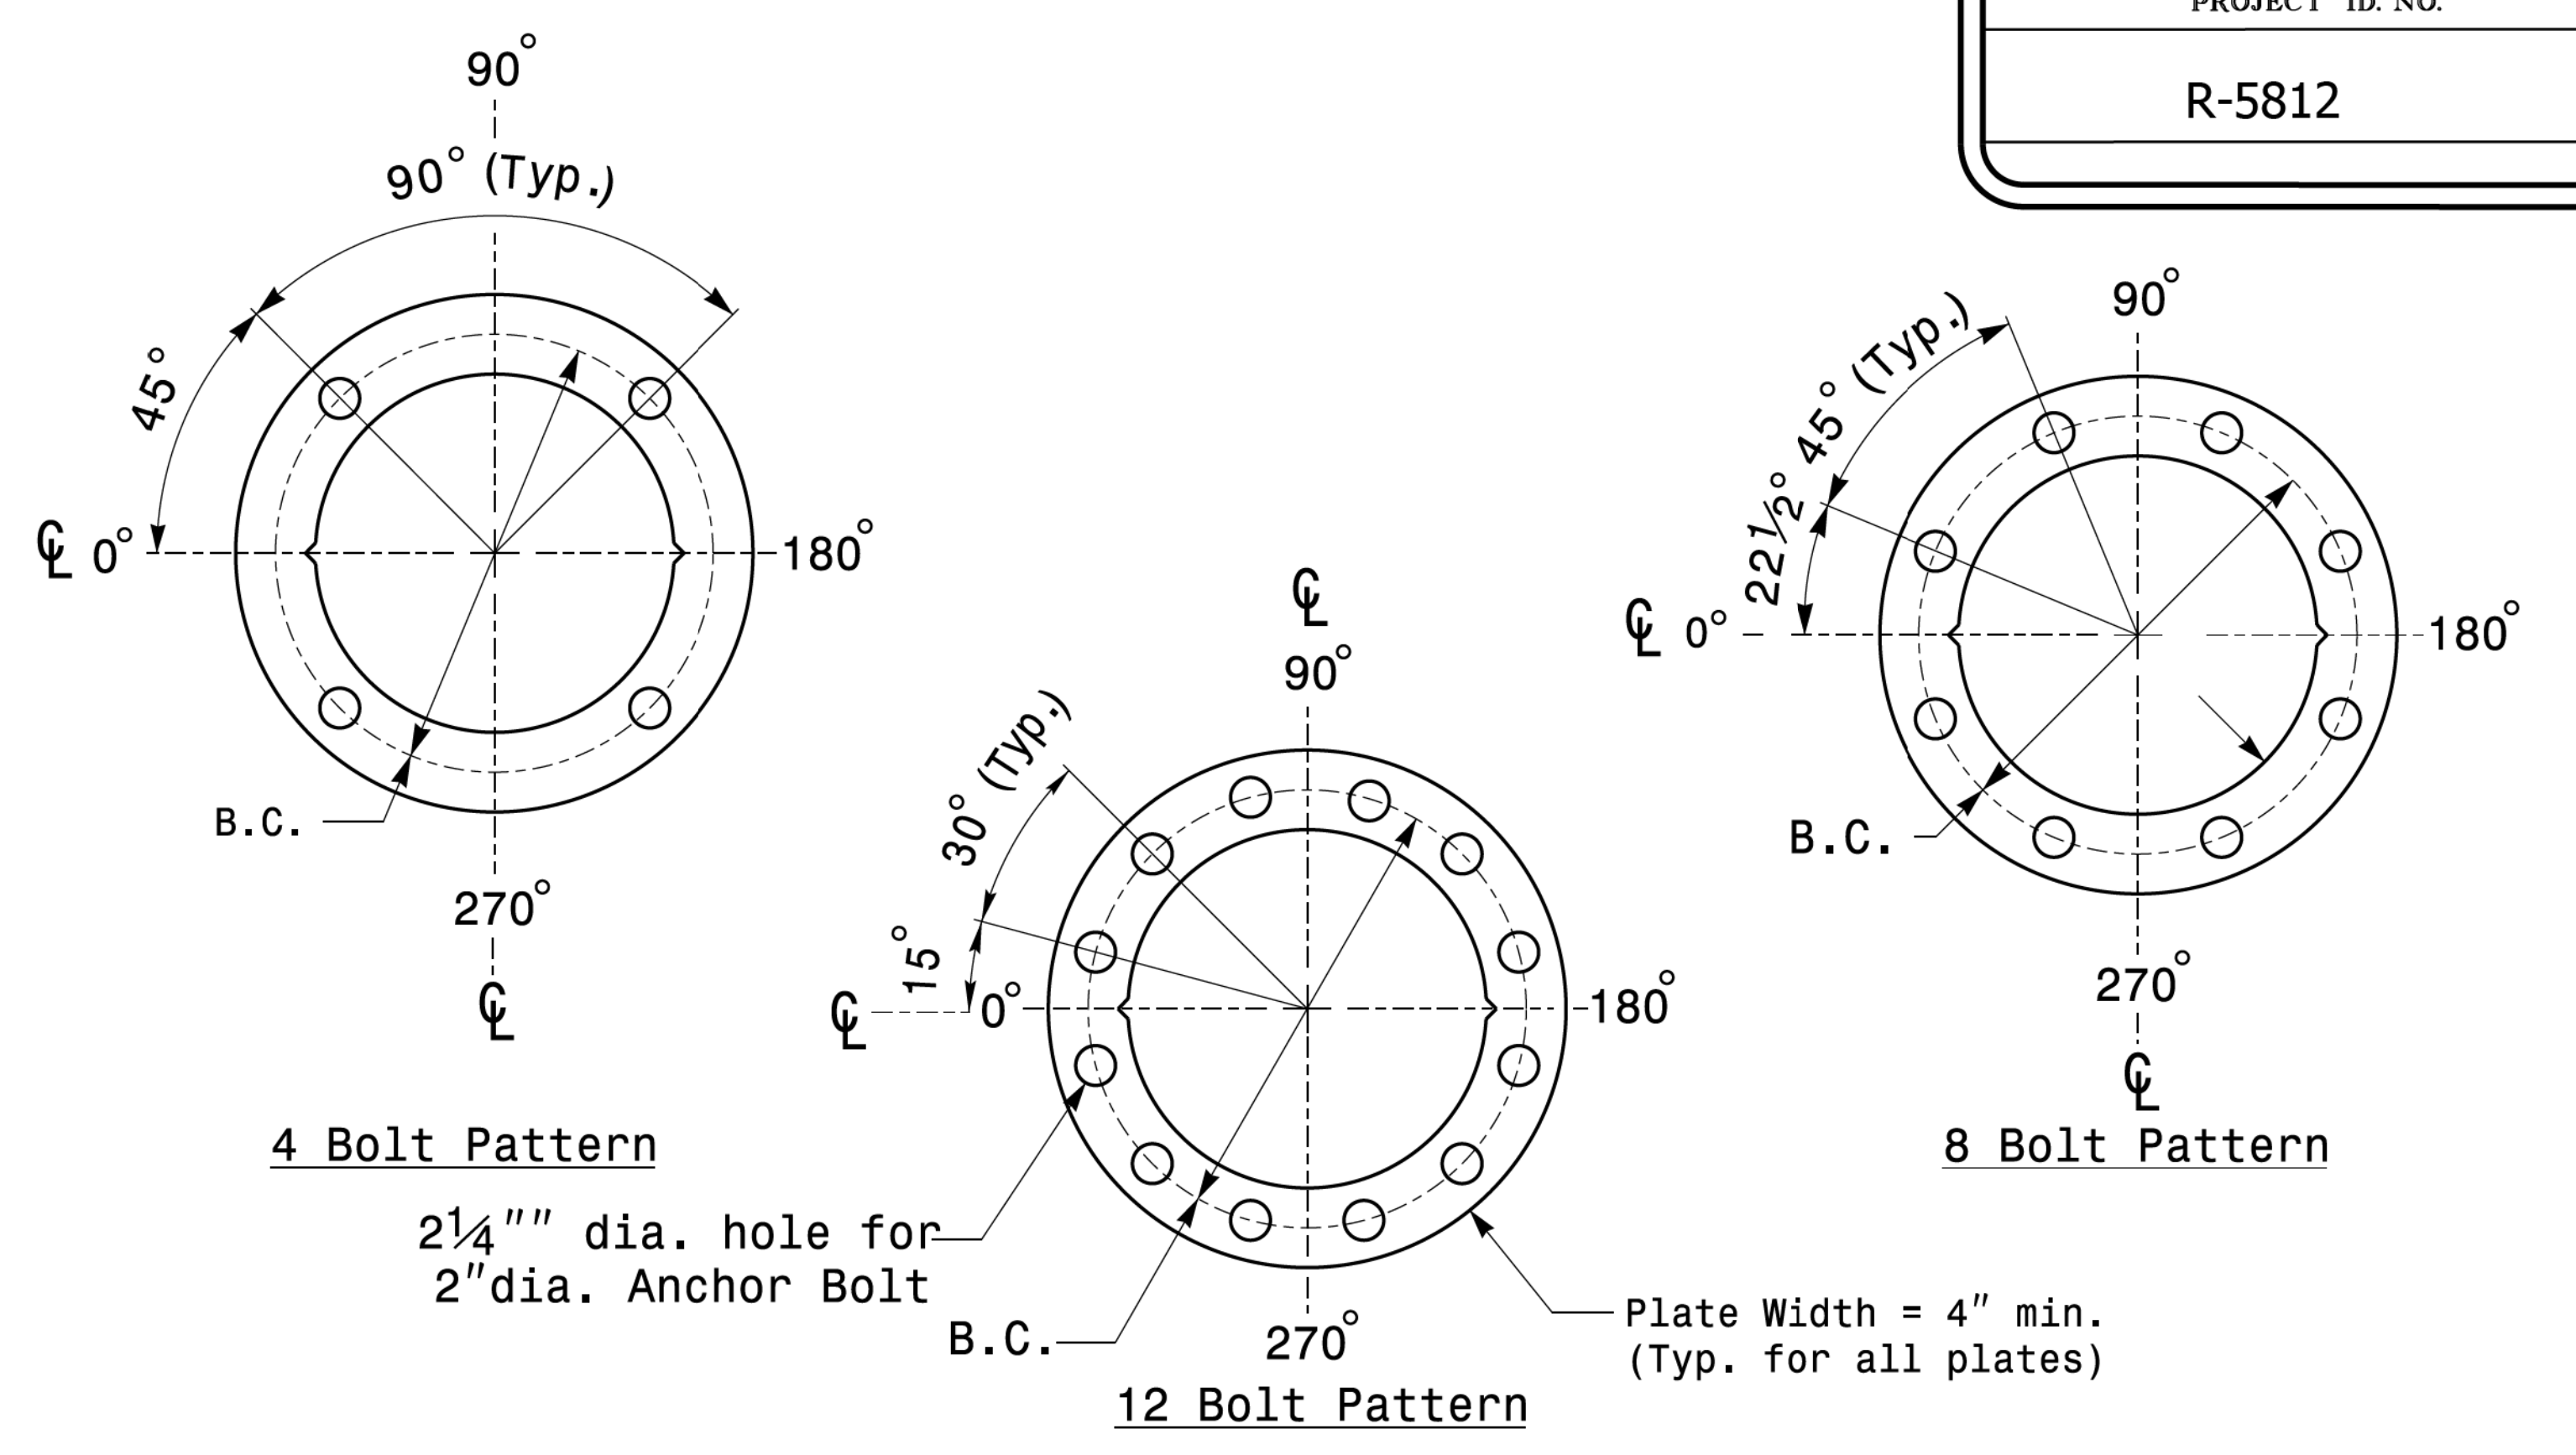


Construct Templates and Plates from 1/4" min. thick Steel. Galvanizing is not required.

**Base Plate Template and Anchor Bolt Lock Plate Details**

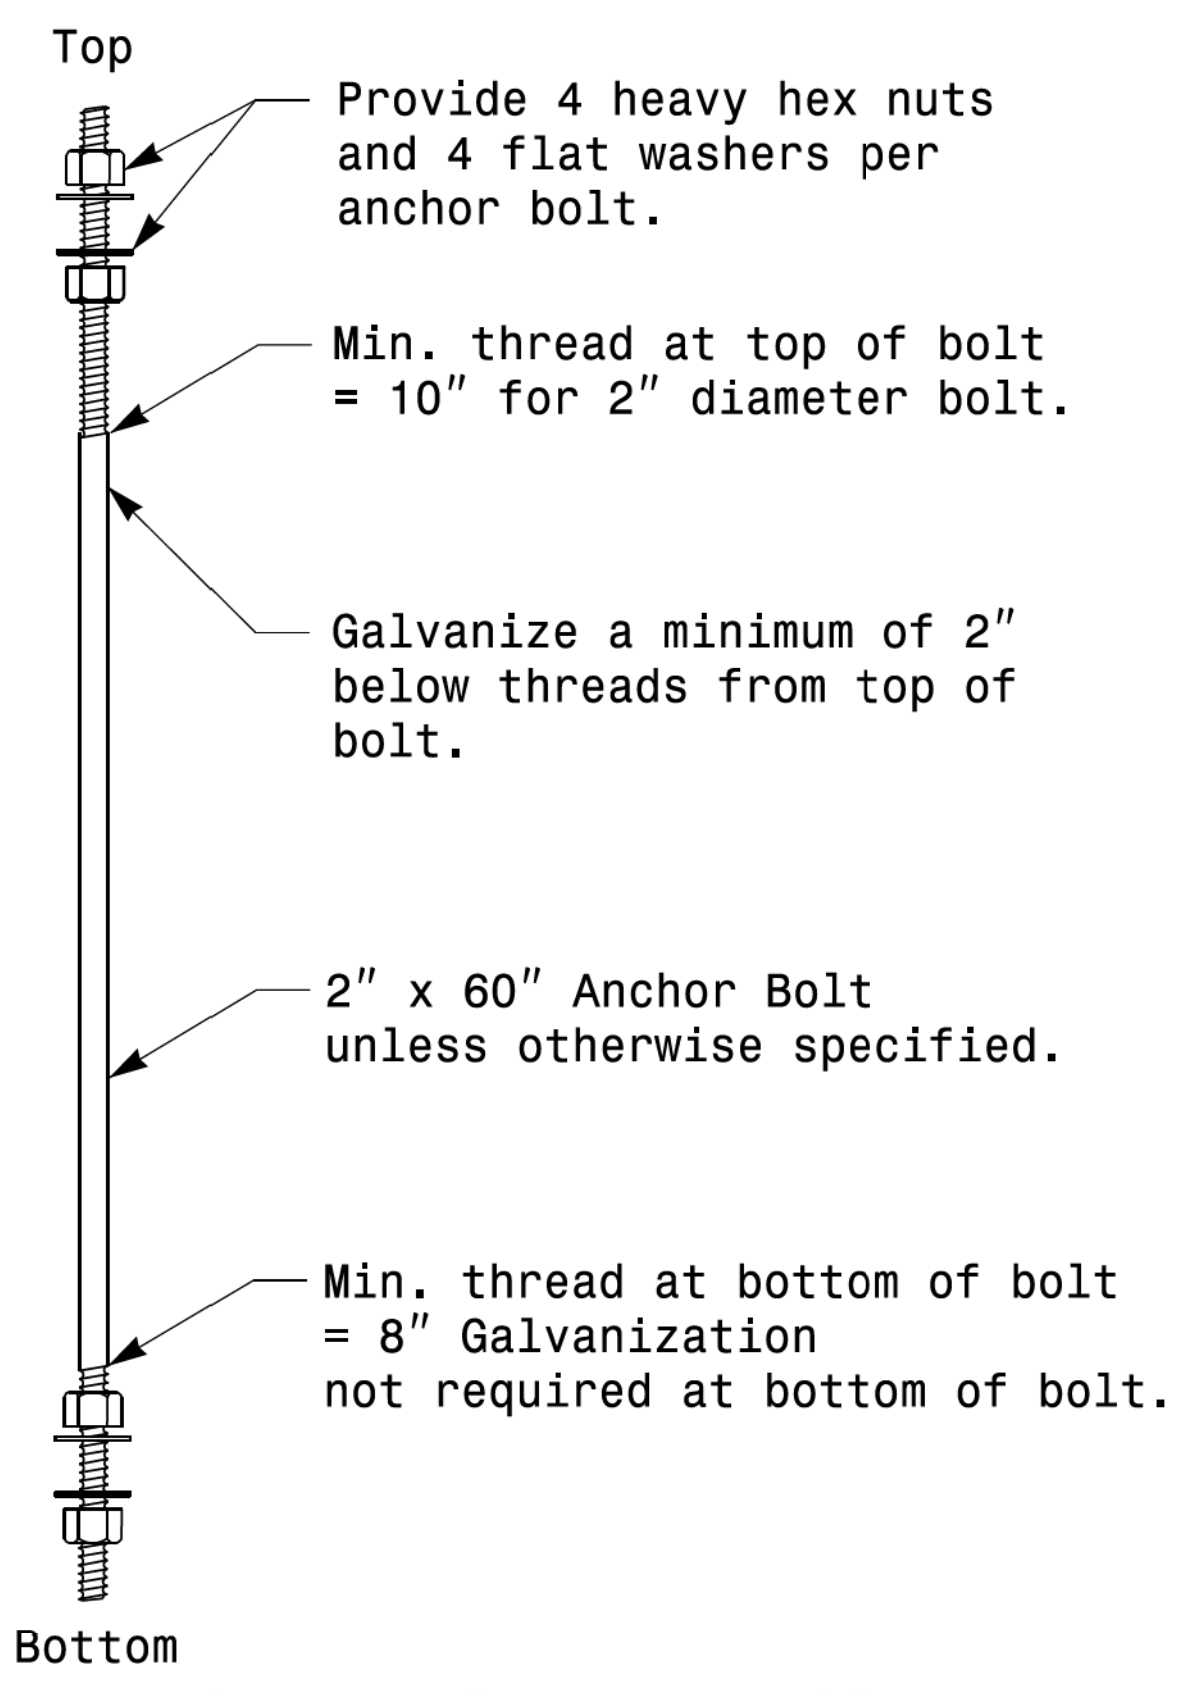

**Anchor Bolt Detail**

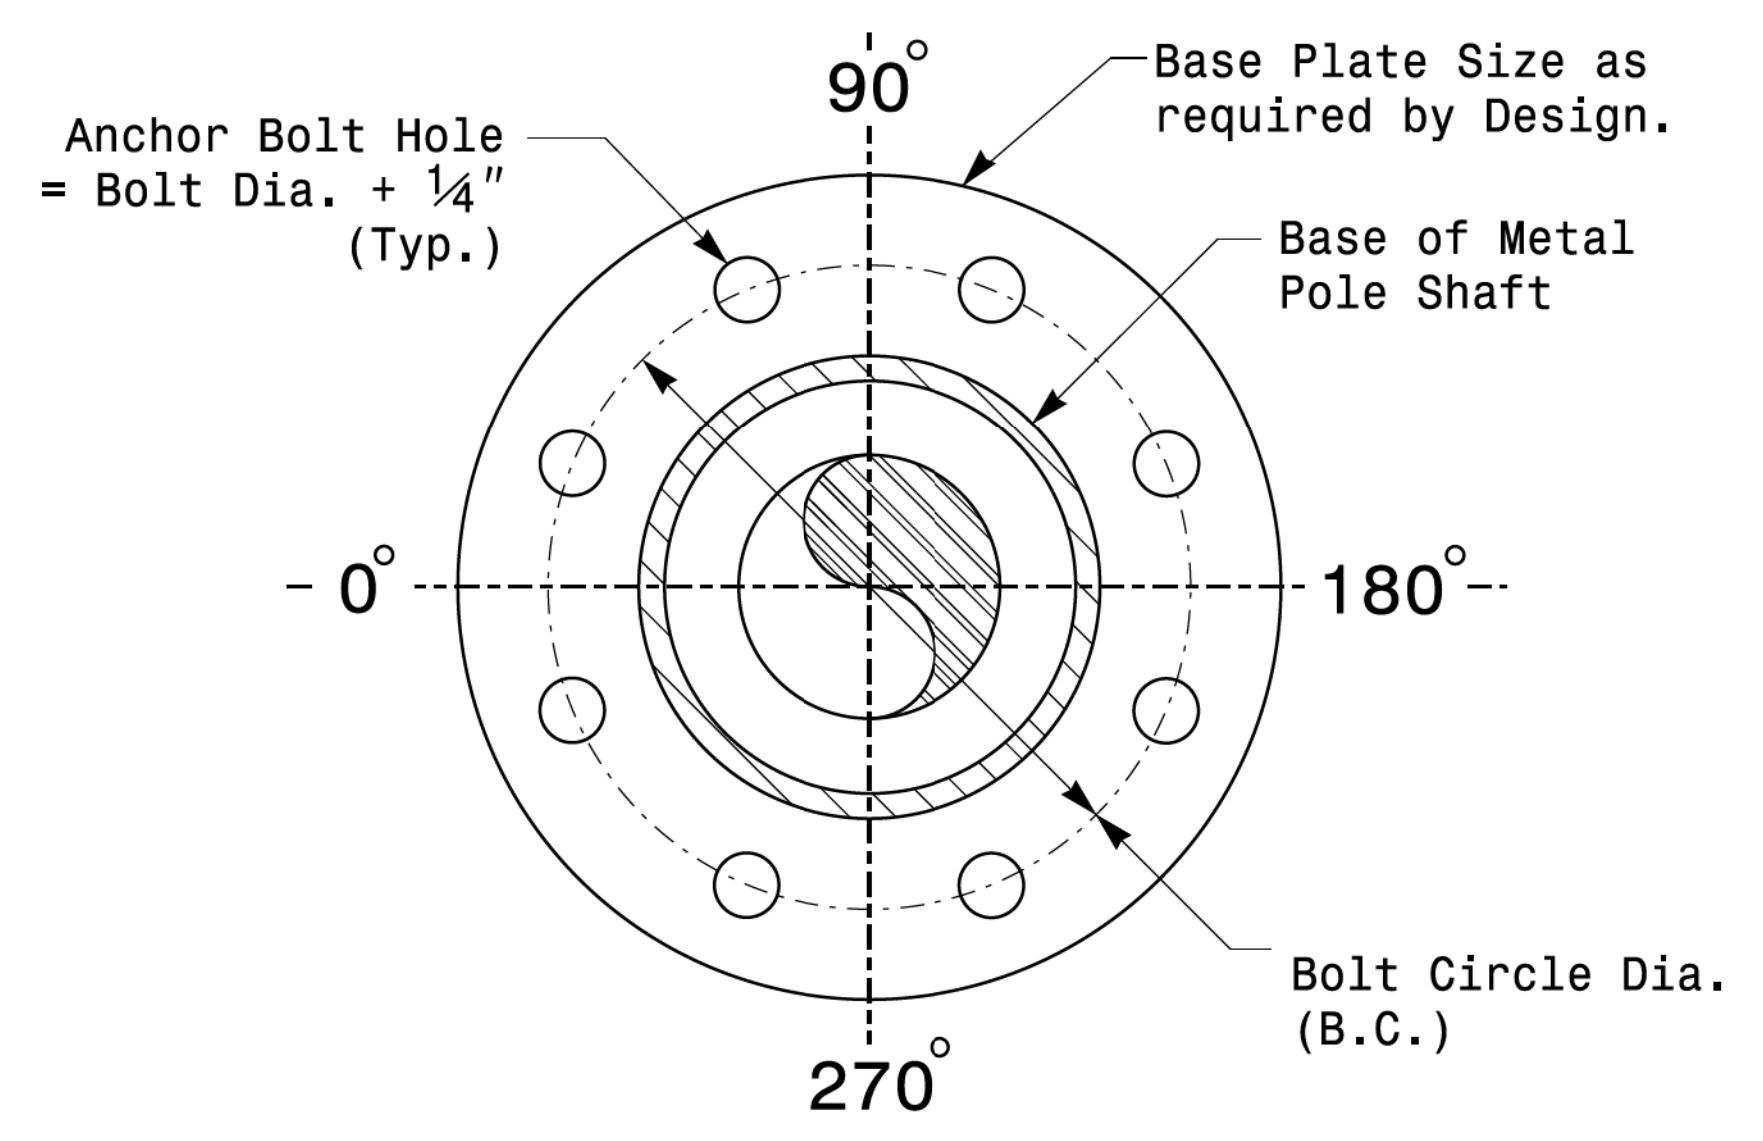

Note: Base plate may be circular, octagonal, square or rectangular in shape.


**Typical Base Plate Detail**

	<b>Typical Fabrication Details For All Metal Poles</b>		
	PLAN DATE: OCTOBER 2017 DESIGNED BY: C.F. ANDREWS PREPARED BY: N. BITTING REVIEWED BY: D.C. SARKAR	REVISIONS INIT. DATE	
SCALE: NONE	750 N. Greenfield Play, Garner, NC 27529		Documented by: <i>D. C. SARKAR</i> DATE: 10/11/2017


11-OCT-2017 08:30 STW:TSO/MS: Signal: Design Section: Eastern Region: Sheets: 2016-2014 Sig. M2 Std. Fabrication Detail: Is-All Poles.dgn





Note:  
 1. Opening in pole base plate shall be equal to pole base inside diameter minus 3 1/2" but shall not be less than 8 1/2".

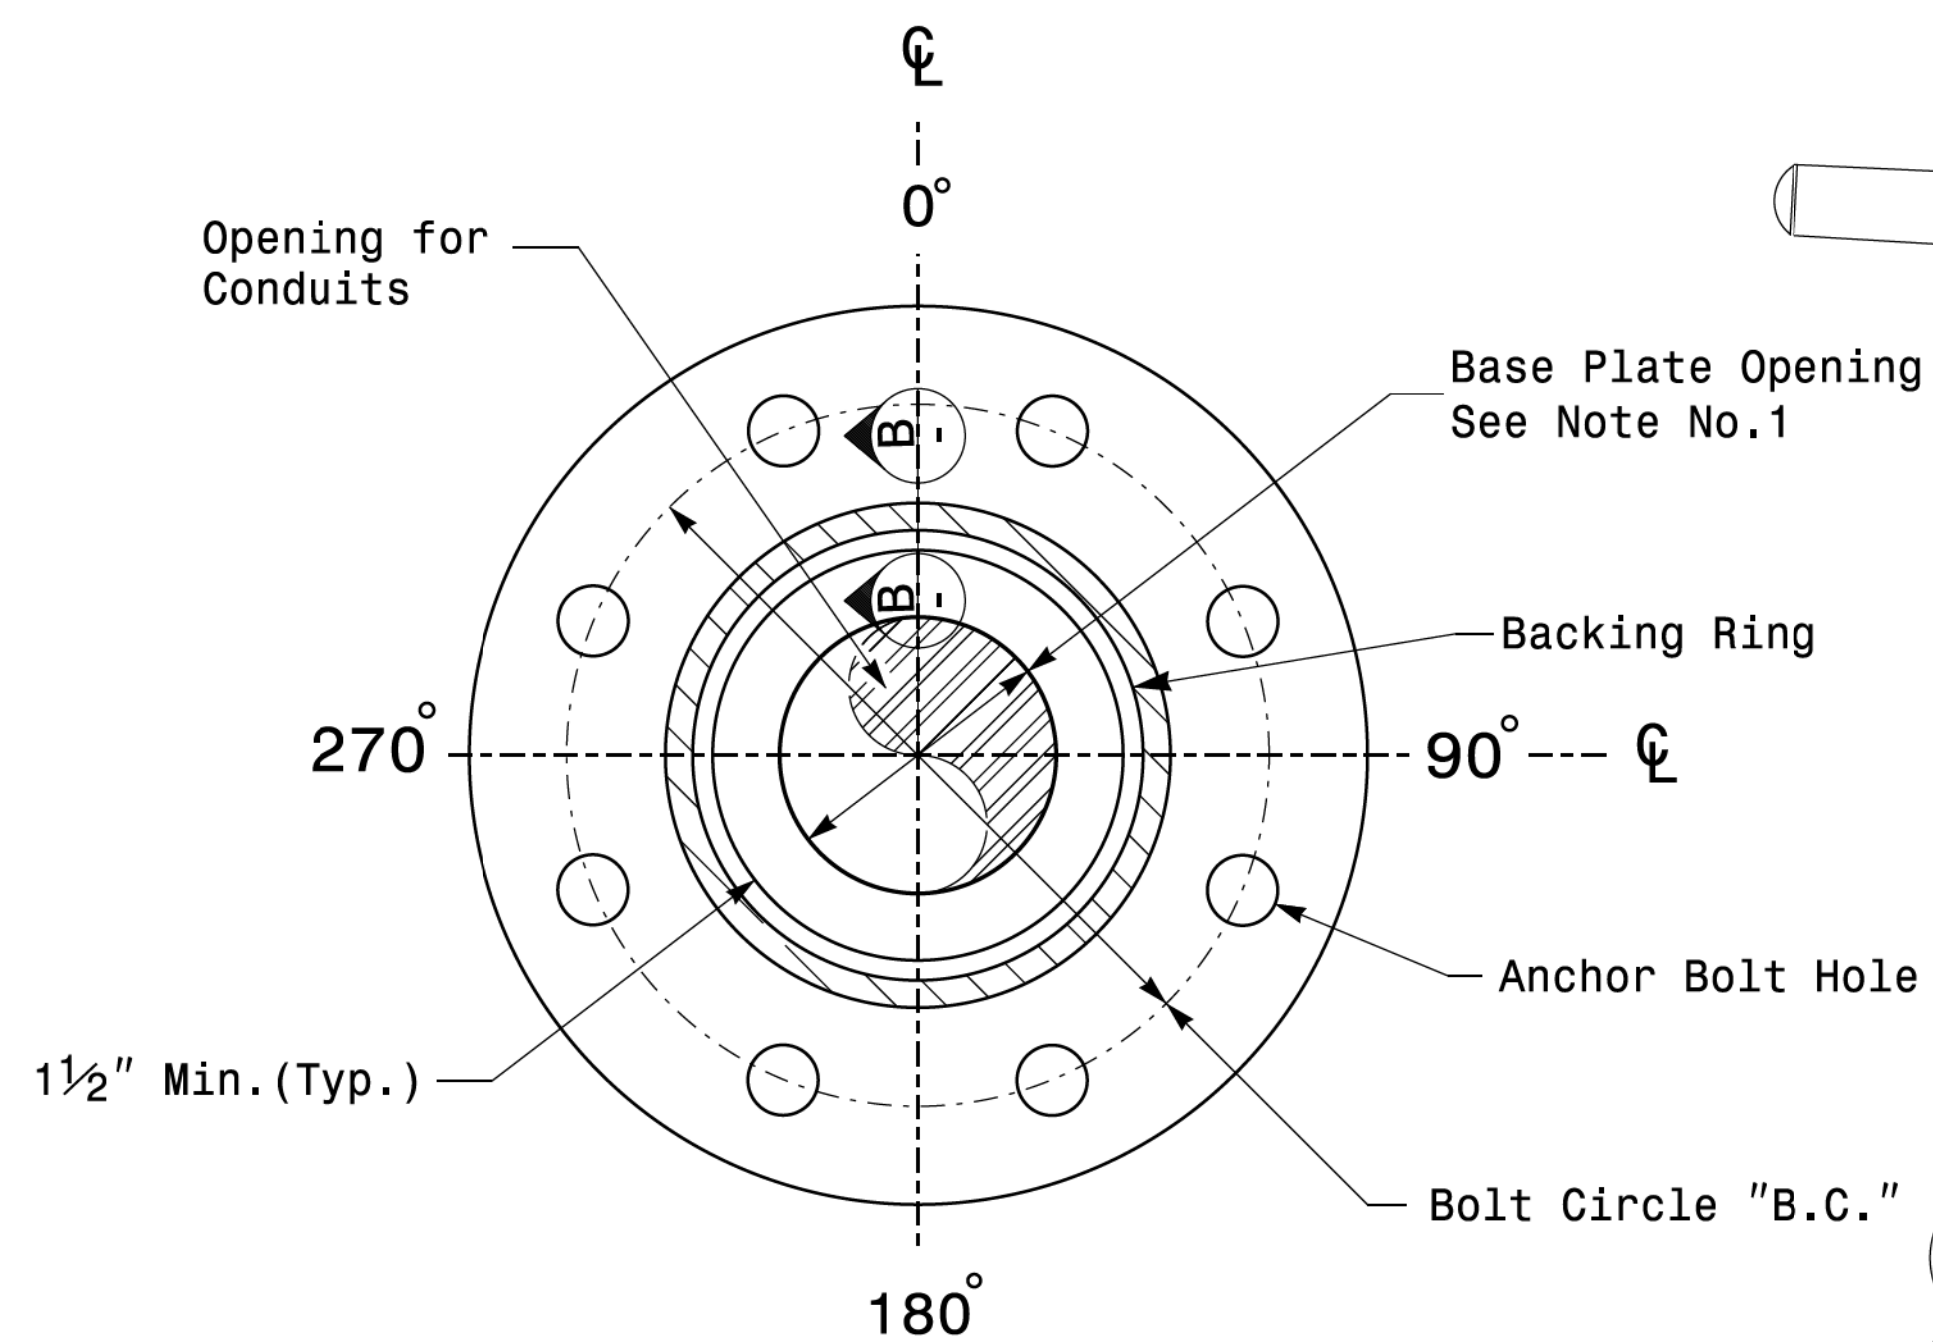


**Section A-A**  
**Pole Base Plate Details**

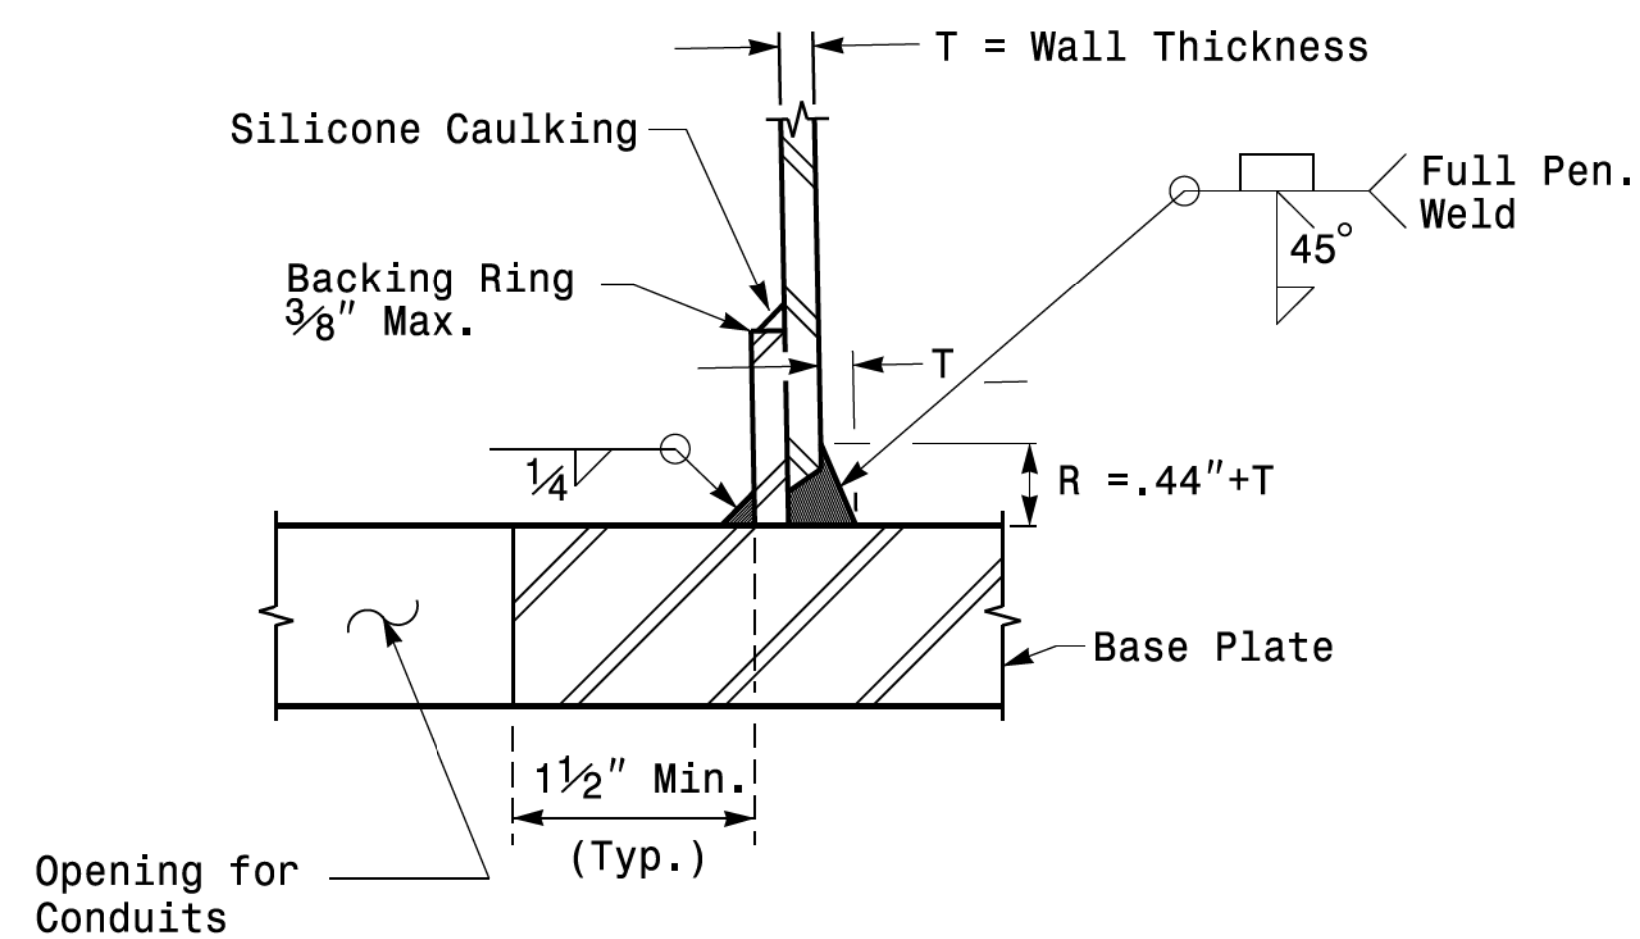


**Section B-B**  
 (Pole Attachment to Base Plate)  
**Full-Penetration Groove Weld Detail**

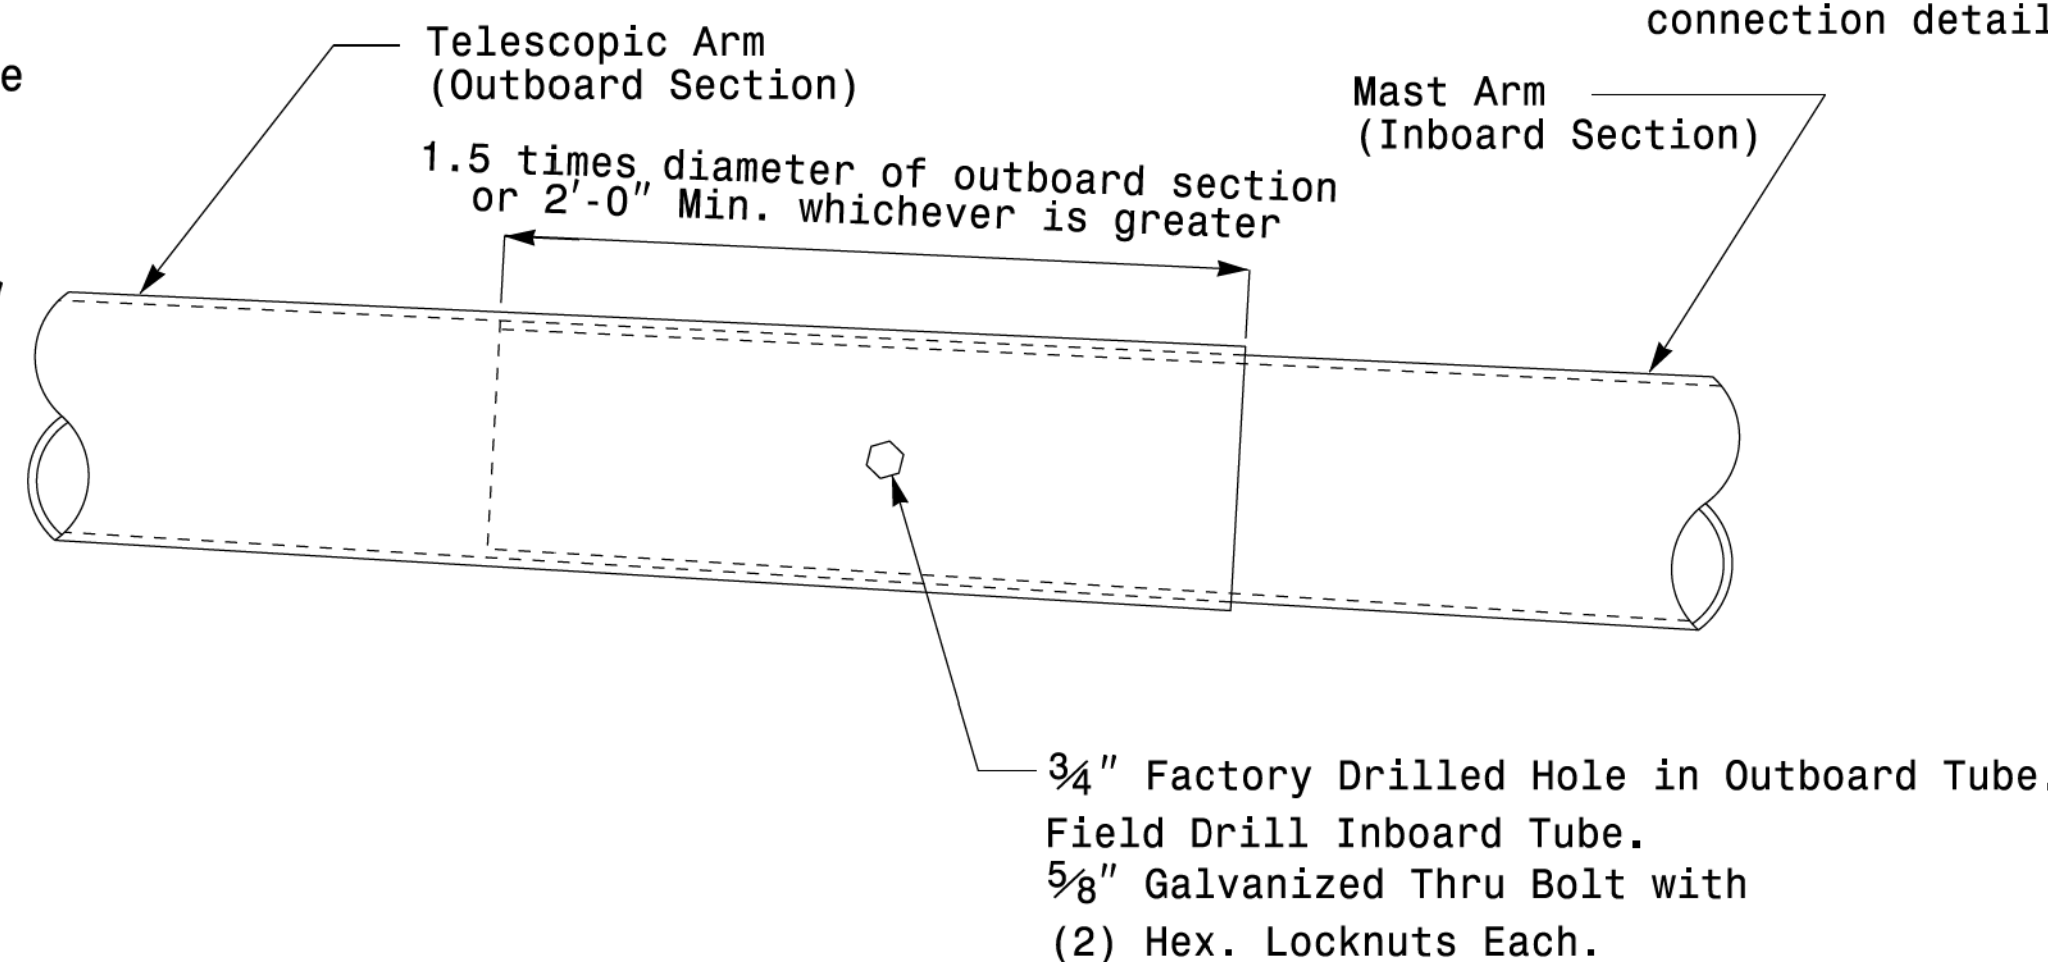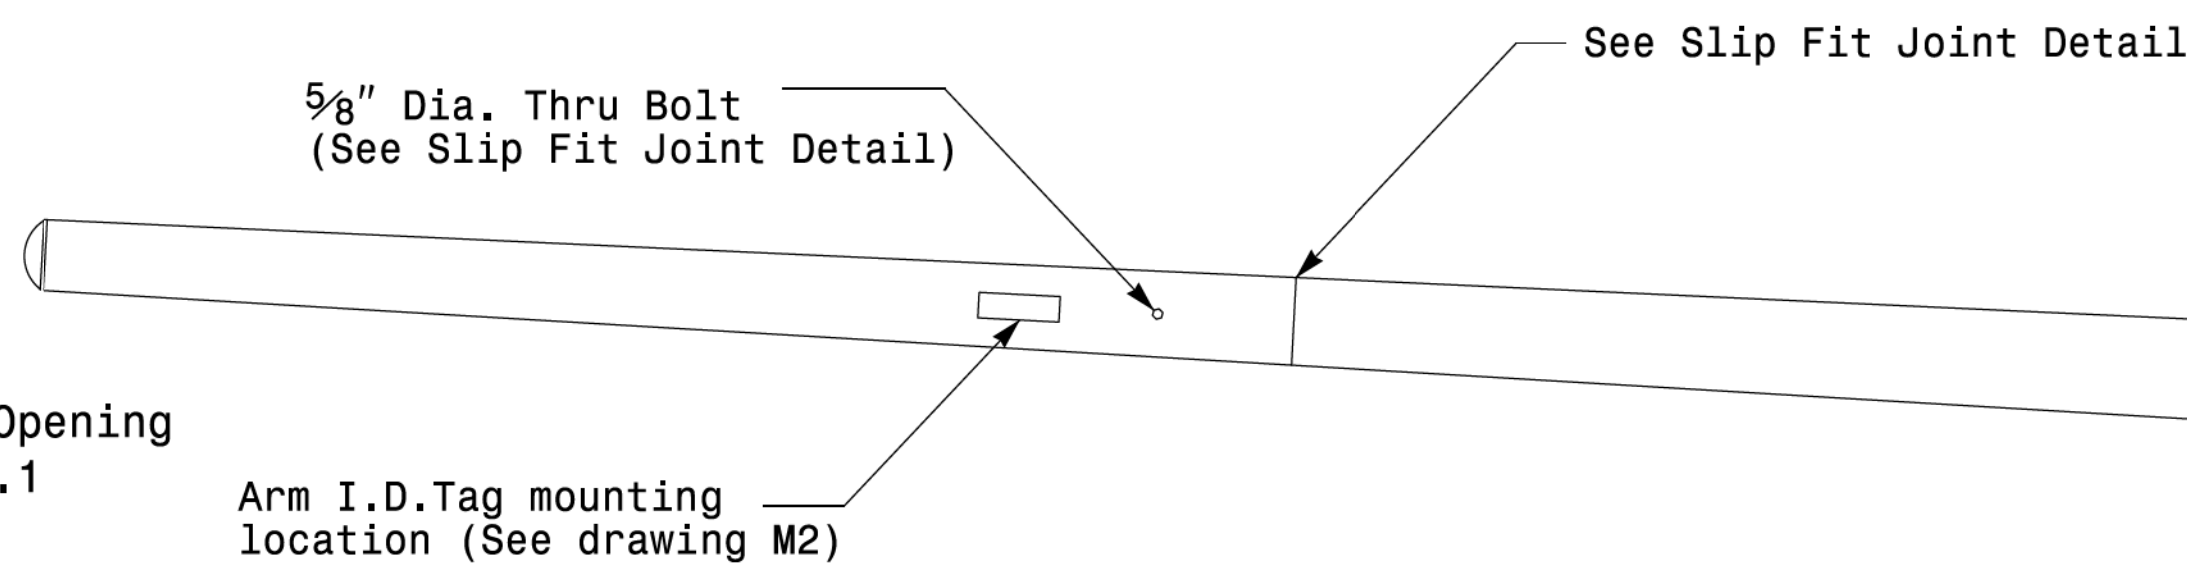

**Slip Fit Joint Detail for Mast Arm**

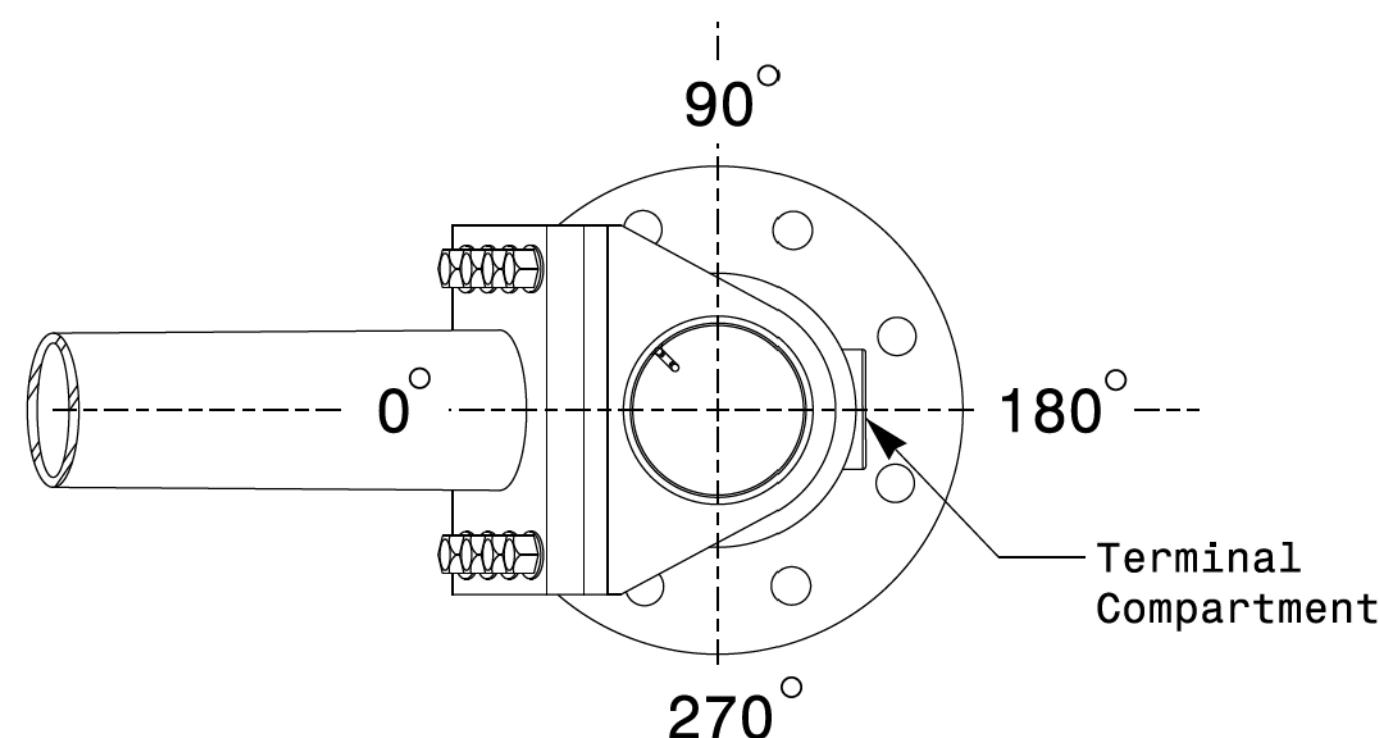

**Mast Arm Radial Orientation**

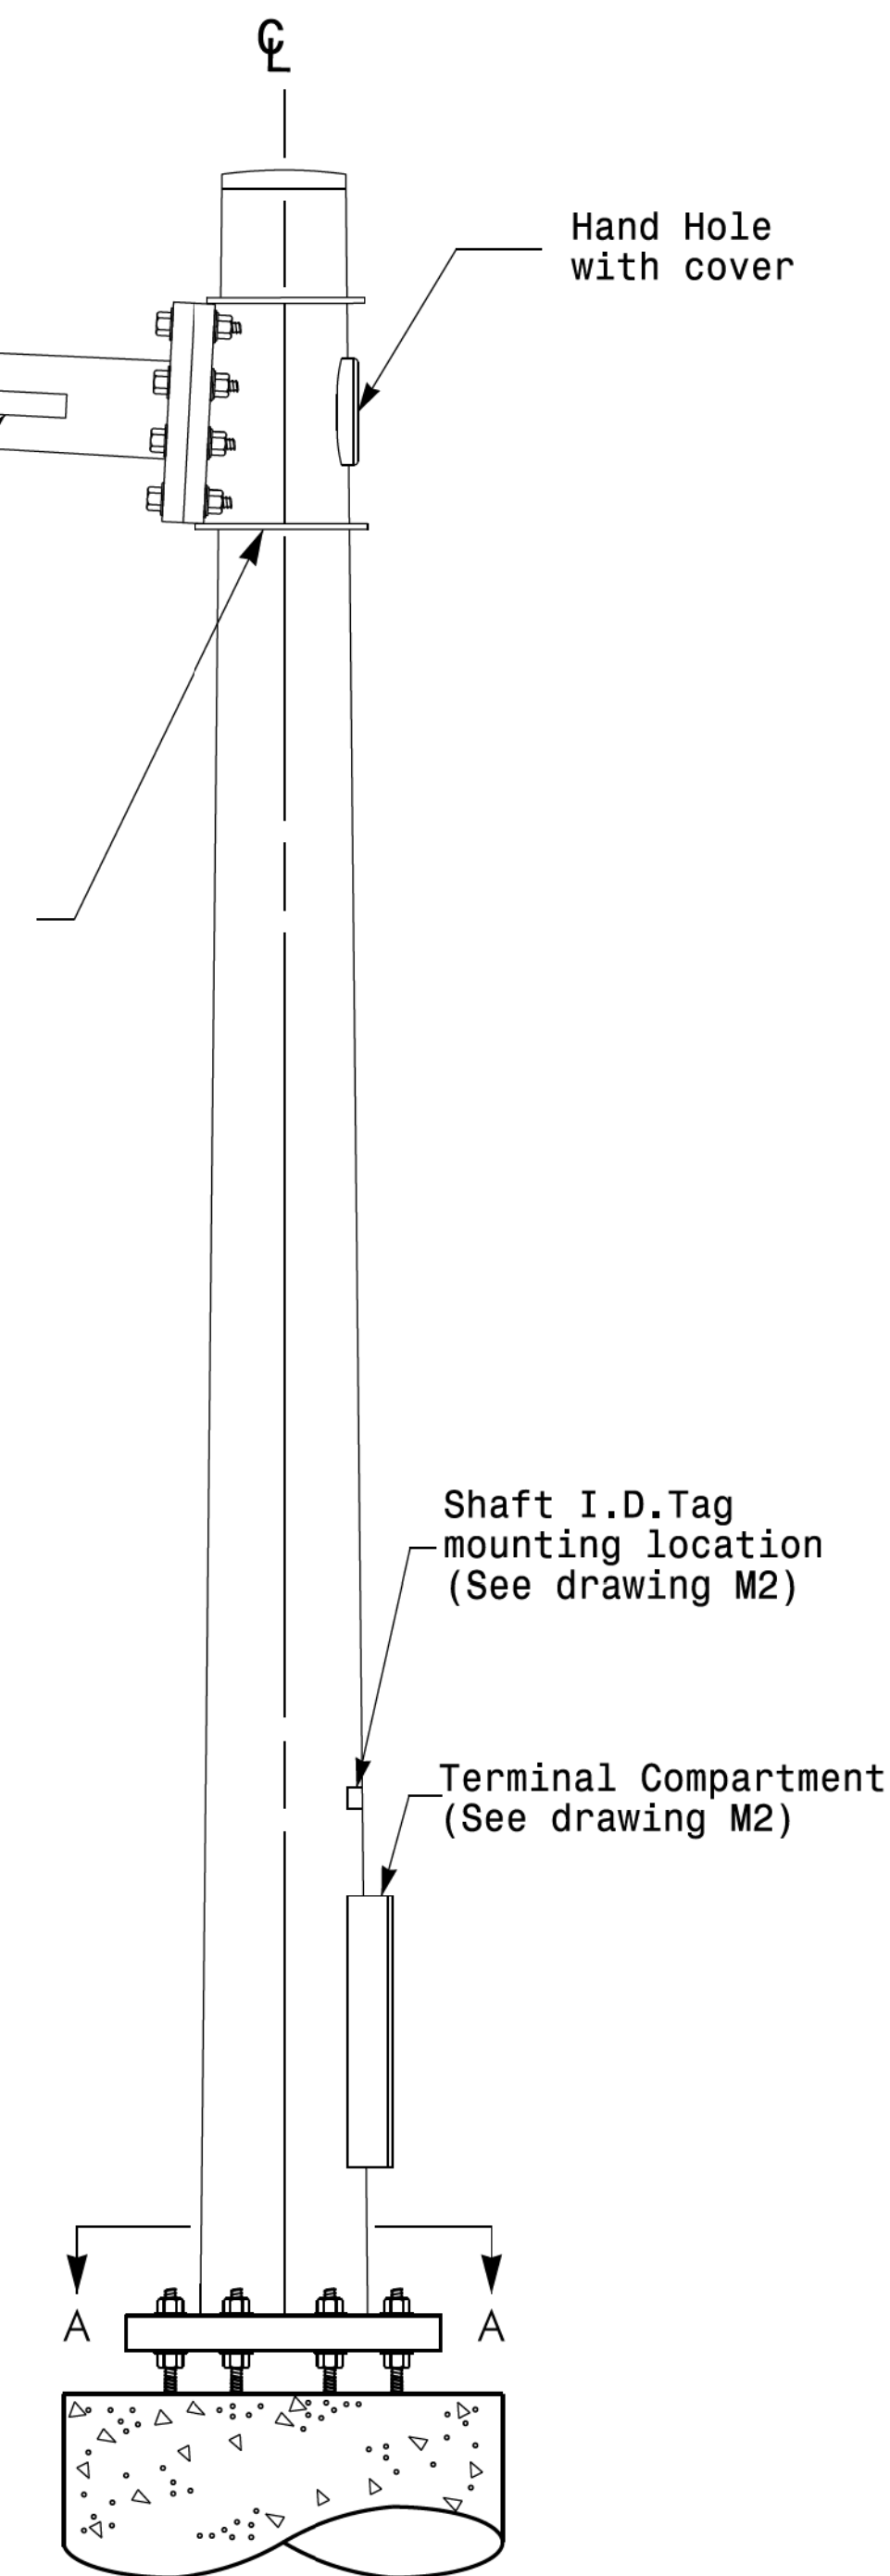

**Mast Arm Pole**

**Fabrication Details – Mast Arm Poles**






11-OCT-2017 08:33 S:\TSSG\MTS Sig.M4\Sigs\Sigs\162014 Sig.M4 Std. Fabrication Details-Mast Arm Poles.dgn

<p>Prepared in the Offices of:        TRANSPORTATION MOBILITY AND SAFETY DIVISION        STATE OF NORTH CAROLINA        DEPARTMENT OF TRANSPORTATION        Signal Design Section        750 N. Greenfield Pkwy, Garner, NC 27529</p>	<b>Typical Fabrication Details For Mast Arm Poles</b>			
	PLAN DATE: OCTOBER 2017	DESIGNED BY: K.C. DURIGON		
	PREPARED BY: N. BITTING	REVIEWED BY: D.C. SARKAR		
SCALE: 0 NA NONE	REVISIONS:	INIT.	DATE	

# Welded Ring Stiffened Mast Arm Connection



PROJECT ID. NO. SHEET NO.

R-5812 Sig.M5

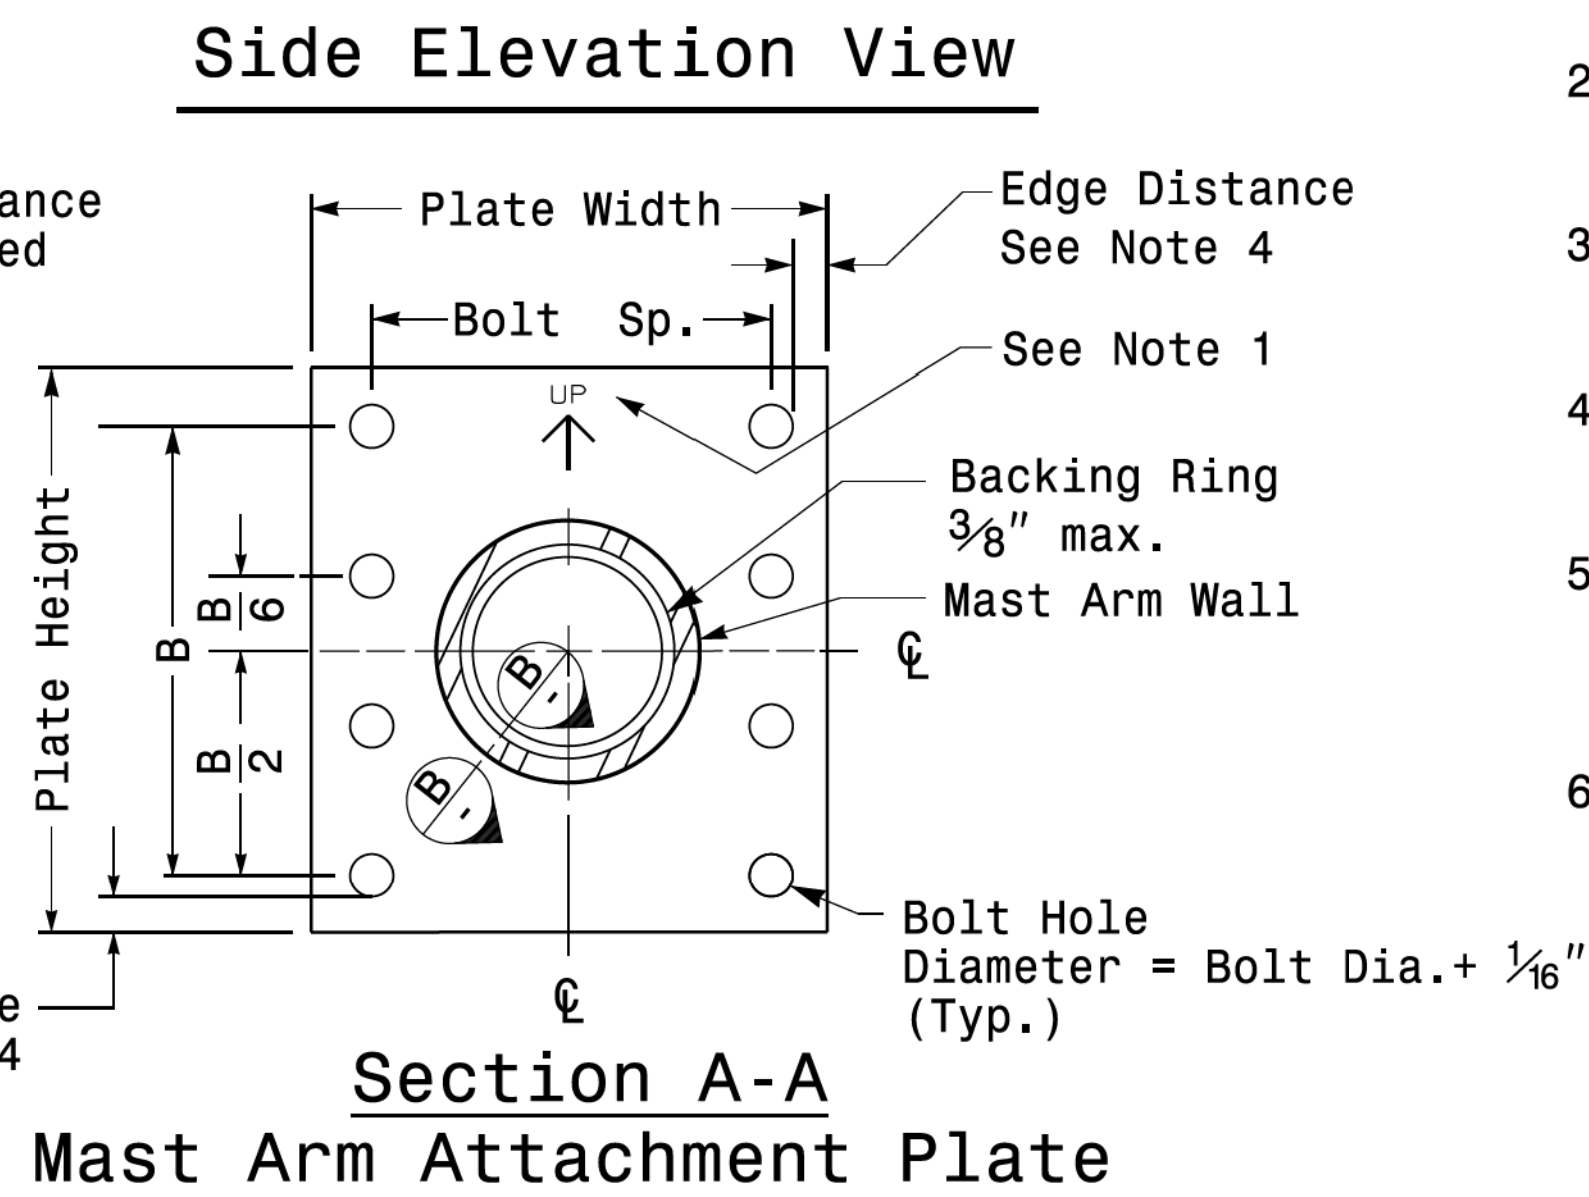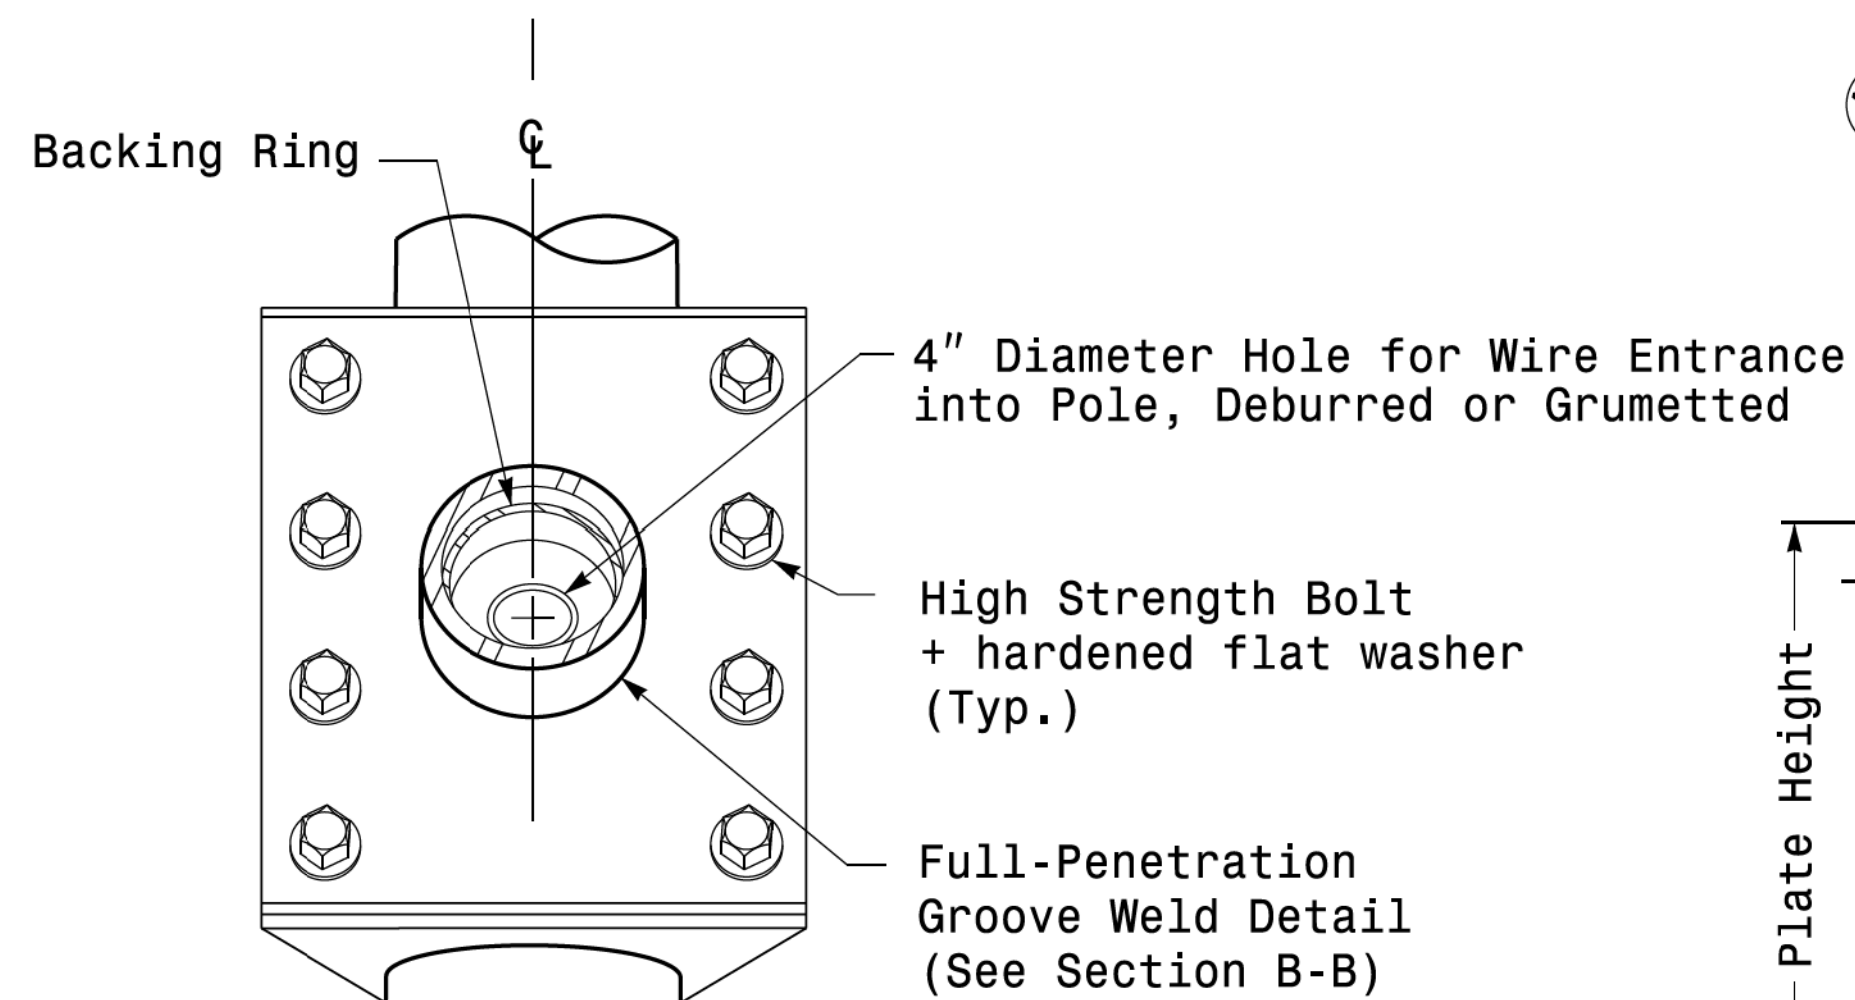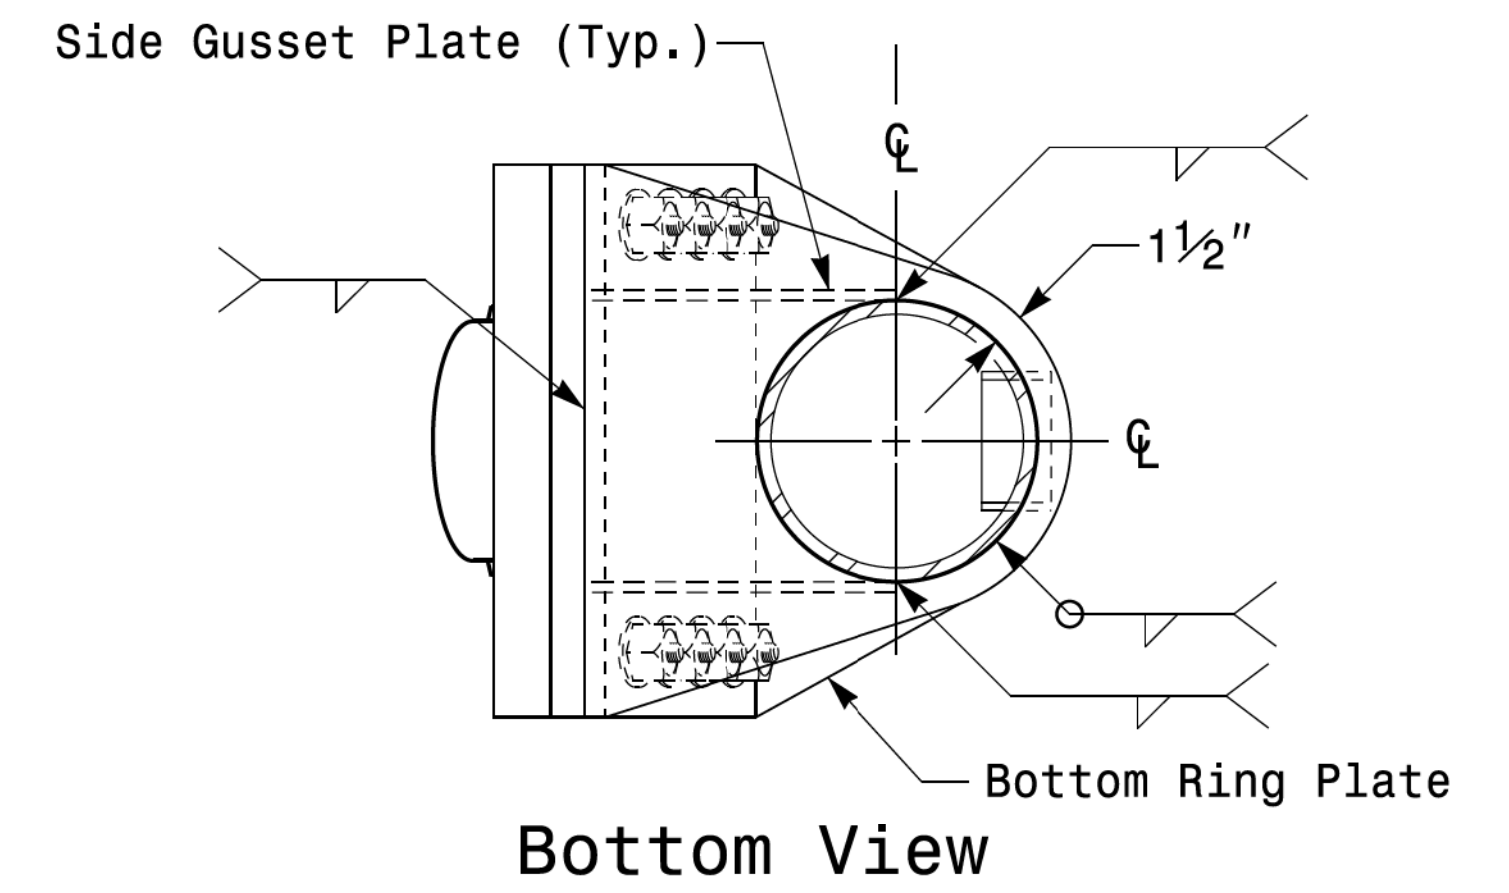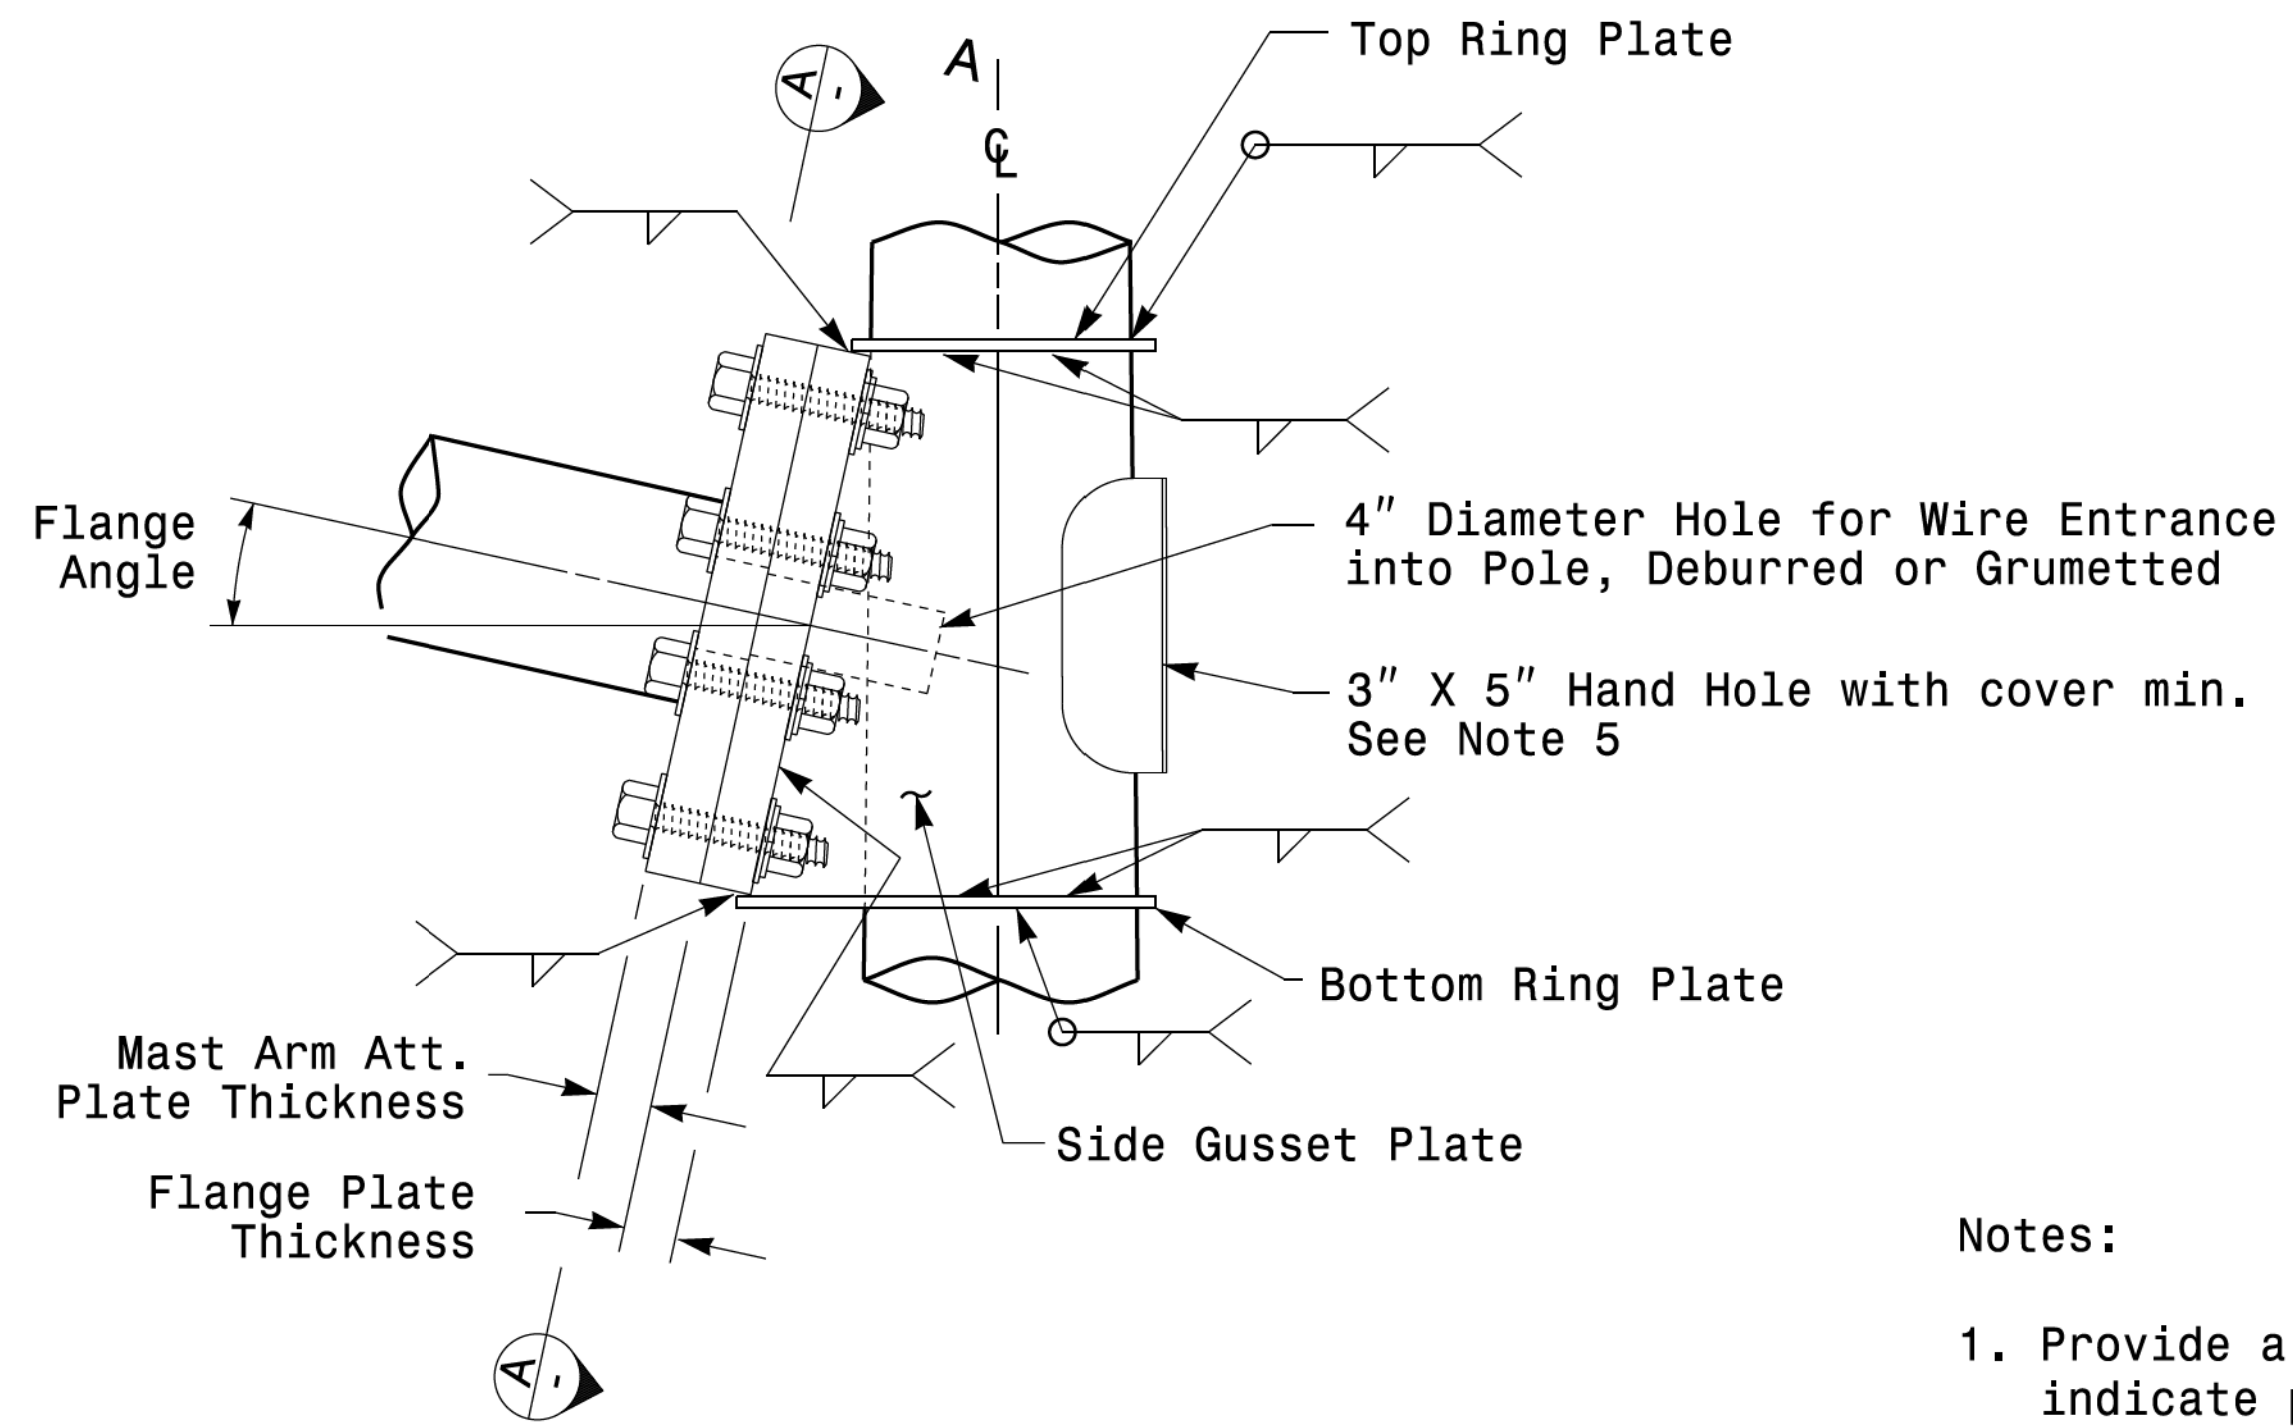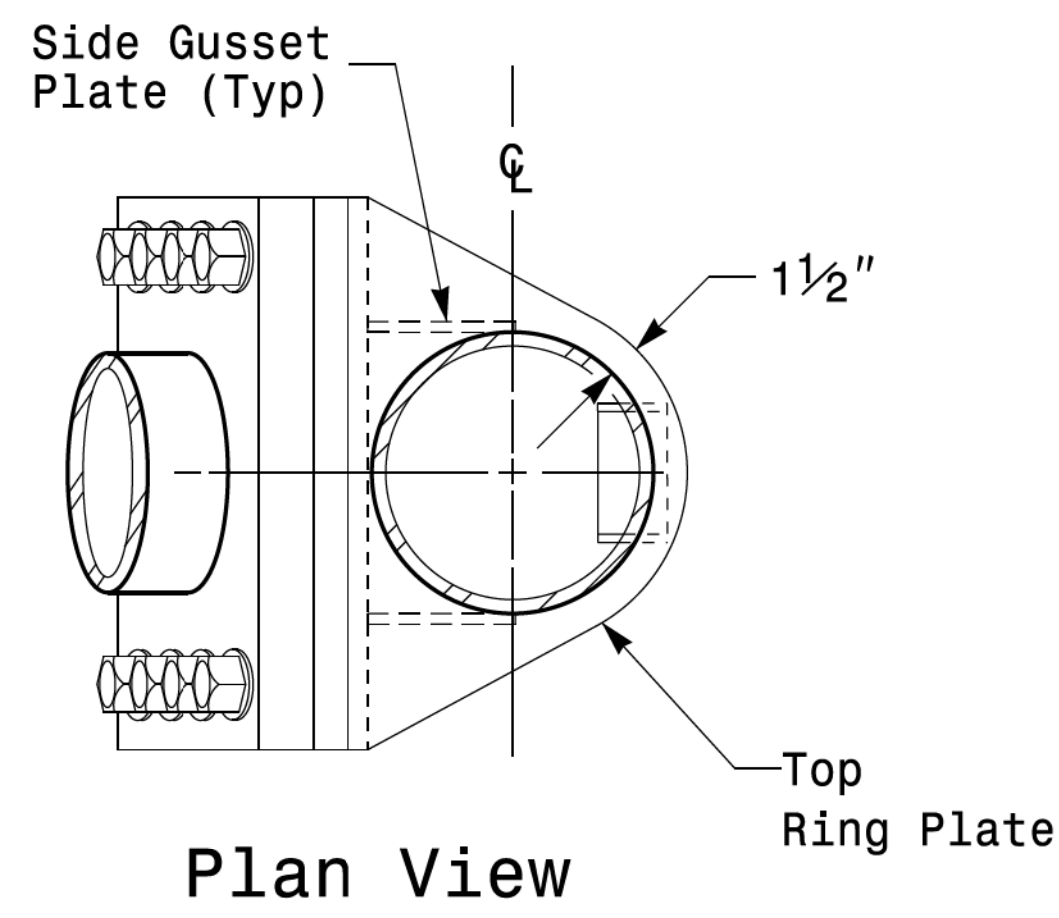

**Notes:**


1. Provide a permanent means of identification above the mast arm to indicate proper attachment orientation of the mast arm.
2. Designer will determine the size of all structural components, plates, fasteners, and welds shown unless they are already specified.
3. Fabricator is responsible for providing appropriate holes at drainage points to drain galvanizing materials.
4. For minimum edge distance follow AISC Table J3.4 and J3.5. For nominal bolt hole size use Table J3.3.
5. Provide upper handhole as necessary when shaft extensions are required for luminaire arms or camera. For poles without luminaires/camera, wiring can be done through the top of pole.
6. Allowable range of flange tilt angle will vary from 0° to as required.

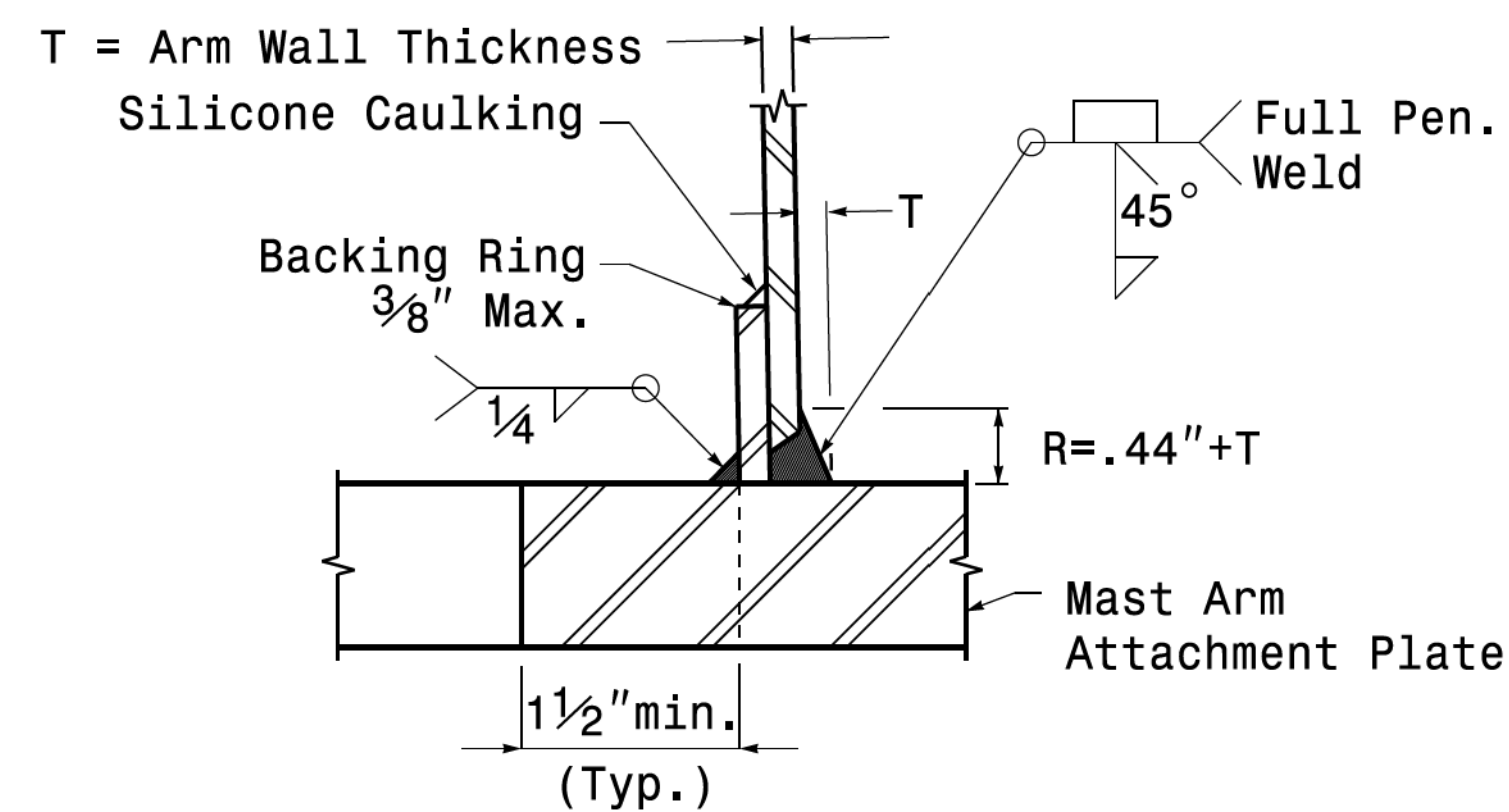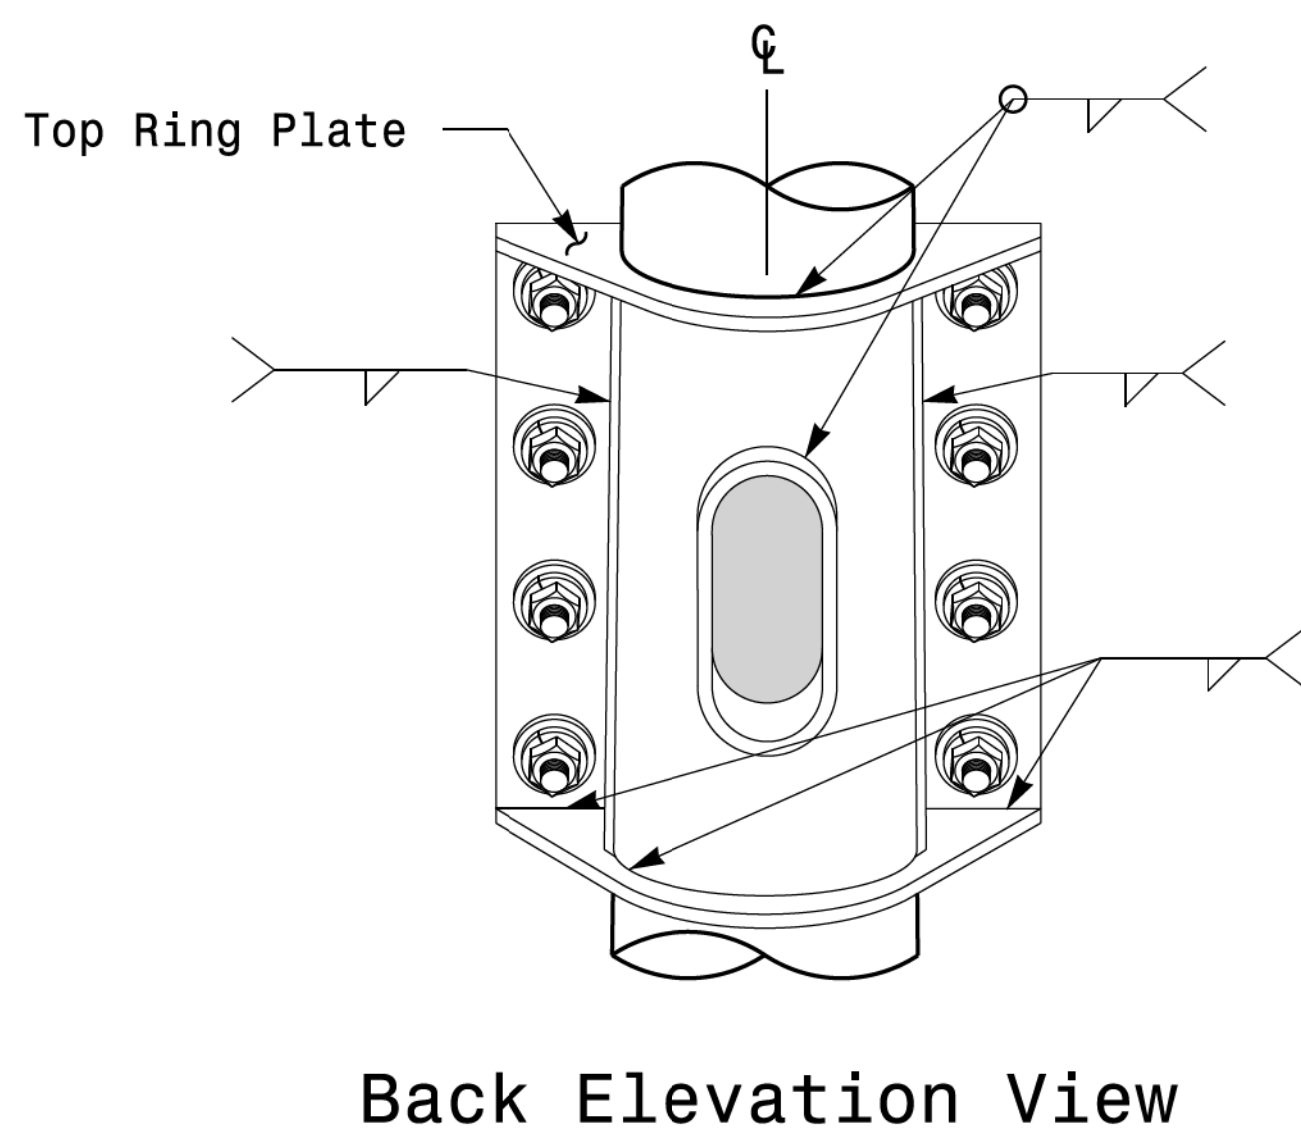


	Typical Fabrication Details For Mast Arm Connection To Pole		SEAL 
	PLAN DATE: OCTOBER 2017 PREPARED BY: N. BITTING	DESIGNED BY: C.F. ANDREWS REVIEWED BY: D.C. SARKAR	
SCALE 0 NA NONE	750 N. Greenfield Pkwy, Garner, NC 27529		Described by: DATE: 10/11/2017

11-001-2017 08:35  
 S:\1350\115 5\gnal\sig\gnal Design Section\1350\115 5\gnal\sig\gnal Mast Arm Pole.dgn  
 Connection Fabrication Detail 1350 Mast Arm Pole.dgn


**Fabrication Details – Mast Arm Connection**

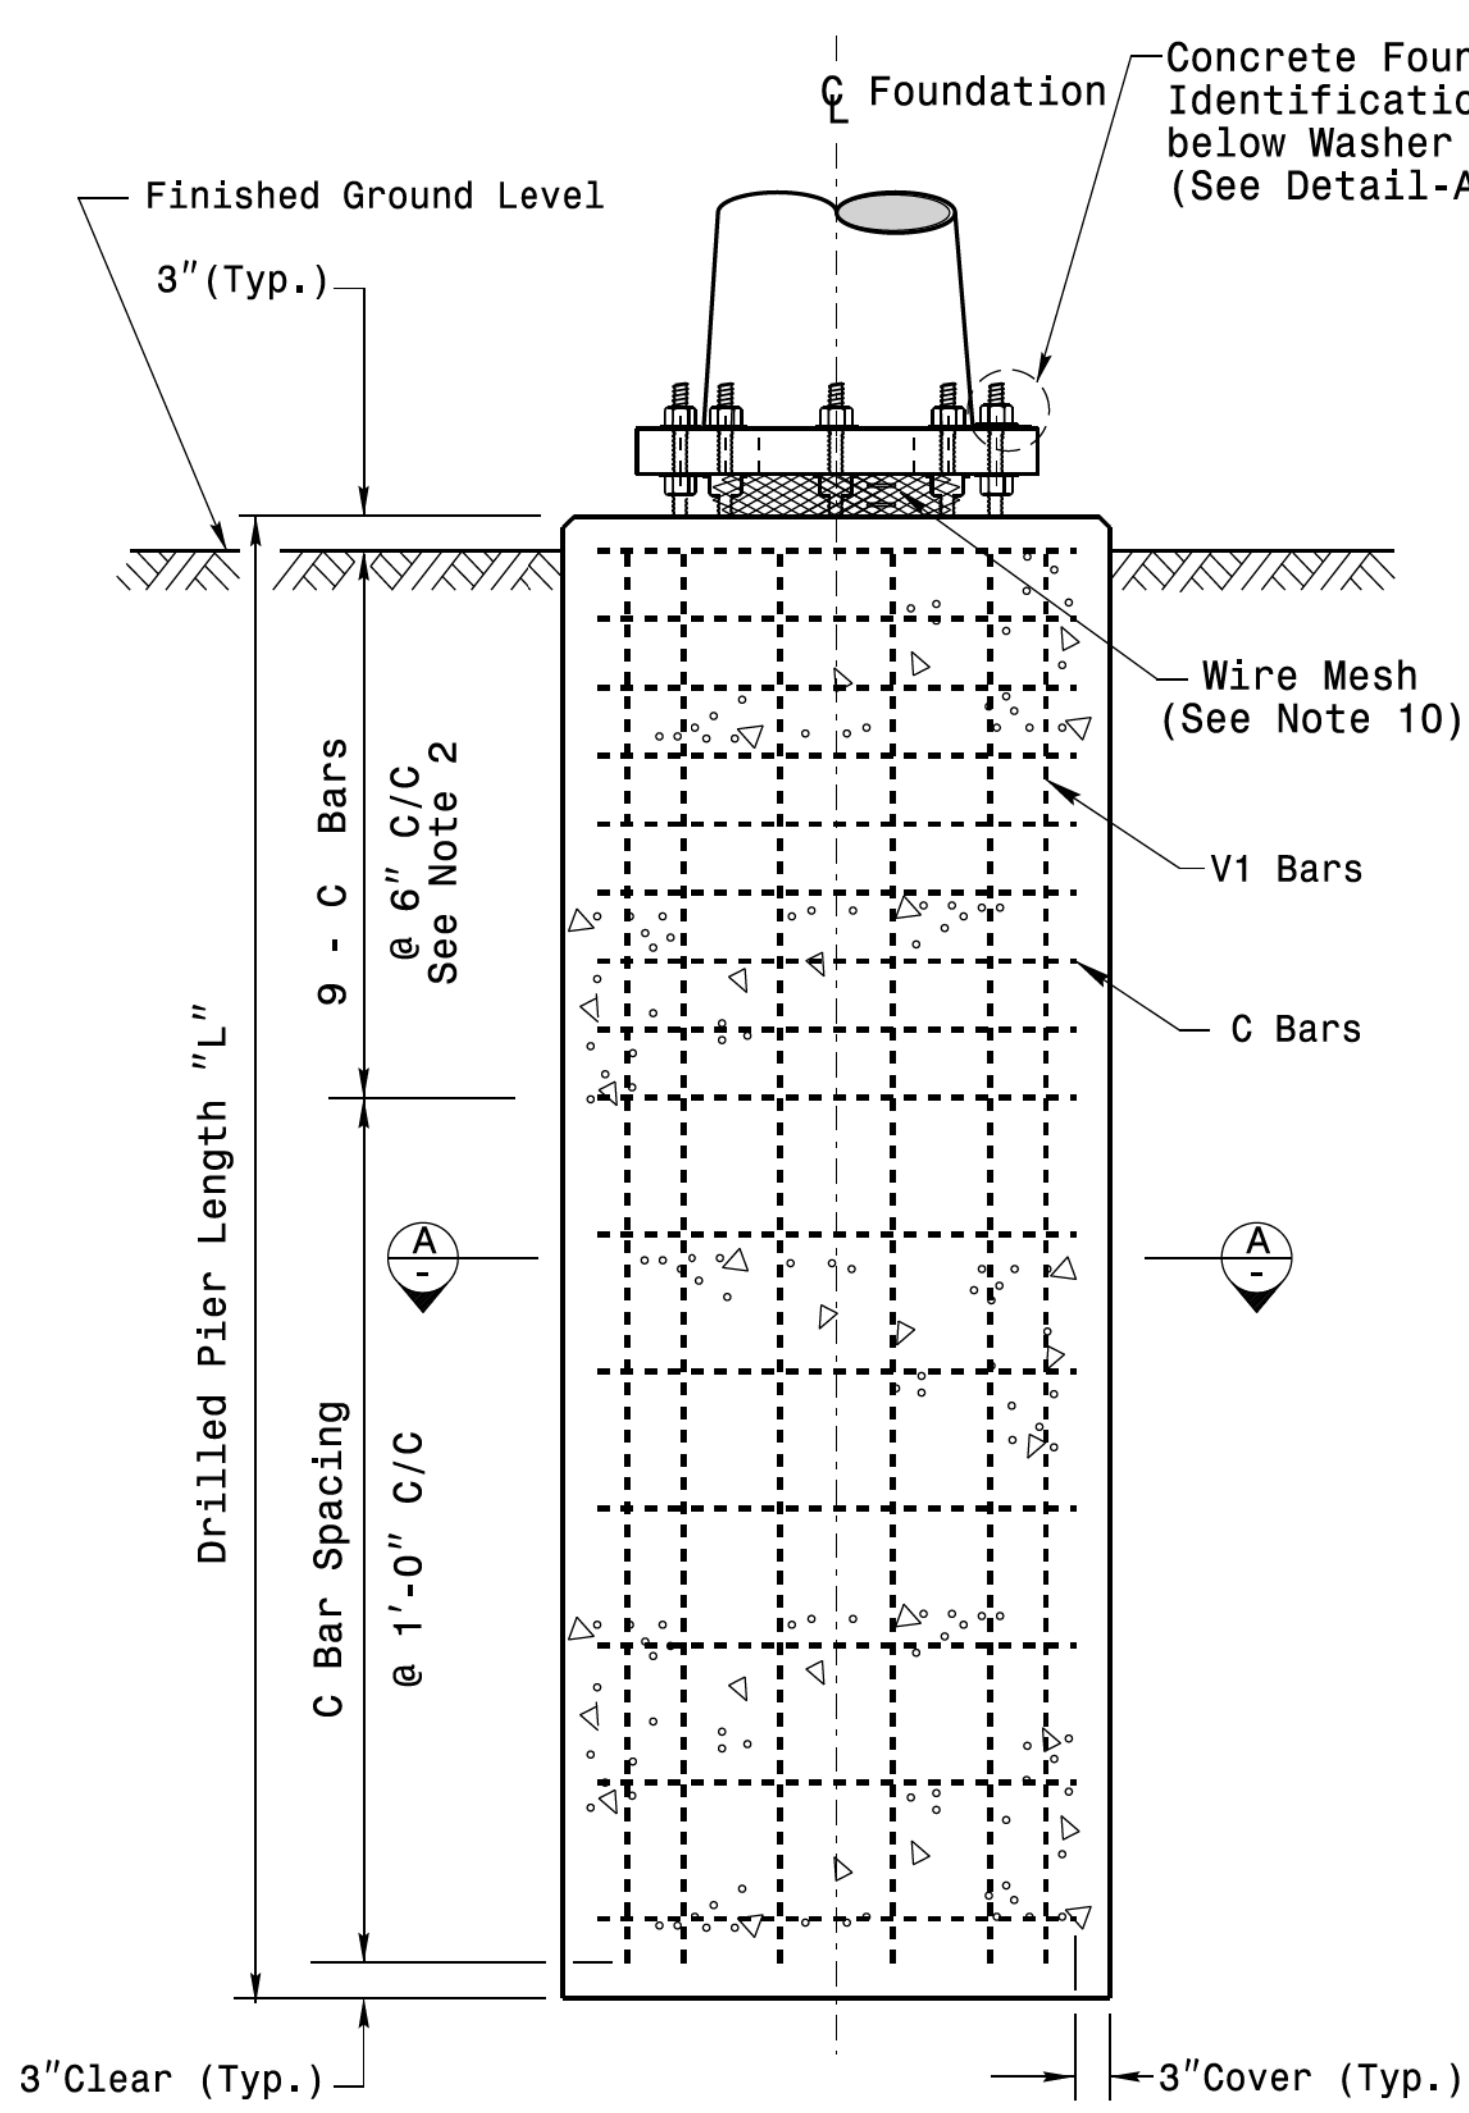


**Concrete Shaft Elevation**

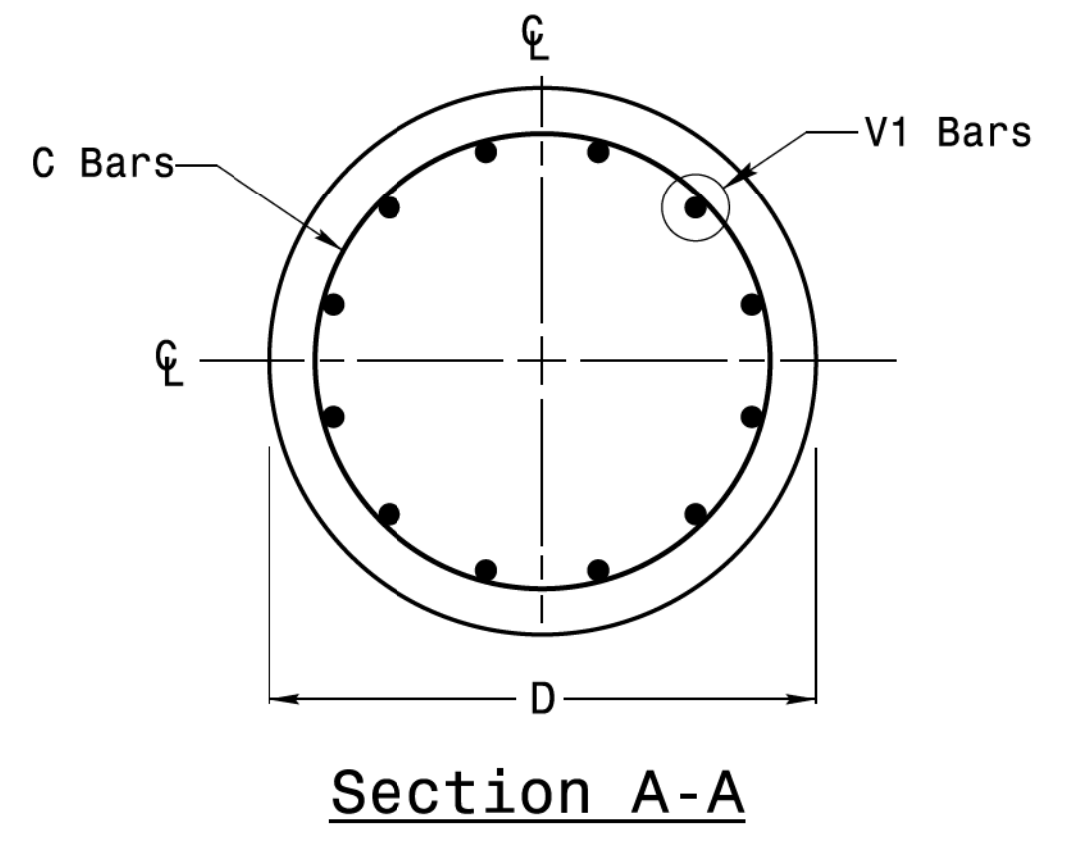

**Section A-A**

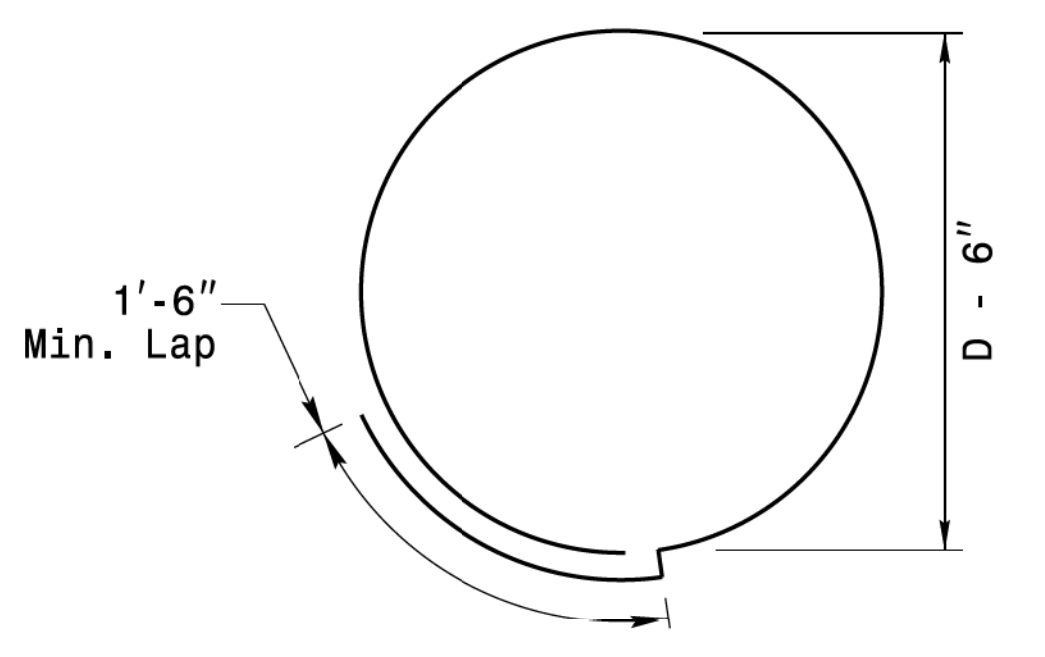


**Typical "C" Bar Detail**

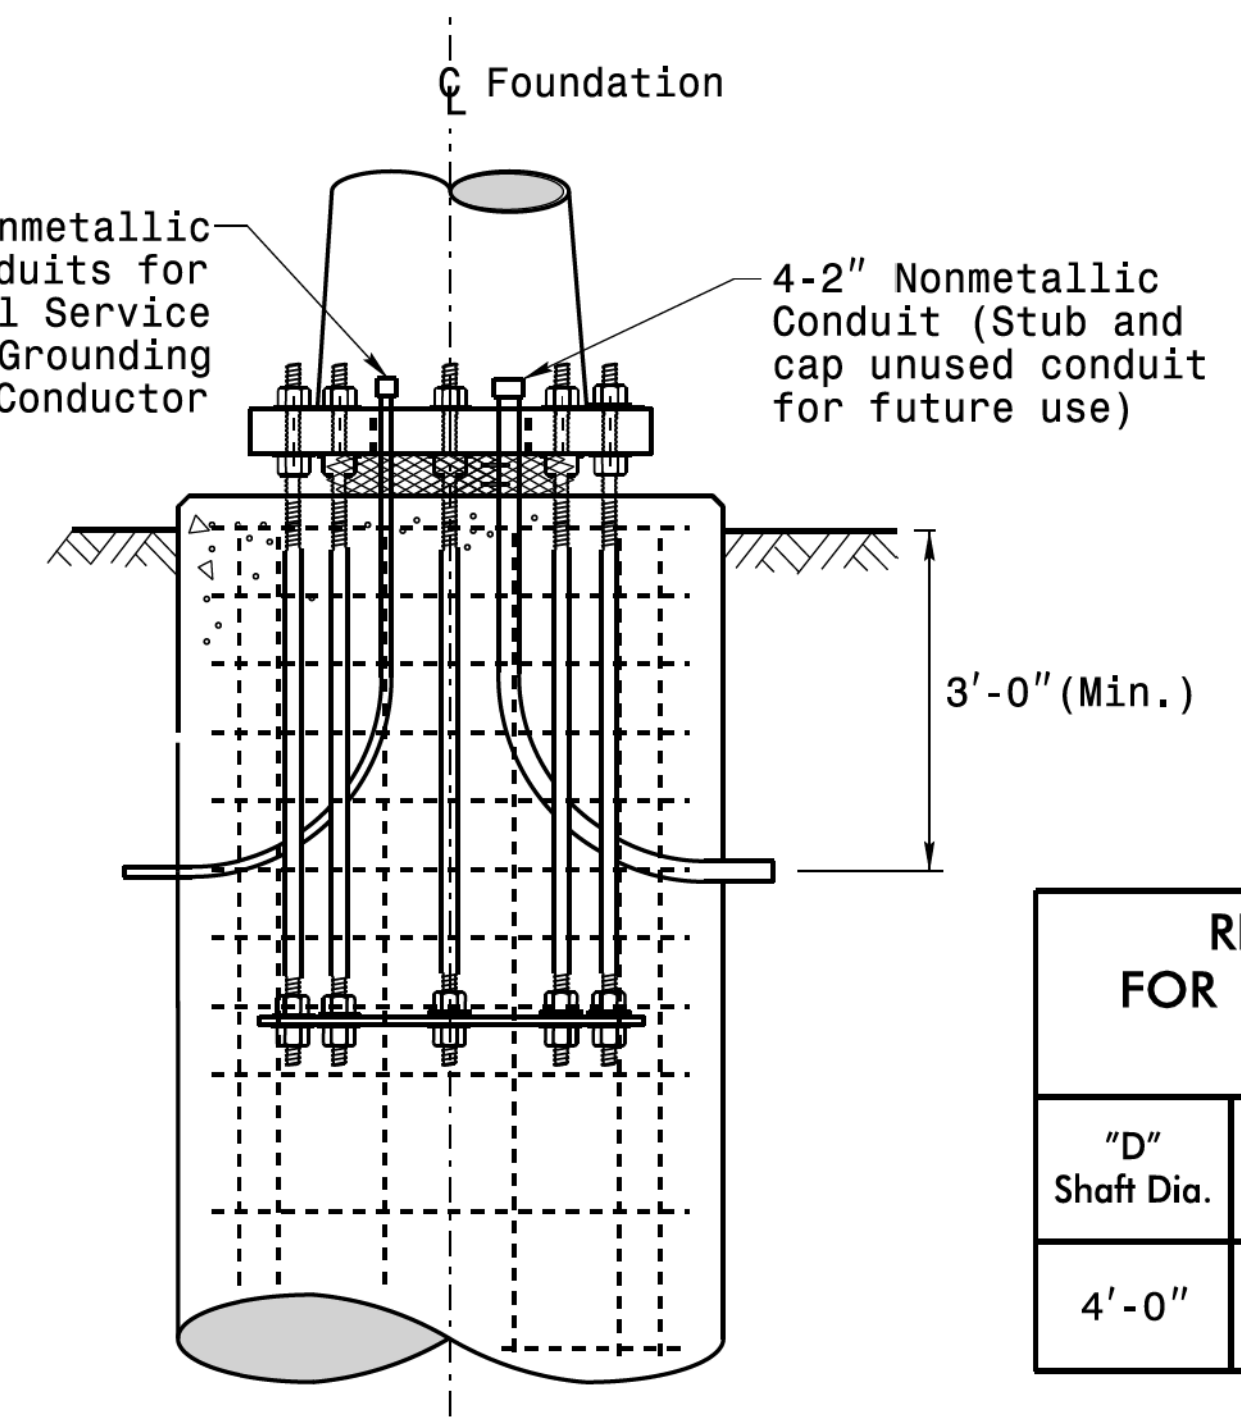

**Typical Foundation Conduit Details**

"D" Shaft Dia.	Conc. Volume (cu. yds.)	Bar Name	MIN.	Size	Type	Length
4'-0"	.465 x L	V1	-	#8	STR.	**
		C	*	#4	CIR.	12'-6"

\* See Note No. 2  
\*\* See Note No. 3

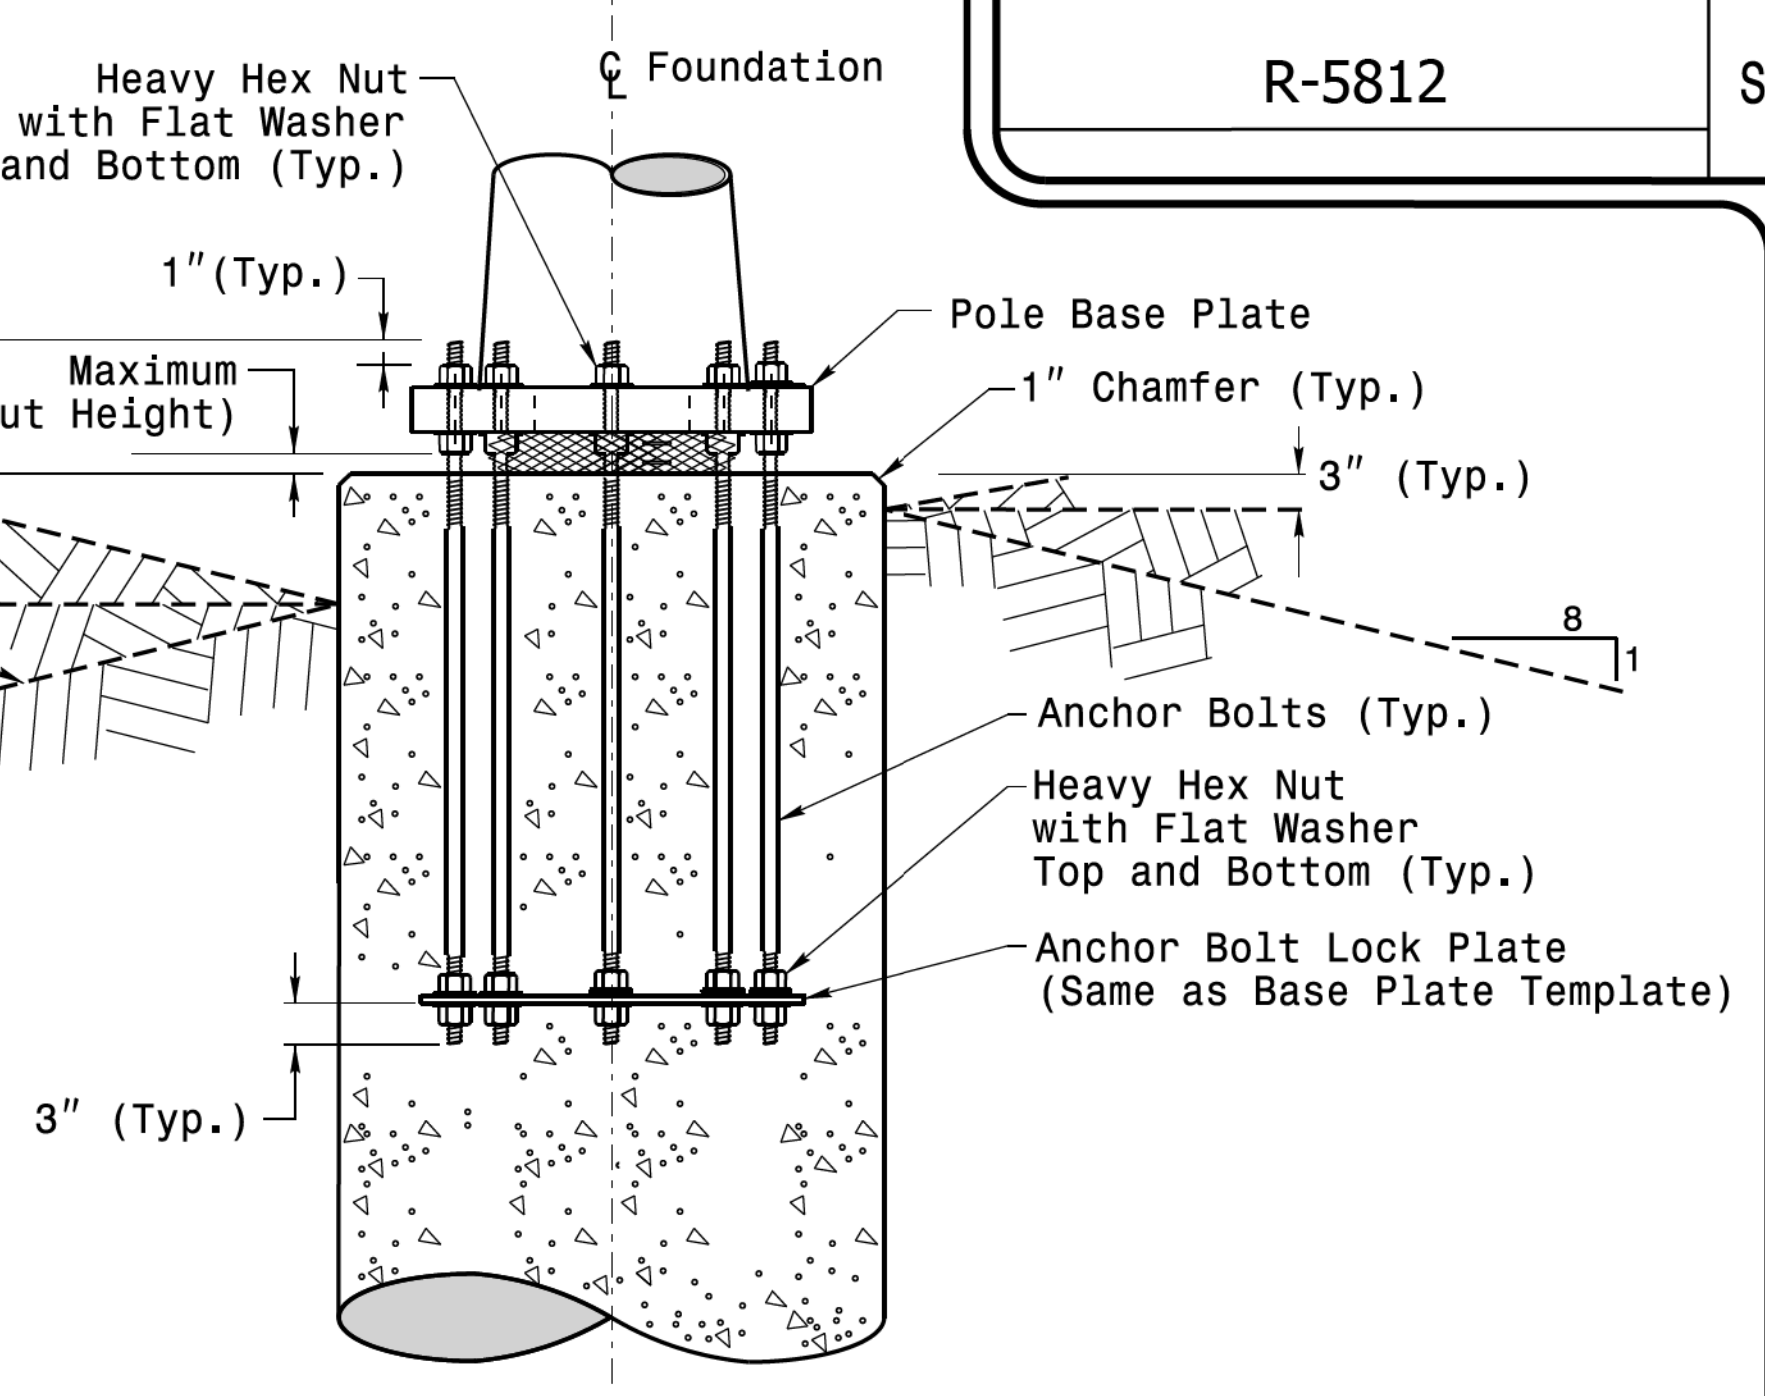


**Typical Foundation Anchor Bolt Details**

(Reinforcing Cage Not Shown for Clarity)

**General Notes:**

- If actual subsurface conditions differ significantly from boring data contact the Engineer before excavating or placing concrete.
- Circular tie reinforcing rings may be vertically adjusted by +/-3" at a depth between 2'-0" and 3'-0" to facilitate the installation of electrical conduit entering in the cage.
- For standard foundations, see sheet Sig. M8 for details. Vertical reinforcing bars (V1) may be horizontally adjusted by +/-3" to facilitate the installation of electrical conduit entering into the cage.
- Provide 2" to 5" foundation projection above ground level depending on the ground slope.
- Unless otherwise shown, foundation designs are based on non-sloping level ground surfaces with slope ratios of 8:1 (H:V) or flatter. If actual ground line slopes are steeper contact the Engineer before excavating or placing concrete.
- Construct foundations in accordance with NCDOT Standard Provisions SP09 R005- Foundations and Anchor Rod Assemblies for Metal Poles. All applicable 2018 NCDOT Standard Specifications are referenced in this provision. Refer to the NCDOT Resources/Specifications page located on the Connect NCDOT website.  
[https://connect.ncdot.gov/resources/Specifications and Special Provisions.aspx](https://connect.ncdot.gov/resources/Specifications%20and%20Special%20Provisions.aspx)
- Use air entrained AA concrete mix with a compression strength of f'c=4500 psi.(min.) after 28 days.
- Use ASTM A615 grade 60 deformed bars for all reinforcing steel. Maintain at least 3" cover on all reinforcement.
- Locate the Identification Tag on the top of the base plate, directly above the conduit's entry point.
- Provide two layers of galvanized welded 23 gauge (0.25) 6" wide 4 mesh wire around pipes under the base plate and secure it with ties if necessary.
- Preferred location for the I.D. Tag is as shown in Detail-A; directly above the conduit entering the foundation.

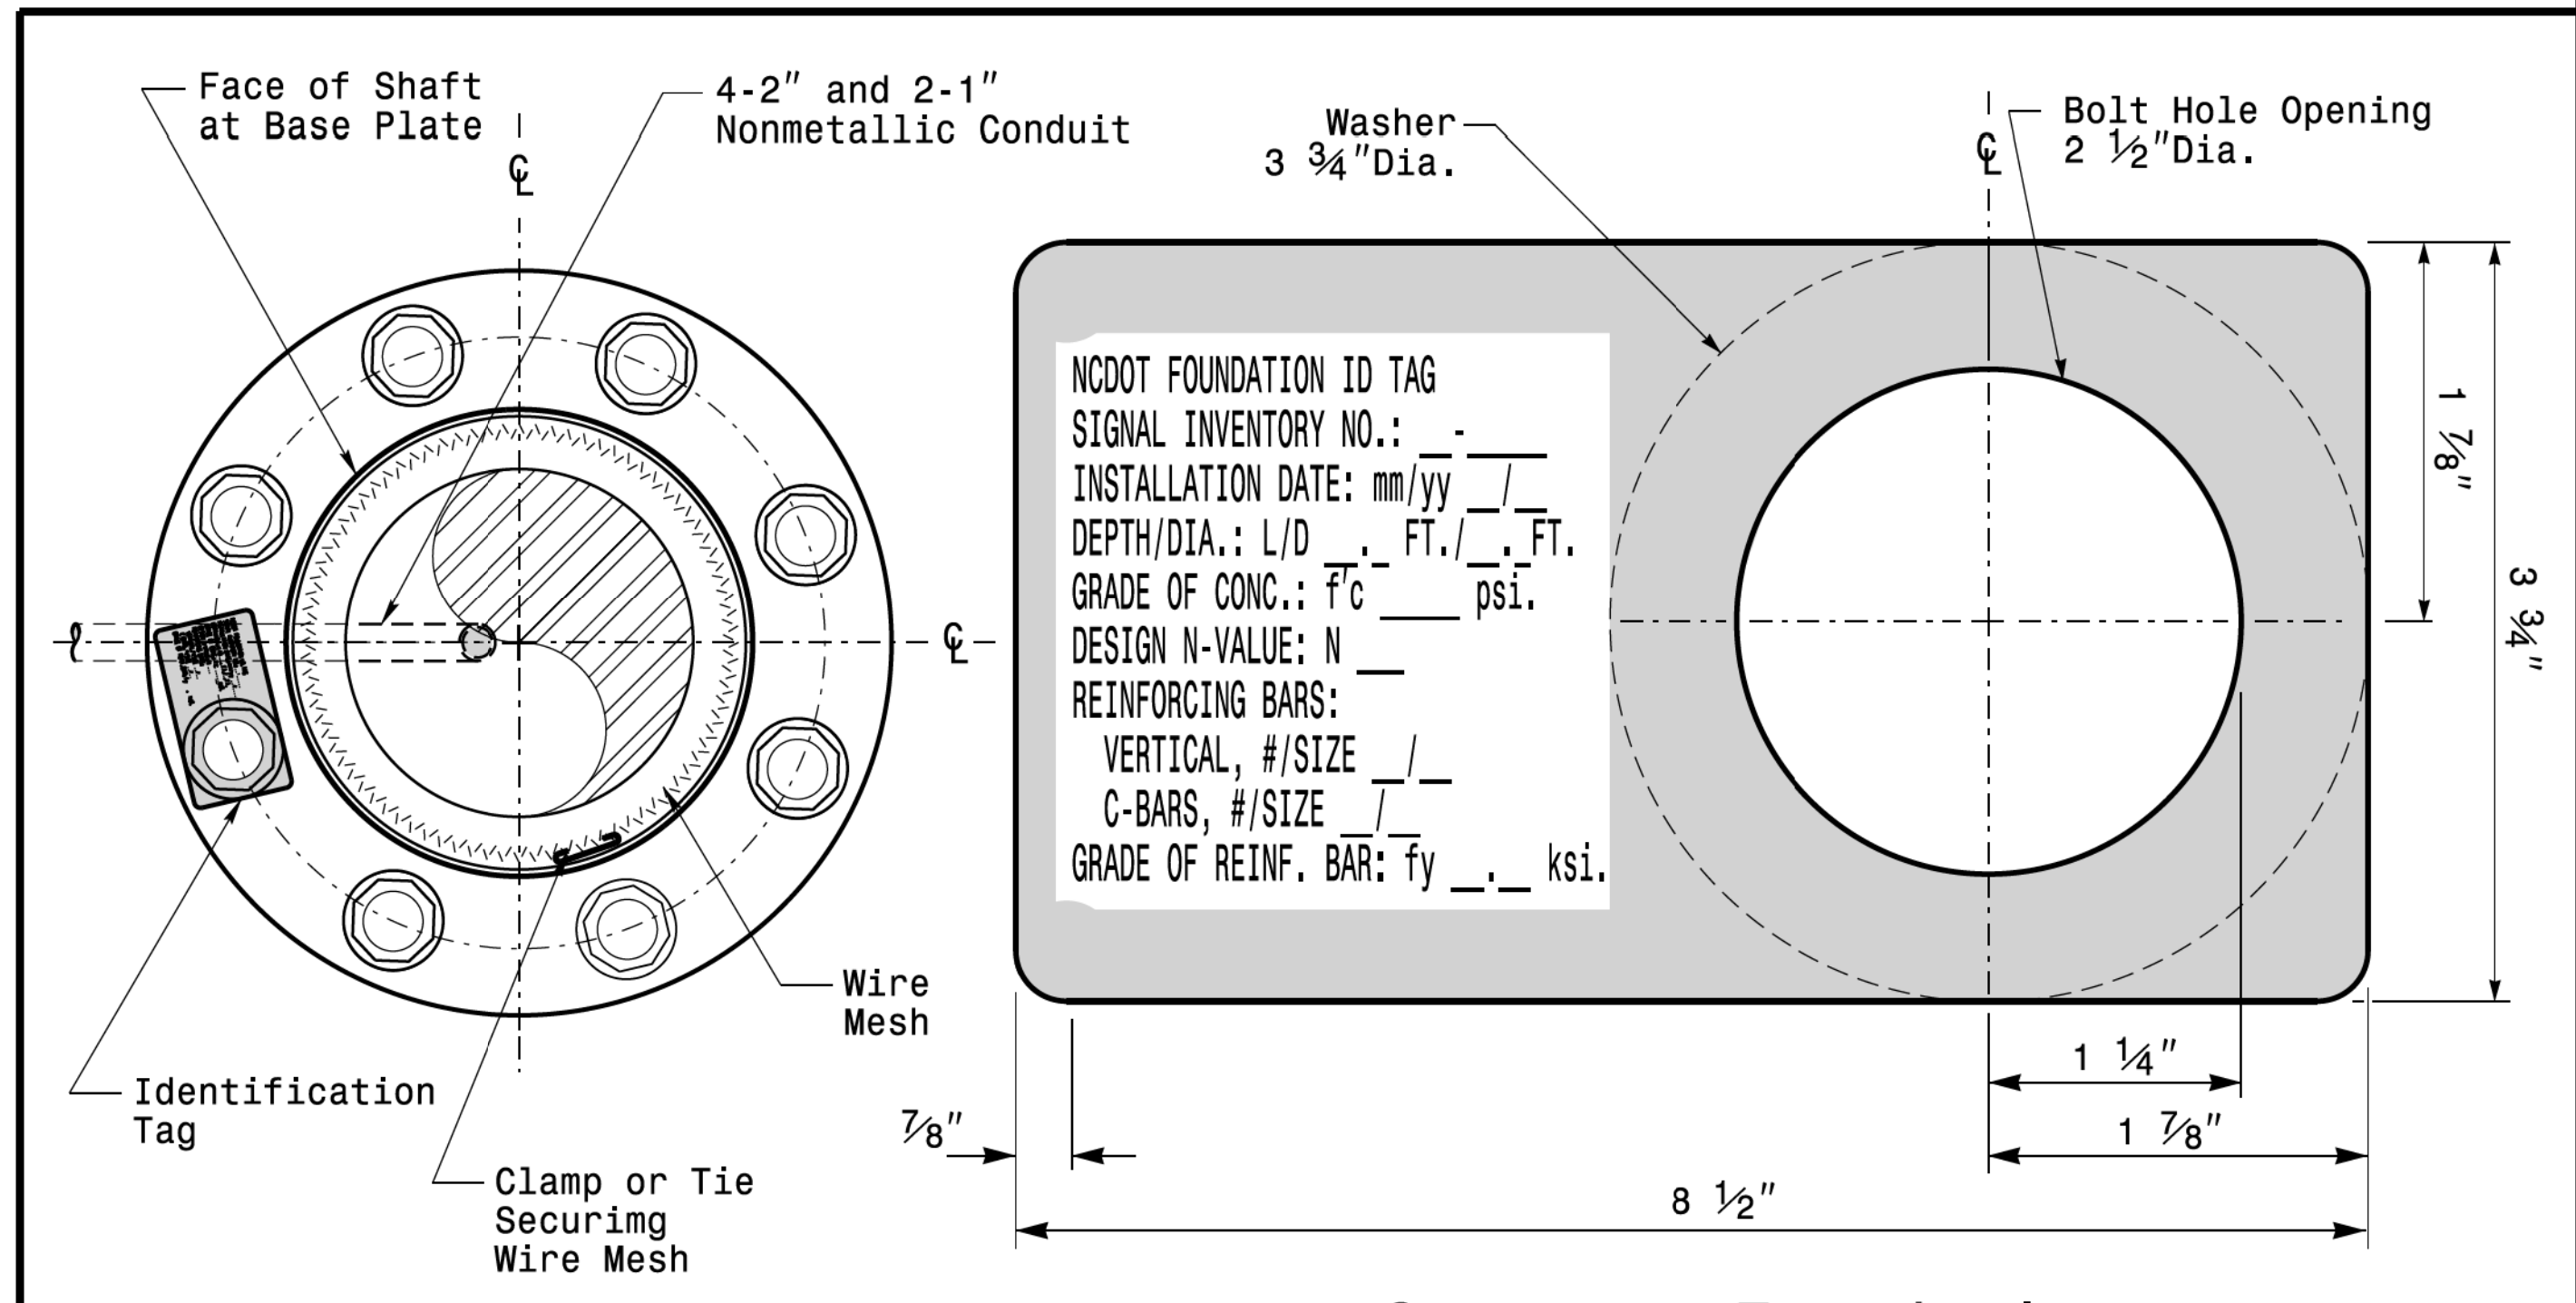

**Concrete Foundation Identification Tag Details**

D = Diameter  
L = Length/Depth  
mm = Month  
yy = Year

**Detail-A**

	<p>Construction Details For Foundations</p>		
	<p>PLAN DATE: OCTOBER 2018</p>	<p>DESIGNED BY: C.B. COGDILL</p>	
<p>PREPARED BY: N. BITTING</p>	<p>REV. NO. 1</p>	<p>COMMENTS: Revised Foundation Tag Details</p>	<p>INIT. N.B.</p>
<p>SCALE: NONE</p>	<p>DATE: 5/11/2015</p>	<p>SIGNATURE: <i>Debra C. Sarker</i></p>	<p>DATE: 10/11/2017</p>

11-001-2017-08:37  
 S:\15650\156501\156501.dgn  
 156501.dgn  
 Design Section  
 Section Eastern  
 Region  
 Sheets 2016-2014  
 Sig.M7 Std.  
 Construction Detail  
 IIS-Strain Poles.dgn  
 10/11/2017