


INPUT PAGE 2 ASSIGNMENT PROGRAMMING DETAIL FOR ALTERNATE PHASING - LOOP 1A

(program controller as shown below)

- NOTES: 1. THIS PROGRAMMING APPLIES FOR INPUT PAGE 2 ONLY. INPUT PAGE 1 WILL USE STANDARD DEFAULT SETTINGS. THIS PROGRAMMING IS NECESSARY FOR PROPER DETECTOR OPERATION DURING ALTERNATE PHASING OPERATION.
2. THE FIRST TASK THIS PROGRAMMING ACCOMPLISHES IS THE DISABLING OF INPUT #10 (DETECTOR 26) SO THAT A VEHICLE CALL WILL NOT BE PLACED TO PHASE 6 DURING ALTERNATE PHASING OPERATION. THE SECOND TASK THIS PROGRAMMING ACCOMPLISHES IS THAT IT REASSIGNS DETECTOR 51 TO INPUT #18 SO THAT THE DELAY ON LOOP 1A CAN BE REDUCED FROM 15 SECONDS TO 0 SECONDS.


FROM MAIN MENU PRESS '5' (INPUTS), THEN PRESS 'NEXT' TO GET TO INPUT PAGE '2'. PRESS THE '+' KEY UNTIL INPUT 10 IS REACHED.

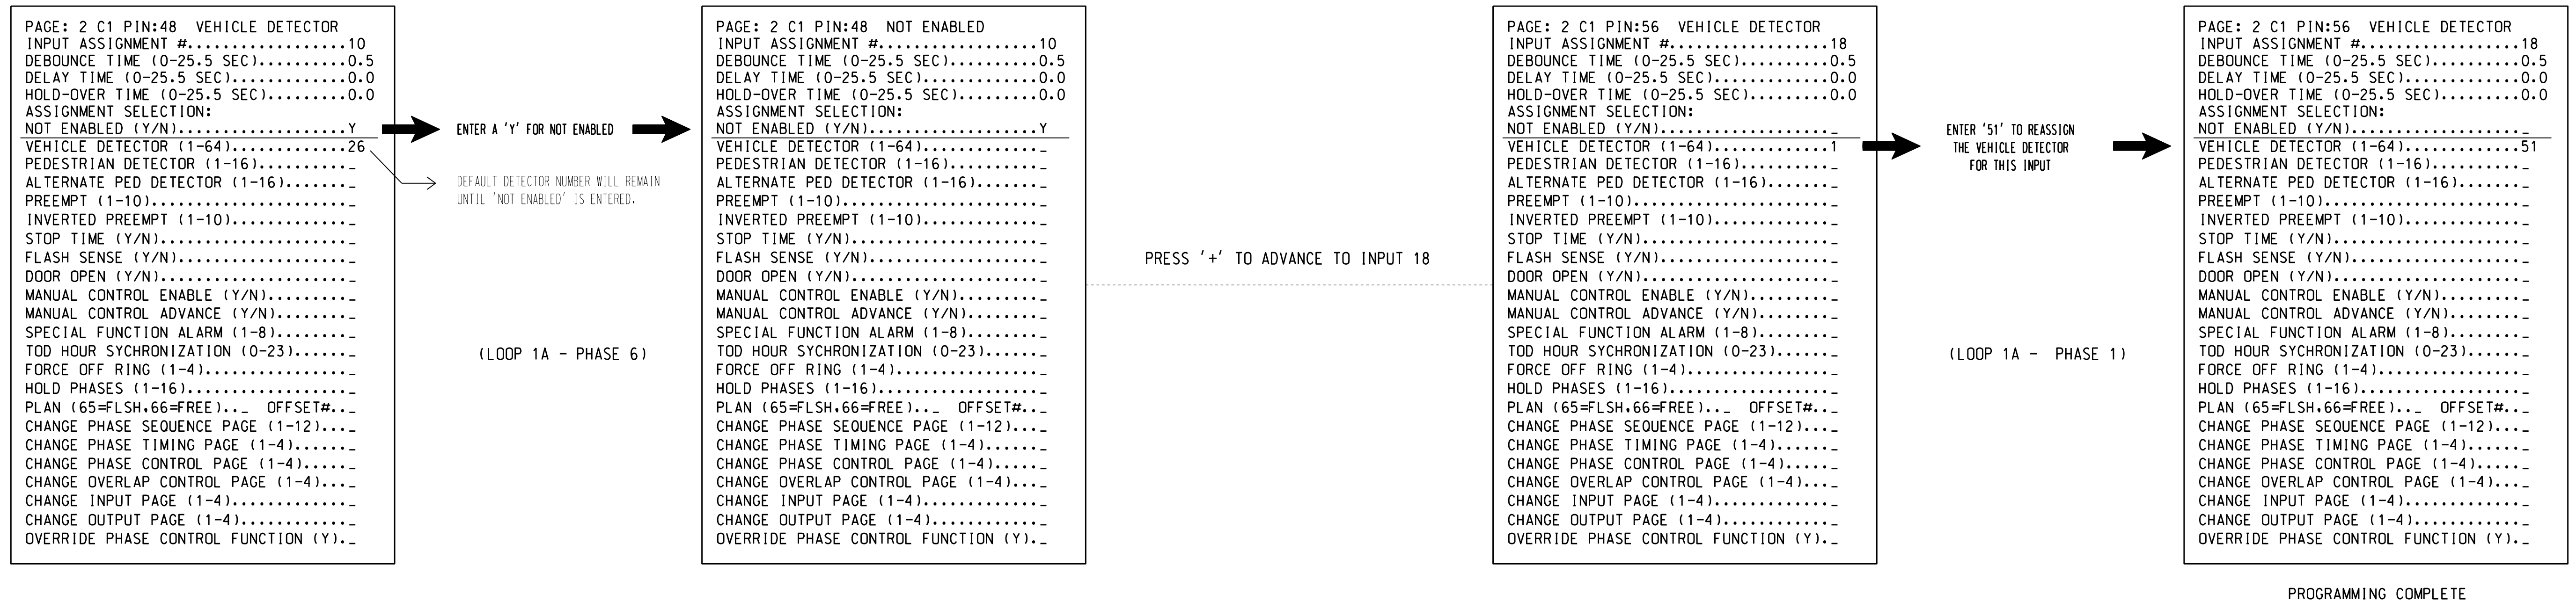

SPECIAL DETECTOR PROGRAMMING DETAIL - LOOP 1A (ALT.)

(program controller as shown below)

FROM MAIN MENU PRESS '7' (DETECTORS), THEN PRESS '1' FOR VEHICLE DETECTORS. PRESS THE '-' KEY TO GET TO VEHICLE DETECTOR #51.

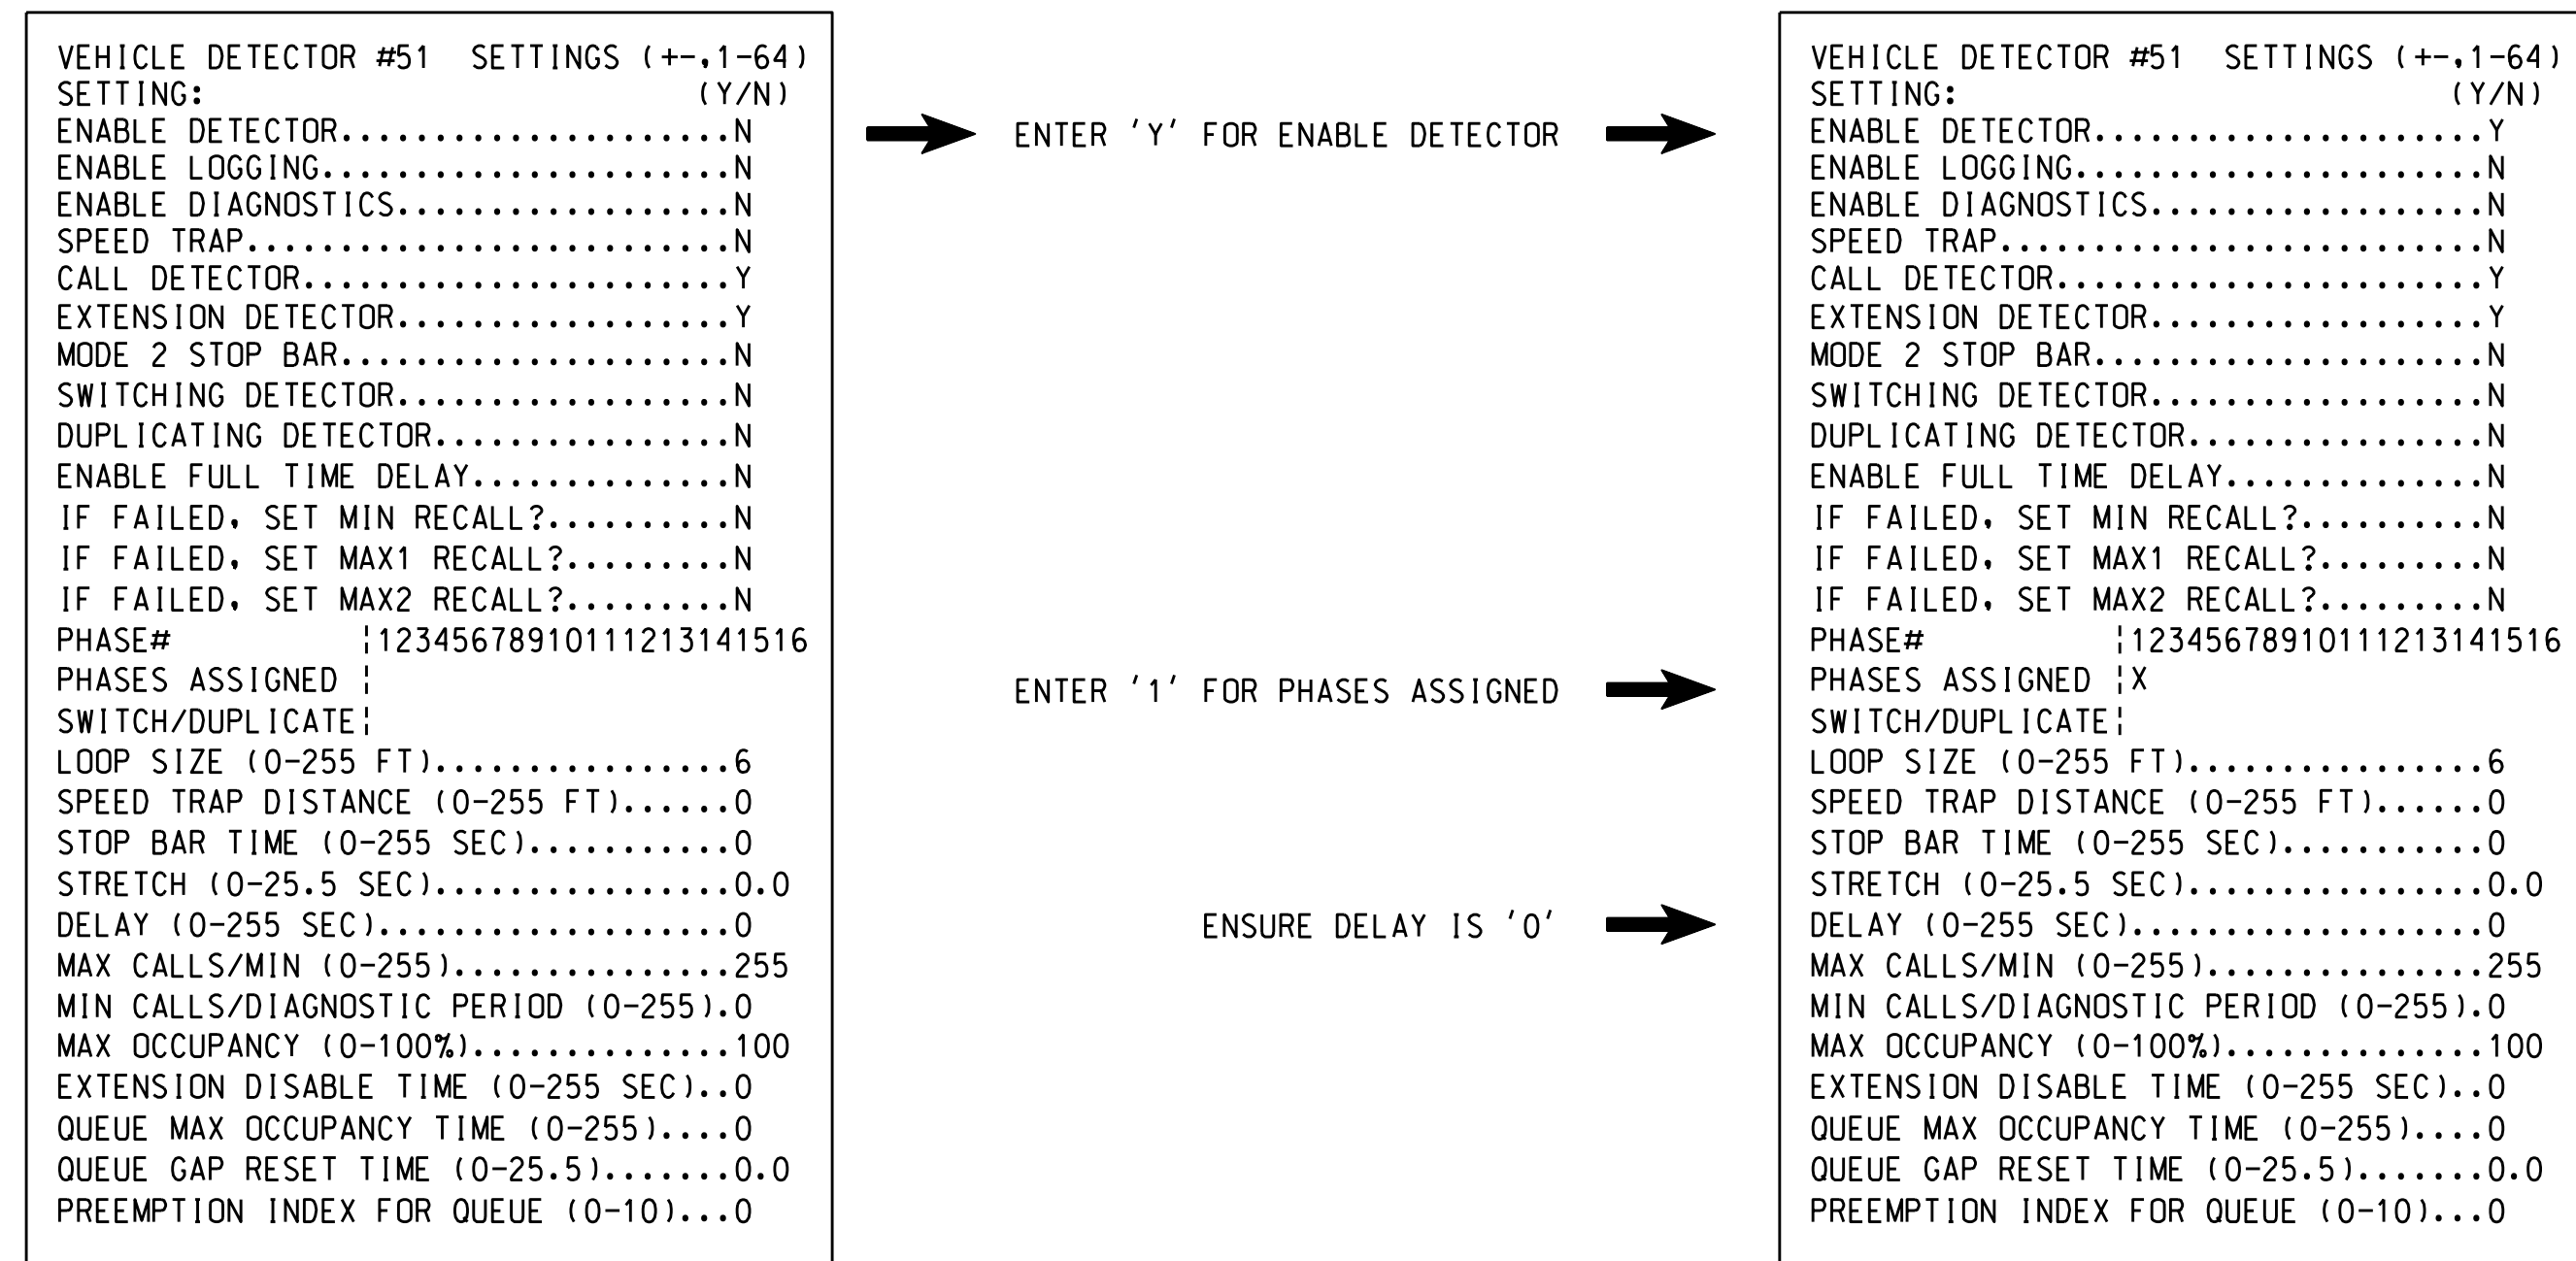

NOTE: DETECTOR IS PROGRAMMED PER THE INPUT FILE CONNECTION AND PROGRAMMING CHART SHOWN ON SHEET 1.

ELECTRICAL DETAIL SHEET 3 OF 4

**NC 24 (Sunset Avenue)
at
US 421-701/NC 24 SB Ramps**

PLAN DATE: Sep 2018		REVIEWED BY: D.J. Darity	
PREPARED BY: D.J. Darity		MAN PROJECT NO.: 8522-07	
REVISIONS	INIT.	DATE	
Remove MP#14, Install MP#1 and Relocate Cabinet (ZZ)	DJ	11/10/2019	

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 03-1068

DESIGNED: Sep 2019

SEALED: 9/12/2019

REVISED: 11/2/2021

Not a certified document as to the Original Document but only as to the Revisions - This document originally issued and sealed by Donald J. Darity, 1913, on 9/12/2019. This document is only certified as to the revisions.

SIC. INVENTORY NO. 03-1068

08-NOV-2021 11:49 S:\MIS\SSU\115_Signal\work\hgr\oups\51g_Mon\2019\031068_sm.ele_2021.mcd-dgn 222109