


ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

- From Main Menu select 2. CONTROLLER
- From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

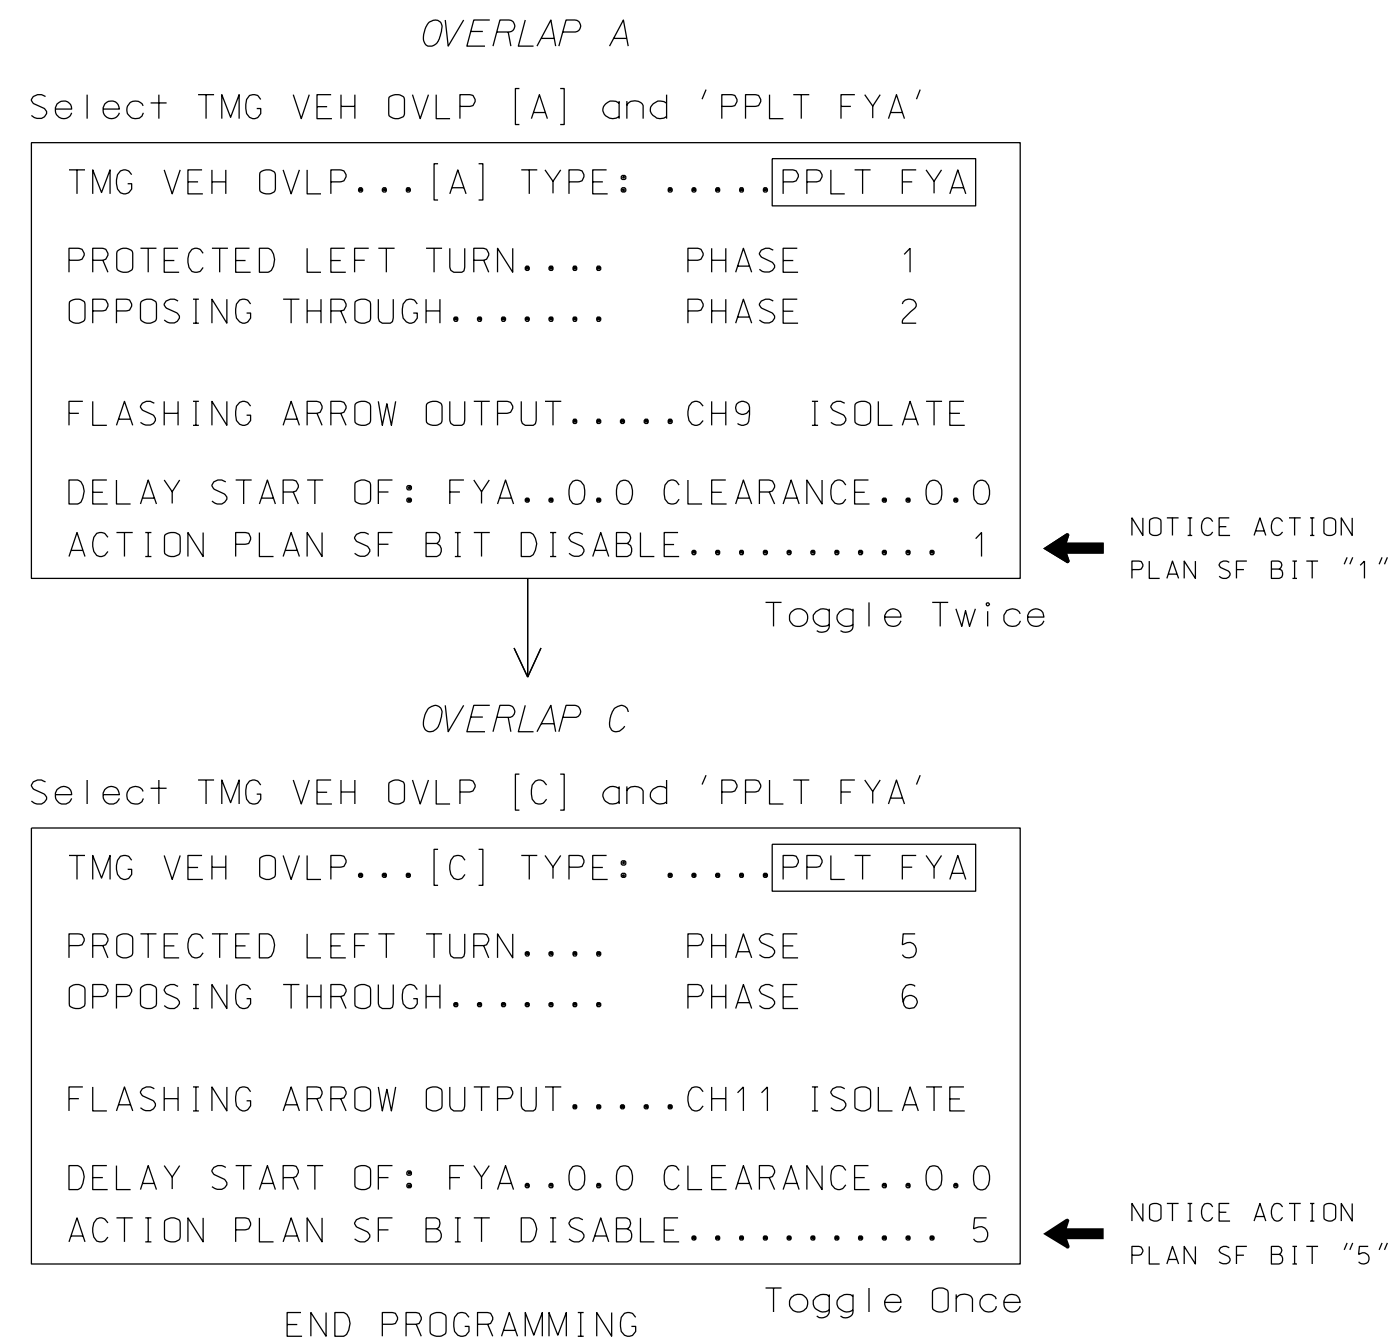


ECONOLITE ASC/3-2070 VEHICLE DETECTOR SETUP PROGRAMMING DETAIL FOR ALTERNATE PHASING LOOPS 1A, 5A

(program controller as shown)

IMPORTANT!


Program detectors per the input file connection and programming chart shown on sheet 1 before proceeding.

- From Main Menu select 8. UTILITIES
- From UTILITIES Submenu select 1. COPY/CLEAR
- Copy from DETECTOR PLAN "1" to DETECTOR PLAN "2".


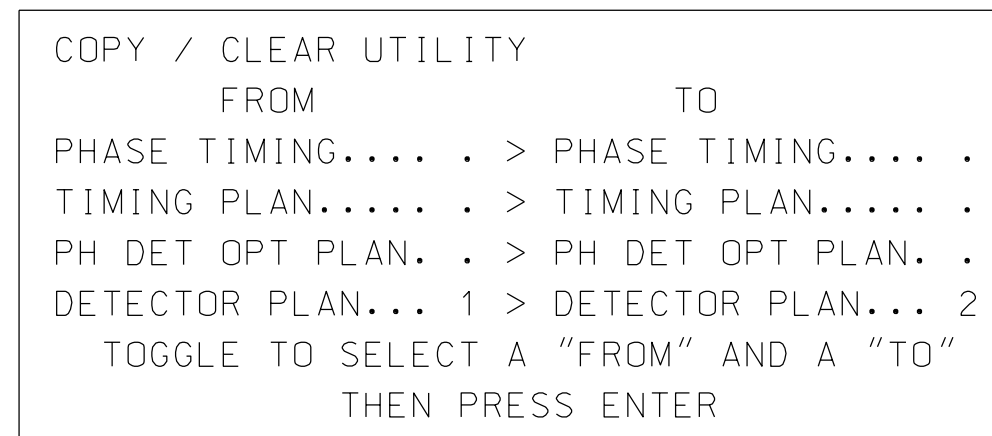


- From Main Menu select 6. DETECTORS
- From DETECTOR Submenu select 2. VEHICLE DETECTOR SETUP
- Place cursor in VEH DET PLAN [] position and enter "2".

- Place cursor in VEH DETECTOR [] position and enter "1".
- Set delay time to "3".

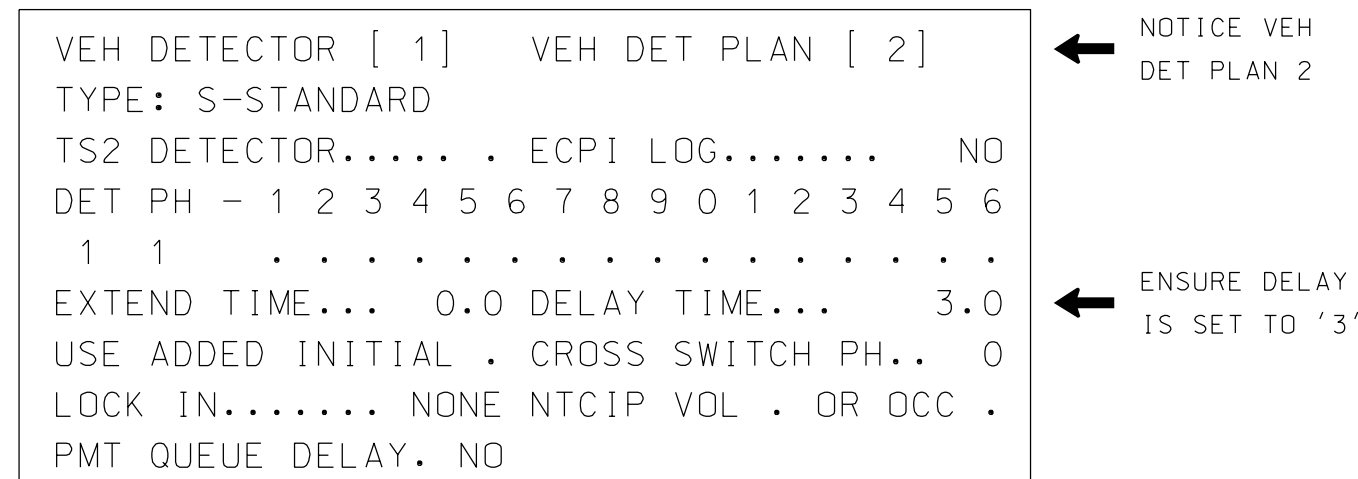

- Place cursor in VEH DETECTOR [] position and enter "26".
- Set assigned phase to "0".

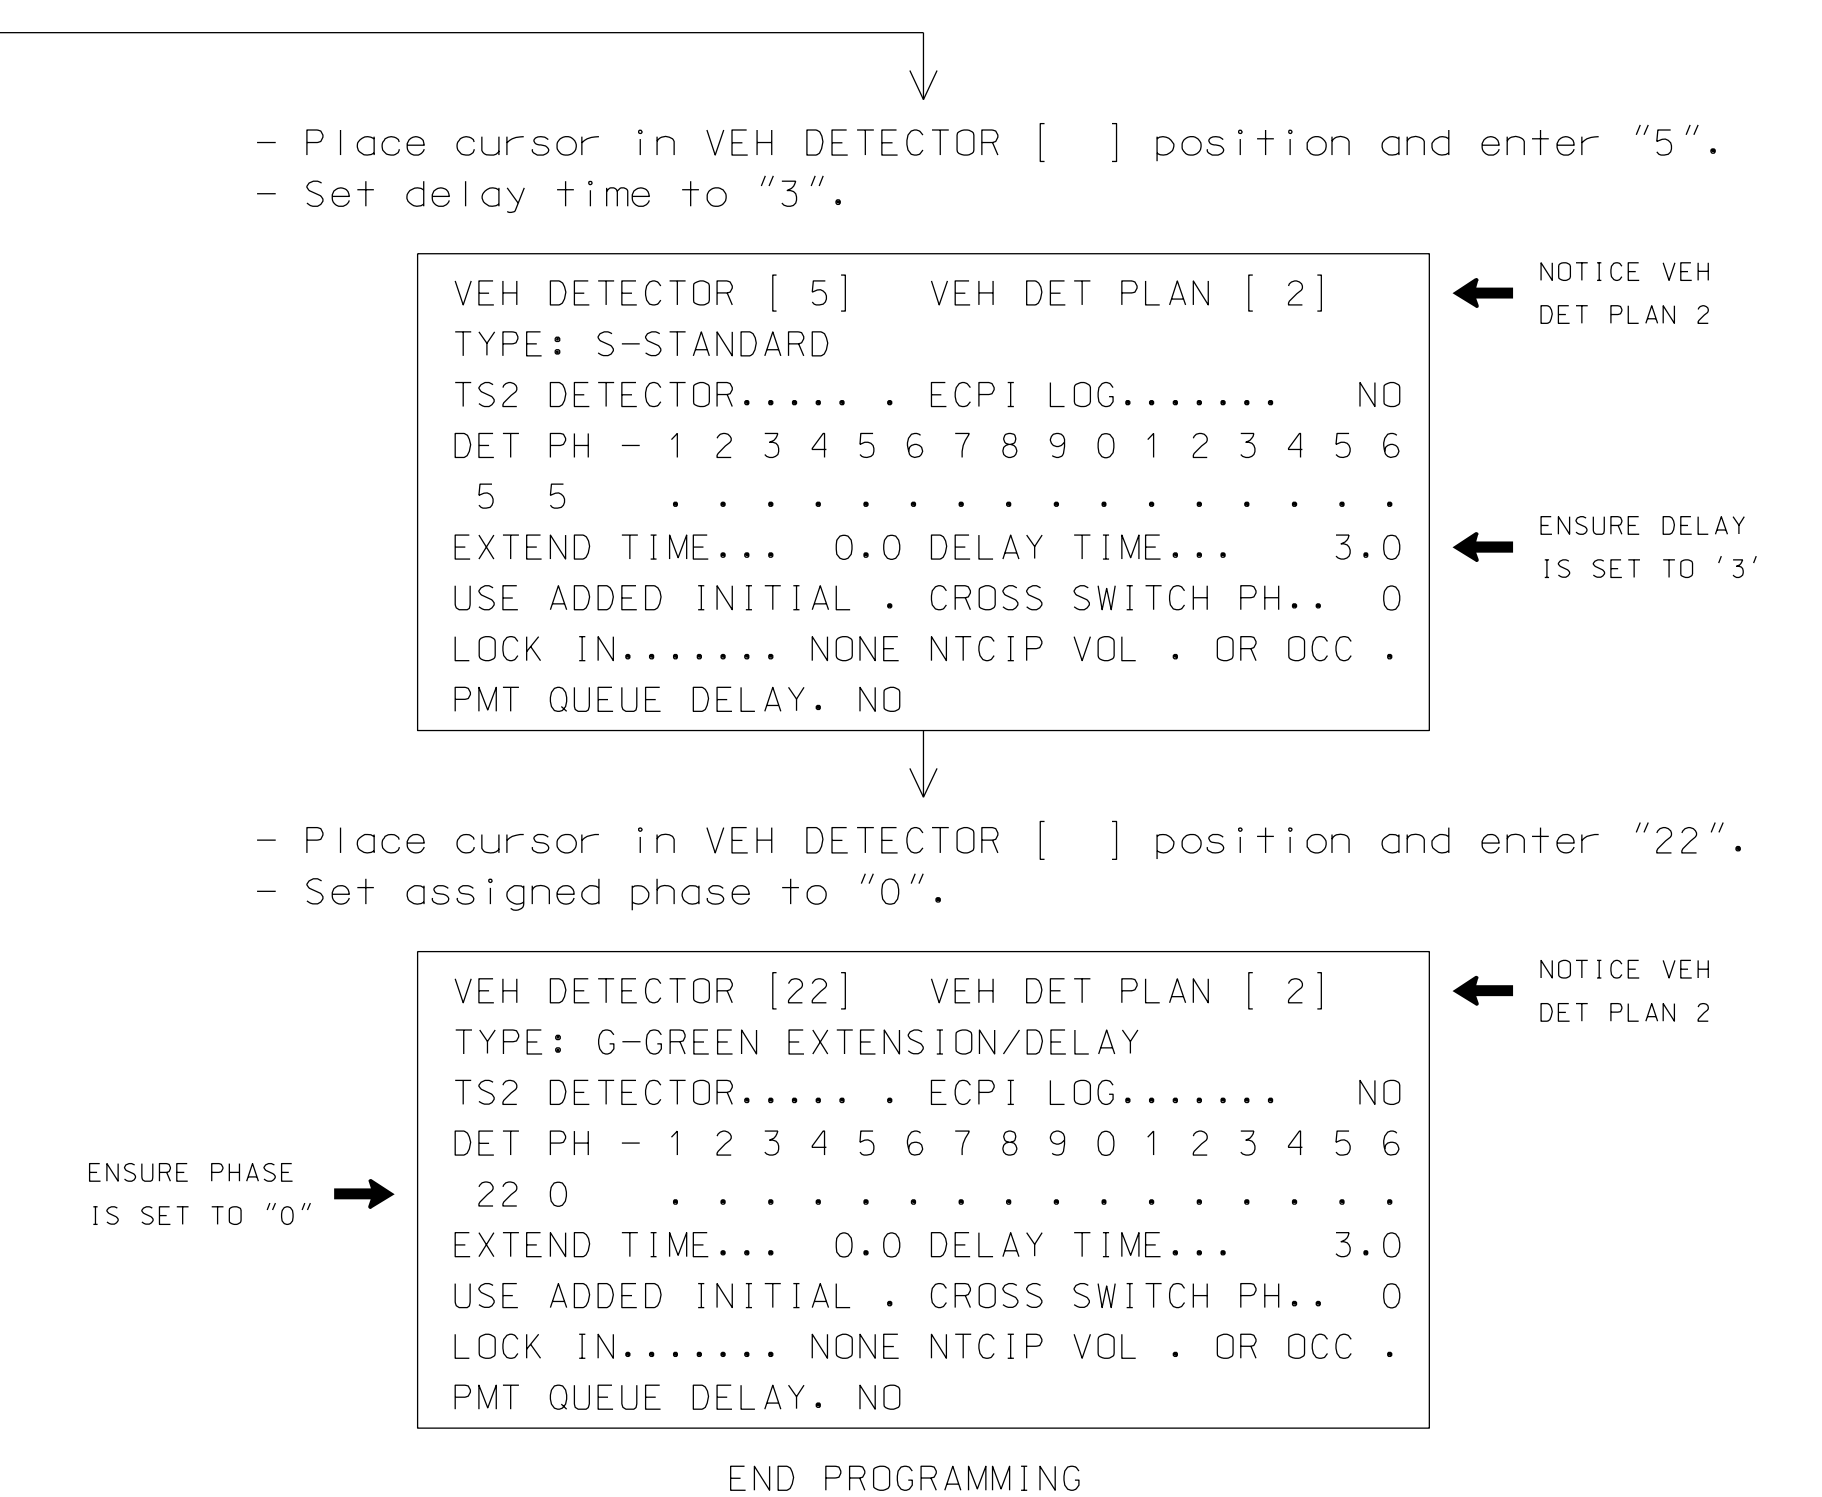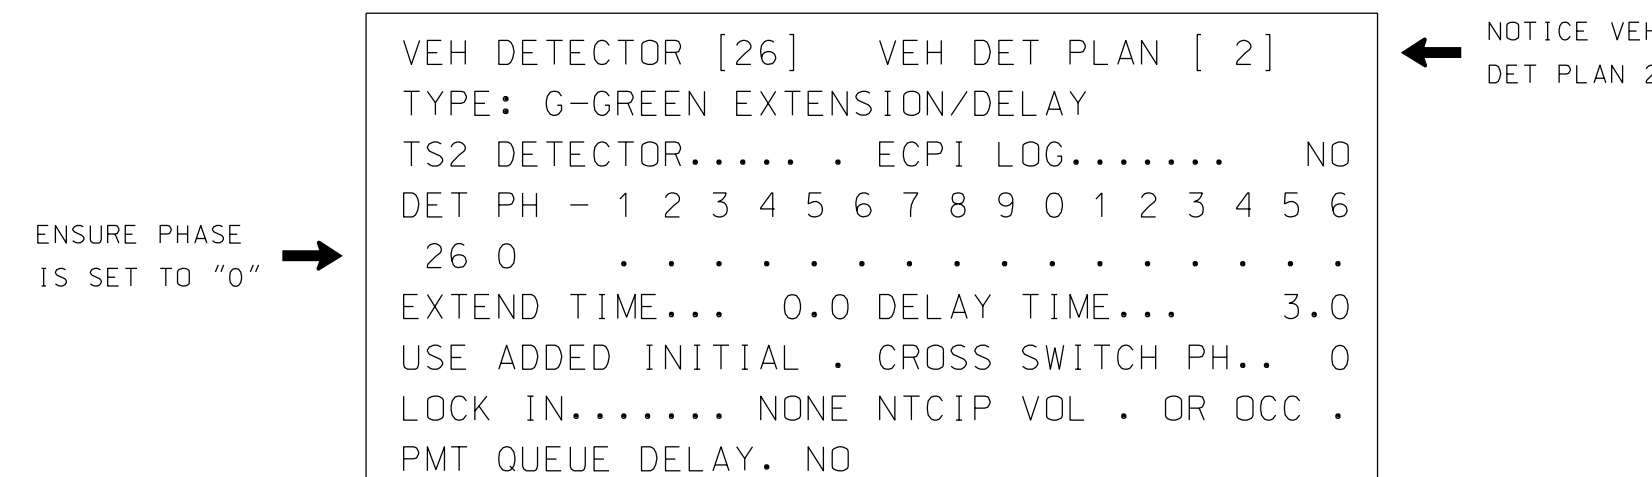

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 07-1708
DESIGNED: September 2019
SEALED: 10/16/2019
REVISED: N/A



Electrical Detail-Final Upgrade (Sheet 2 of 3)

<p>ELECTRICAL AND PROGRAMMING DETAILS FOR:</p> <p>Prepared for the Offices of:</p> <p>750 N. Greenfield Pkwy, Garner, NC 27529</p>	<p>US 70 (Burlington Rd) at SR 2826 (Birch Creek Rd) and Publix Driveway</p> <p>Division 7 Guilford County McLeansville</p> <p>PLAN DATE: September 2019 REVIEWED BY: M.L. Stygles</p> <p>PREPARED BY: J. Ma REVIEWED BY:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REVISIONS	INIT.	DATE				<p>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</p> <p>SEAL</p> <p>DocuSigned by: <i>M.L. Stygles</i> 10/16/2019</p> <p>SIG. INVENTORY NO. 07-1708</p>
REVISIONS	INIT.	DATE						