



DEFAULT PHASING DIAGRAM

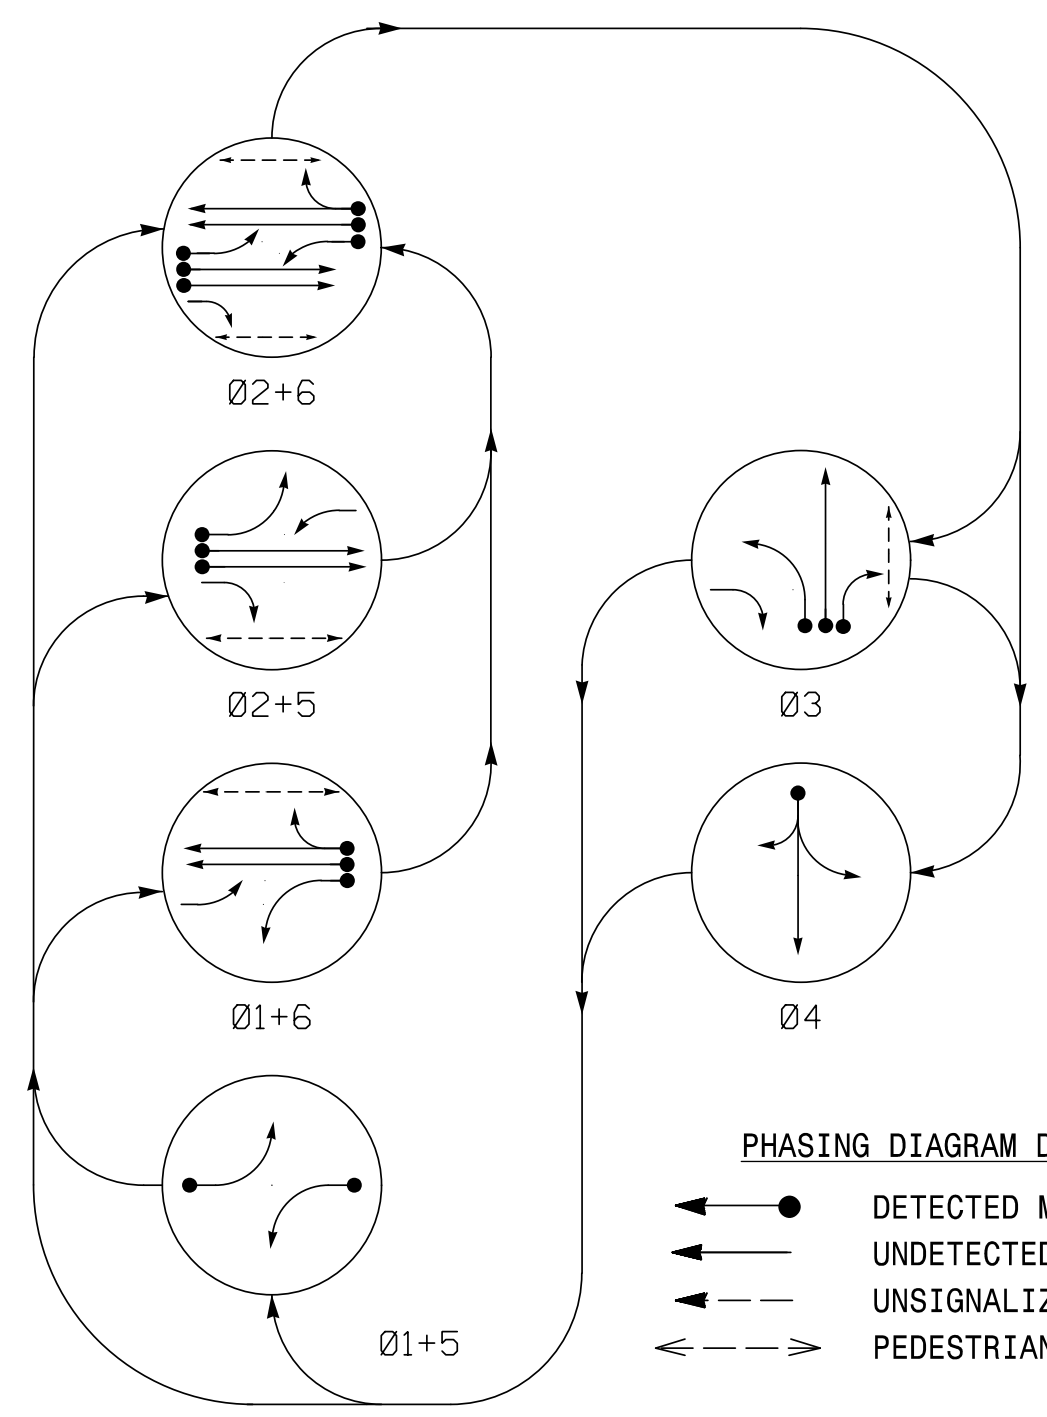

DEFAULT EV PREEMPT PHASES (Medium Priority)

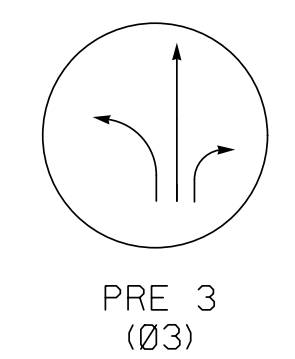


DEFAULT PHASING TABLE OF OPERATION

SIGNAL FACE	PHASE										
	Ø 1 + 5	Ø 1 + 6	Ø 2 + 5	Ø 2 + 6	Ø 3	Ø 4	P	F	L	F	L
11	←	←	←	←	←	←	←	←	←	←	←
21	R	R	G	G	R	R	R	R	Y		
22	R	R	G	G	R	R	R	R	Y		
31	R	R	R	R	G	R	G	R			
32, 33, 34	R	R	R	R	G	R	G	R			
41	R	R	R	R	G	R	R	R			
42	R	R	R	R	G	R	R	R			
51	←	←	←	←	←	←	←	←	←	←	←
61, 62	R	G	R	G	R	R	R	R	Y		
P21, P22	DW	DW	W	W	DW	DW	DW	DRK			
P31, P32	DW	DW	DW	DW	W	DW	DW	DRK			
P61, P62	DW	W	DW	W	DW	DW	DRK				


ALTERNATE PHASING TABLE OF OPERATION

SIGNAL FACE	PHASE										
	Ø 1 + 5	Ø 1 + 6	Ø 2 + 5	Ø 2 + 6	Ø 3	Ø 4	P	F	L	F	L
11	←	←	←	←	←	←	←	←	←	←	←
21	R	R	G	G	R	R	R	R	Y		
22	R	R	G	G	R	R	R	R	Y		
31	R	R	R	R	G	R	G	R			
32, 33, 34	R	R	R	R	G	R	G	R			
41	R	R	R	R	G	R	R	R			
42	R	R	R	R	G	R	R	R			
51	←	←	←	←	←	←	←	←	←	←	←
61, 62	R	G	R	G	R	R	R	R	Y		
P21, P22	DW	DW	W	W	DW	DW	DW	DRK			
P31, P32	DW	DW	DW	DW	W	DW	DW	DRK			
P61, P62	DW	W	DW	W	DW	DW	DRK				

ALTERNATE PHASING DIAGRAM

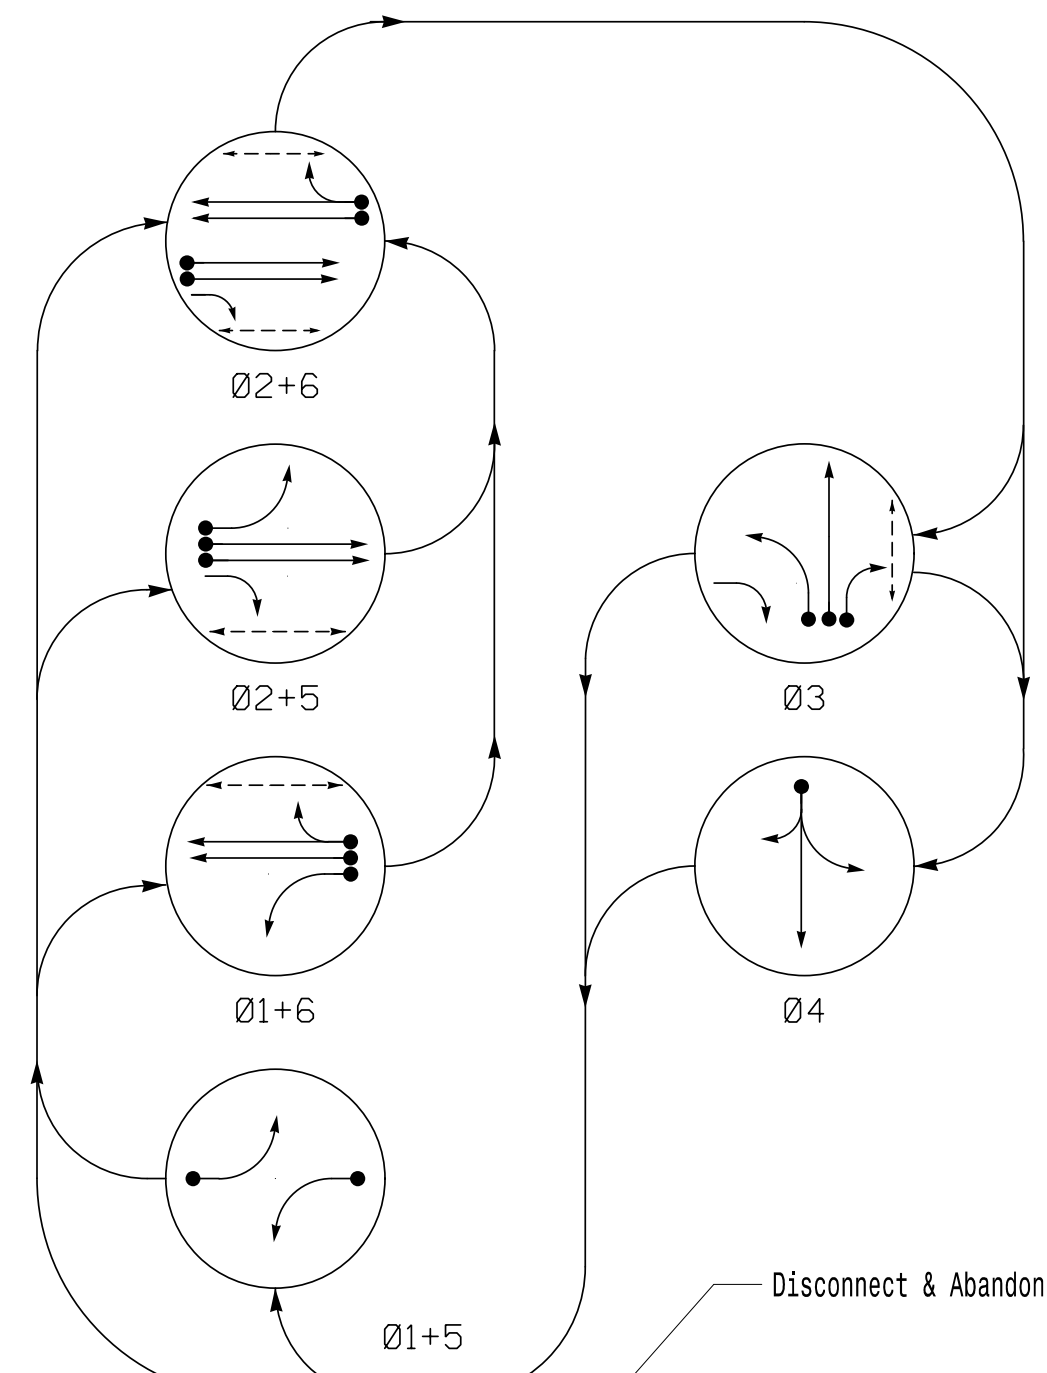

ALTERNATE EV PREEMPT PHASES (Medium Priority)

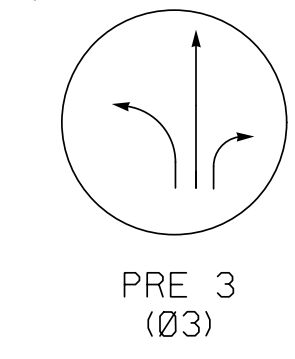



6 Phase Fully Actuated w/ Alternate Phasing Operation and Emergency Vehicle Preemption Gastonia Signal System

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018 and "Standard Specifications for Roads and Structures" dated January 2018.
- Do not program signal for late right flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- The order of phase 3 and phase 4 may be reversed.
- Set all detector units to presence mode.
- In the event of loop replacement, refer to the current ITS and Signal Design Manual and submit a Plan of Record to the Signal Design Section.
- Locate new cabinet so as not to obstruct sight distance of vehicles turning right on red.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Pavement markings are existing.
- The City Engineer or their representative will determine the hours of use for each phasing plan.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values shall supersede these values.
- Install new cabinet on the existing cabinet foundation.
- All new cabinets and base extenders shall be black in color. See Project Special Provisions for details.
- Disconnect and abandon existing loops 2C, 2D, 6C, and 6D.
- Reposition existing signal head 62.
- Install GPS emergency preemption system per manufacturer's instructions to achieve preemption needed, as shown in phasing diagram.
- Reconnect lead-in cable to separate loops 2A, 2B, 6A, and 6B, as shown.
- Existing signal heads 22 and 23 have been relabeled to 21 and 22, respectively.
- City system data:
Controller Asset: #0636

SIGNAL FACE I.D.

All Heads L.E.D.

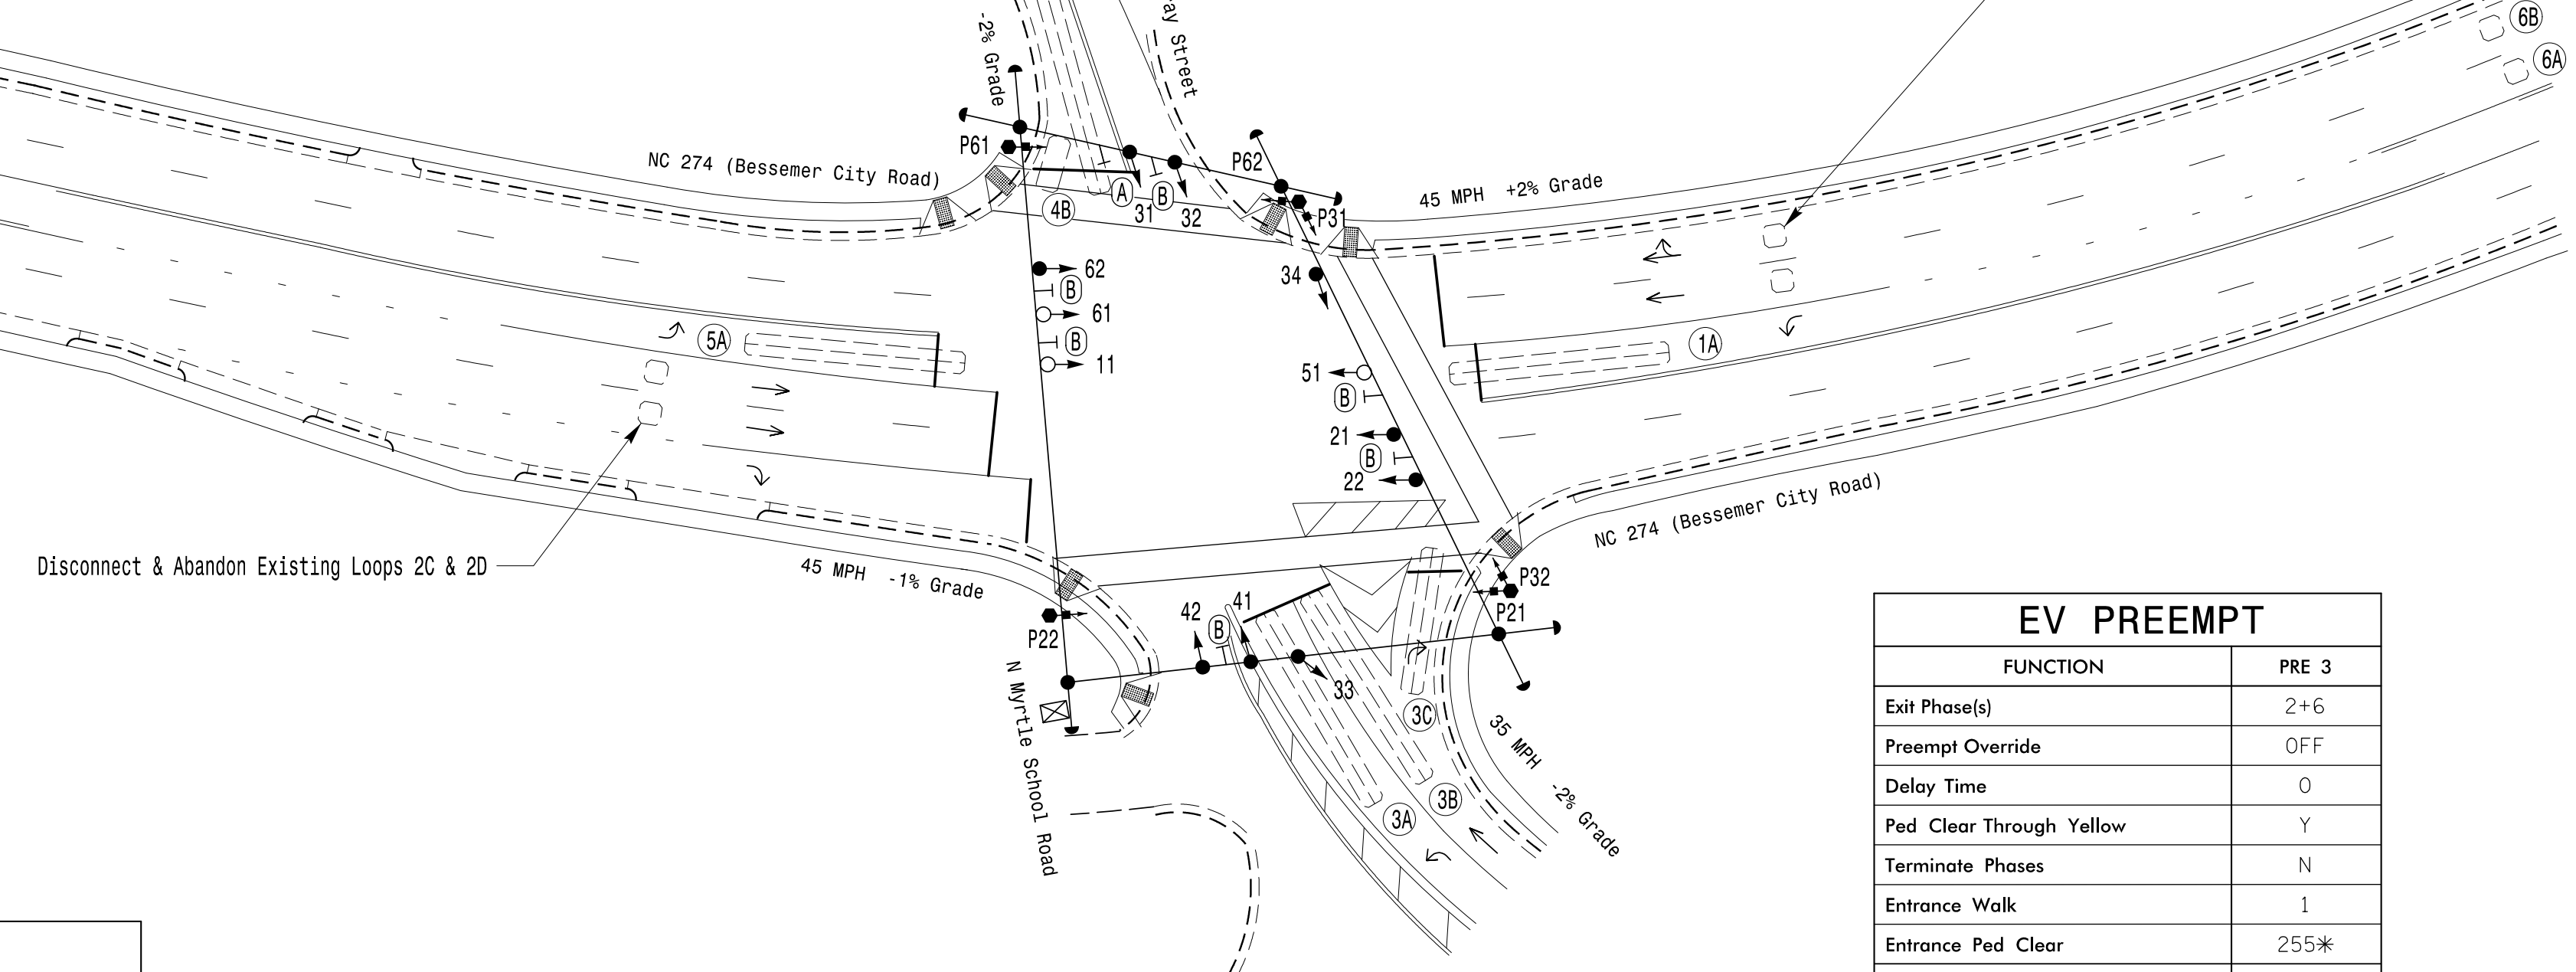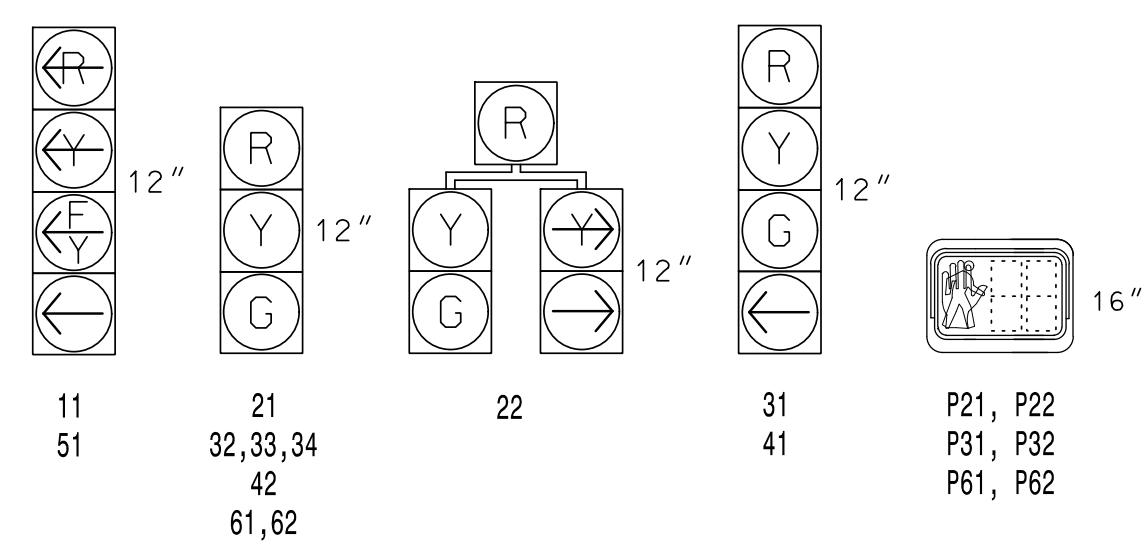

EV PREEMPT

FUNCTION	PRE 3
Exit Phase(s)	2+6
Preempt Override	OFF
Delay Time	0
Ped Clear Through Yellow	Y
Terminate Phases	N
Entrance Walk	1
Entrance Ped Clear	255*
Entrance Min Green	1
Entrance Yellow Change	25.5*
Entrance Red Clear	25.5*
Minimum Dwell Time	7
Preempt Input Extension Time **	2
Preempt Max Time	120
Exit Yellow Change	25.5*
Exit Red Clear	25.5*

* Time defaults to time used for phase during normal operation.
** Program Timing on GPS Detection Unit.

LEGEND

PROPOSED	EXISTING

TIMING CHART

FEATURE	PHASE					
	1	2	3	4	5	6
Min Green *	7	12	7	7	7	12
Walk *	-	7	7	-	-	7
Ped Clear	-	30	22	-	-	18
Veh. Extension *	1.0	6.0	1.0	1.0	1.0	6.0
Max 1 *	15	55	15	20	15	55
Yellow	3.0	4.6	4.0	4.0	3.0	4.6
Red Clear	3.2	1.9	3.0	2.6	2.6	1.9
Red Revert	2.0	2.0	2.0	2.0	2.0	2.0
Actuations B4 Add *	-	-	-	-	-	-
Seconds / Actuation *	-	1.5	-	-	-	1.5
Max Initial *	-	34	-	-	-	34
Time Before Reduction *	-	15	-	-	-	15
Time To Reduce *	-	30	-	-	-	30
Minimum Gap	-	3.0	-	-	-	3.0
Locking Detector	-	X	-	-	-	X
Recall Position	-	MIN RECALL	-	-	-	MIN RECALL
Dual Entry	-	-	-	-	-	-
Simultaneous Gap	X	X	X	X	X	X


DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	PROGRAMMING							
					PHASE	CALLING	EXTEND TIME	DELAY TIME	USE ADDED INITIAL	TYPE	LOOP SYSTEM NEW CARD	
1A	6X60	+5	2-4-2	-	1	Yes	-	10*	-	N	-	Y
					6#	Yes	-	3	-	G	-	Y
2A	6X6	300	EXIST	-	2	Yes	-	-	X	N	-	Y
2B	6X6	300	EXIST	-	2	Yes	-	-	X	N	-	Y
3A	6X60	0	2-4-2	-	3	Yes	-	-	-	N	-	Y
3B	6X60	0	2-4-2	-	3	Yes	-	-	-	N	-	Y
3C	6X40	+5	2-4-2	-	3	Yes	-	15	-	N	-	Y
4A	6X60	+5	2-4-2	-	4	Yes	-	5	-	N	-	Y
4B	6X15	+5	EXIST	-	4	Yes	-	10	-	N	-	Y
5A	6X60	+5	2-4-2	-	5	Yes	-	10*	-	N	-	Y
					2#	Yes	-	3	-	G	-	Y
6A	6X6	300	EXIST	-	6	Yes	-	-	X	N	-	Y
6B	6X6	300	EXIST	-	6	Yes	-	-	X	N	-	Y

* Reduce Delay to 3 seconds during Alternate Phasing operation.
Disable Phase call for loop during Alternate Phasing operation.

Signal Upgrade

PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
NC License #0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

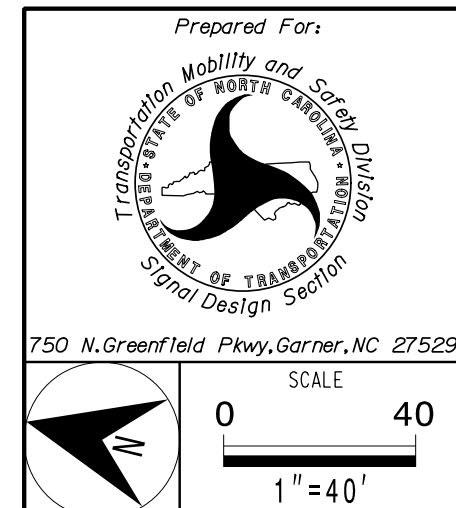

NC 274 (Bessemer City Road) at Arkray St. & Myrtle School Road

Division 12 Gaston County Gastonia

PLAN DATE: May 2021 REVIEWED BY: SL Phillips

PREPARED BY: CF Davis REVIEWED BY: KP Baumann

REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Seal of the State of North Carolina Professional Engineer
K. P. BAUMANN
SEAL 044434
ENGINEER

Disciplined by: [Signature]
DATE: 3/11/2022
SIGNATURE: [Signature]
DATE: [Signature]
SIG. INVENTORY NO. 12-0636

3/9/2022 11:14:12 AM DanHilleb.Cur1 ***K:\meyer-horn.com\SE-RAL\MRAL_TIP\DK-LTS\01\036569 Gastonia Signal System\Signal\SW54 - Signal Design\NC120836-2021.dgn