


### 18 CHANNEL IP CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)



REMOVE DIODE JUMPERS 1-5, 1-6, 1-15, 2-5, 2-6, 2-13, 2-15, 3-16, 5-13, 6-13, 6-15, AND 13-15.

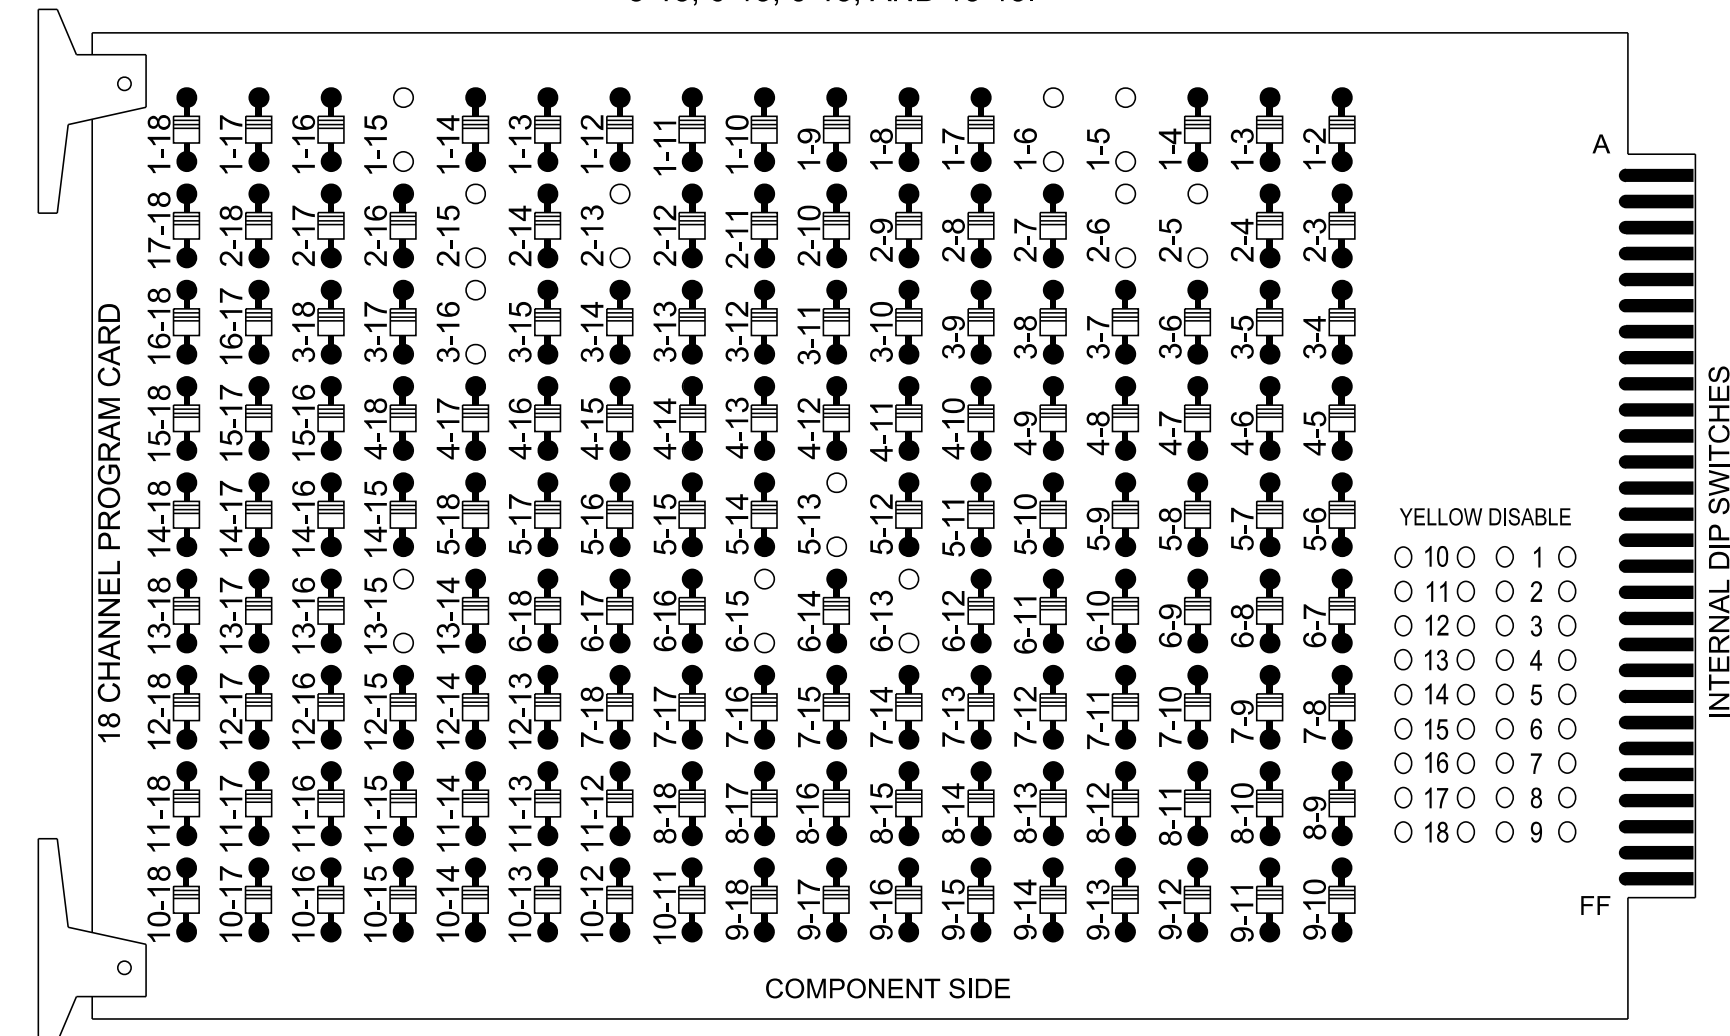

REMOVE JUMPERS AS SHOWN

**NOTES:**

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that the Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

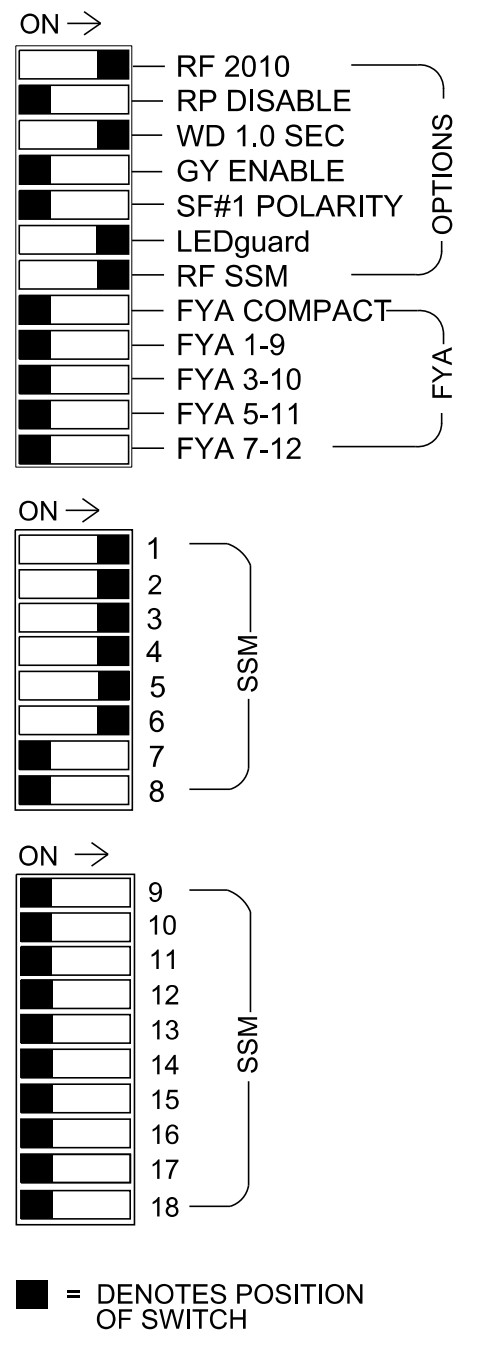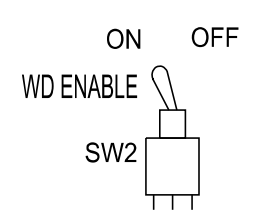

### NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
2. Program controller to start up in phase 2 Green Walk and 6 Green Walk.
3. If signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
4. The cabinet and controller are part of a Temporary Time Based Coordination System.

### EQUIPMENT INFORMATION

Controller.....2070LX  
 Cabinet.....332 w/ Aux  
 Software.....Q-Free MAXTIME  
 Cabinet Mount.....18 With Aux. Output File  
 Load Switches Used.....S1, S2, S3, S4, S5, S7, S8, S9, S12  
 Phases Used.....1, 2, 2PED, 3, 3PED, 4, 5, 6, 6PED  
 Overlaps.....NONE


### SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	3 PED	OL1	OL2	SPARE	OL3	OL4	SPARE
SIGNAL HEAD NO.	11,12	21, 22,23	P21, P22	31	32	62	41	42,43	NU	51,52	32	61,62	P61, P62	NU	NU	P31, P32	NU	NU
RED		128		116	116		101	101					134					
YELLOW		129		117	117		102	102					135					
GREEN		130		118	118		103	103					136					
RED ARROW	125									131								
YELLOW ARROW	126				117					132	132							
FLASHING YELLOW ARROW																		
GREEN ARROW	127			118	118	103				133	133							
Hand icon			113										119				110	
Walking person icon			115										121				112	

NU = Not Used

### INPUT FILE POSITION LAYOUT

(front view)

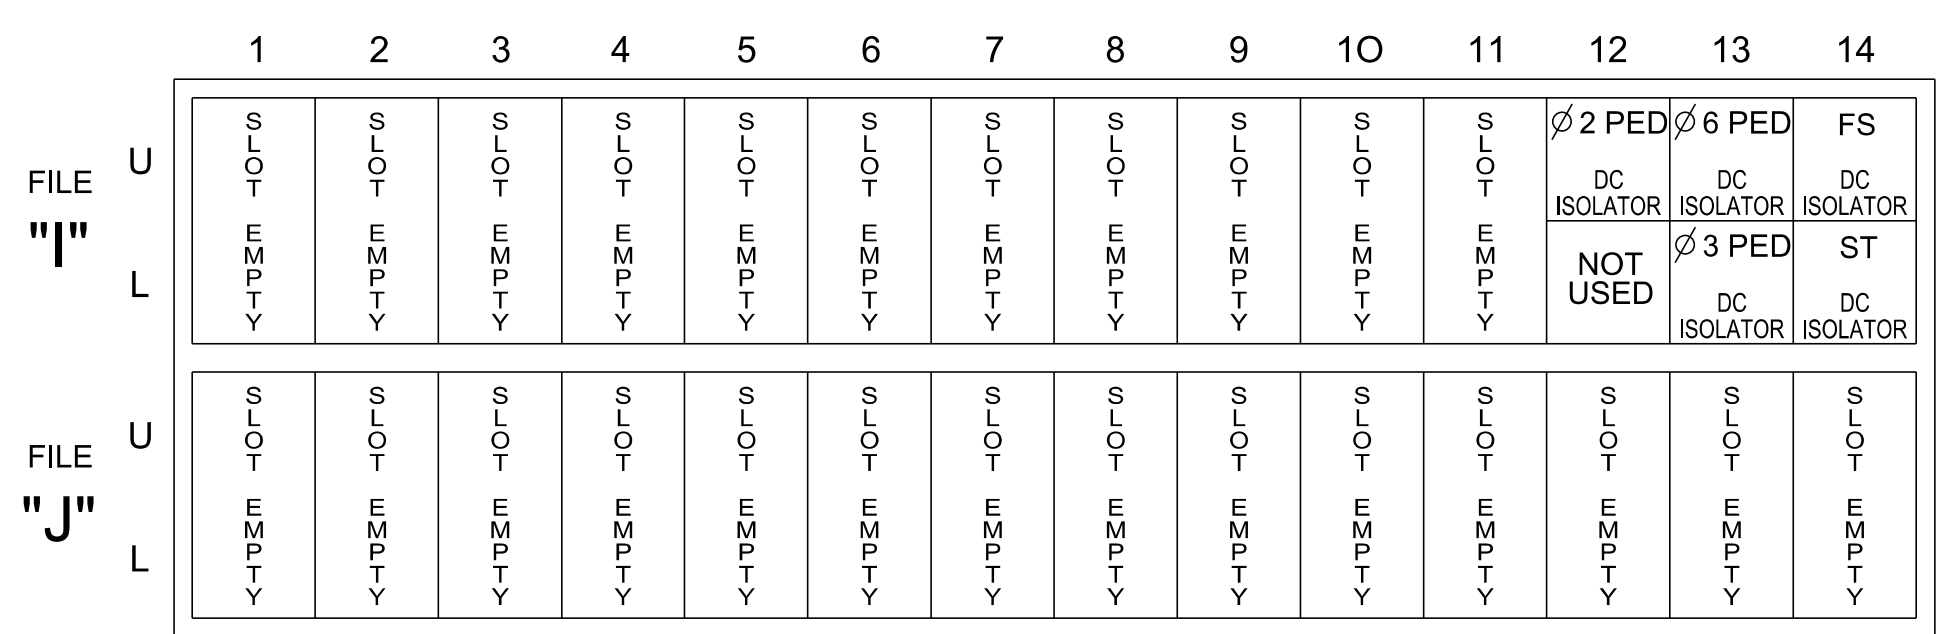


EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE  
 ST = STOP TIME

### INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT POINT	DETECTOR NO.	CALL PHASE	DELAY TIME	EXTEND TIME	EXTEND	ADDED INITIAL	CALL	DELAY DURING GREEN
PED PUSH BUTTONS												
P21,P22	TB8-4,6	I12U	67	33	2	PED 2						
P31,P32	TB8-8,9	I13L	70	36	8	PED 3						
P61,P62	TB8-7,9	I13U	68	34	6	PED 6						

NOTE:  
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS I12 AND I13.

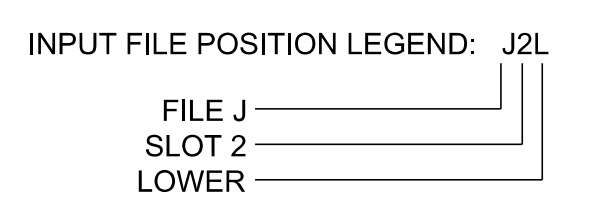

### SPECIAL DETECTOR NOTE

Install a multizone microwave detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer -approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 14-0798T6  
 DESIGNED: May 2023  
 SEALED: May 4, 2023  
 REVISED: \_\_\_\_\_

### COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

Temporary Signal 6 - TCP Phase VI, Step 2  
 Electrical Detail - Sheet 1 of 2

Electrical and Programming Details For: **US 64-276 (Asheville Highway)**

Prepared for the Offices of:  
  
 NC FIRM LICENSE No: F-0493  
 1520 SOUTH BOULEVARD, SUITE 200  
 CHARLOTTE, NC 28203  
 (704) 752-0610

Division 14 Transylvania County Brevard

PLAN DATE: May 2023 REVIEWED BY: V. Kaiser

PREPARED BY: S.G. Haynie REVIEWED BY:

REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

DocuSigned by: **Steven G. Haynie** 5/4/2023

0633DCB9A0486 DATE

SIG. INVENTORY NO. 14-0798T6

5/4/2023 8:11:29 AM R:\IT\OFFICE\GIS\gnw\p\on\_Sheets\m5799\_s1g\_psh\_7-1\_140798T6.dwg