

PED 3 PROGRAMMING DETAIL

Front Panel
Main Menu >Controller >Detector >Ped Det Plans

Web Interface
Home >Controller >Detector Configuration >Pedestrian Detector

Plan 1

Detector	Description	Call Phase	Call Overlap
2		2	0
4		4	0
6		6	0
8		3	0

NOTICE PHASE 3 PED
ASSIGNED TO
DETECTOR 8 PED →

Front Panel
Main Menu >Controller >More>Channels>Channels Config

Web Interface
Home >Controller >Advanced IO>Channels>Channels Configuration

Channel Configuration

Channel	Control Type	Control Source	Flash Yellow	Flash Red	Flash Alt	MMU Channel
1	Phase Vehicle	1		X	X	1
2	Phase Vehicle	2	X			2
3	Phase Vehicle	3		X	X	3
4	Phase Vehicle	4		X		4
5	Phase Vehicle	5		X		5
6	Phase Vehicle	6	X		X	6
7	Phase Vehicle	7		X		7
8	Phase Vehicle	8		X	X	8
9	Overlap	1	X		X	9
10	Overlap	2		X	X	10
11	Overlap	3	X			11
12	Overlap	4		X		12
13	Phase Ped	2				13
14	Phase Ped	4				14
15	Phase Ped	6				15
16	Phase Ped	3				16
17	Overlap	5		X	X	17
18	Overlap	6		X		18

NOTICE PHASE 3 PED
ASSIGNED TO CHANNEL 16 →

OVERLAP PROGRAMMING

Front Panel
Main Menu >Controller >Overlap >Overlap Parameters/Overlap Timings

Web Interface
Home >Controller >Overlap Configuration >Overlaps

Overlap Plan 1

Overlap	Value
Overlap	4
Type	FYA 4 - Section
Included Phases	1,4
Modifier Phases	-
Trail Green	0
Trail Yellow	0.0
Trail Red	0.0

SEQUENCE DETAIL

Front Panel
Main Menu >Controller >Sequence & Phs Config>Sequences

Web Interface
Home >Controller >Sequence

Sequence 1

Ring	Sequence Data
1	1,2,a,3,4,b
2	6,5,a,7,8,b

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

COMPATIBILITY

Front Panel
Main Menu >Controller >Sequence & Phs Config>No Served Phase Plans

Web Interface
Home >Controller >Phase Configuration>No Served Phase Plans

Sequence 1


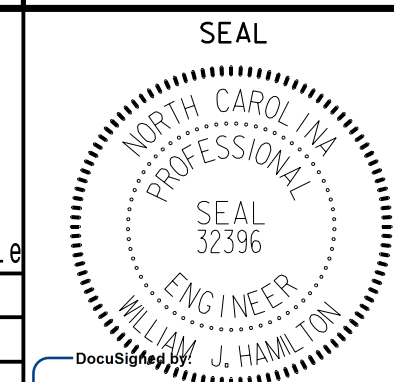
Phase	No Serve Phase
1	5
2	
3	
4	
5	
6	
7	
8	

ACCESSIBLE PEDESTRIAN SIGNAL (APS) INSTALLATION NOTES

1. Install push buttons and APS equipment per manufacturer's instructions.
2. Provide a dedicated cable to each push button per manufacturer's instructions.
3. If APS equipment is mounted in cabinet, use filtered power (i.e., Controller Receptacle) to power APS equipment. Do not use Equipment Receptacle, which is a GFCI outlet.
4. Never attempt to operate a standard contact closure push button with the APS system unless cabinet is re-wired for standard button operation or unless explicitly allowed by the manufacturer.
5. Place manufacturer's instructions in cabinet with cabinet prints, signal plans, and electrical details.

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 14-0689T3
DESIGNED: Apr 2023
SEALED: 04/11/2023
REVISED: N/A

Electrical Detail - Sheet 2 of 2
Temporary Design 3 - (TMP Phase III)

ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared for: 	US 276 (Russ Avenue) at Ingles Shopping Center / Long John Silver Drive Division 14 Haywood County Waynesville		SEAL  WILLIAM J. HAMILTON ENGINEER 04/11/2023 DATE
	PLAN DATE: April 2023 PREPARED BY: TS Popelka	REVIEWED BY: WJ Hamilton RKA PROJ. NO: 16085 (040)	