


NOTE: UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

NOTE: TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS



| | |
|--|--|
| PI Sta 23+76.11 $\Delta = 0^{\circ}08'22.6"$ (LT) $D = 0^{\circ}17'11.3"$ $L = 48.73'$ $T = 24.37'$ $R = 20,000.00'$ $SE=NC$ | PI Sta 28+79.25 $\Delta = 11^{\circ}18'25.7"$ (RT) $D = 5^{\circ}22'47.6"$ $L = 210.17'$ $T = 105.43'$ $R = 1,065.00'$ $*SE=SEE PLANS$ |
|--|--|

* DESIGN EXCEPTION REQUIRED FOR SUPERELEVATION

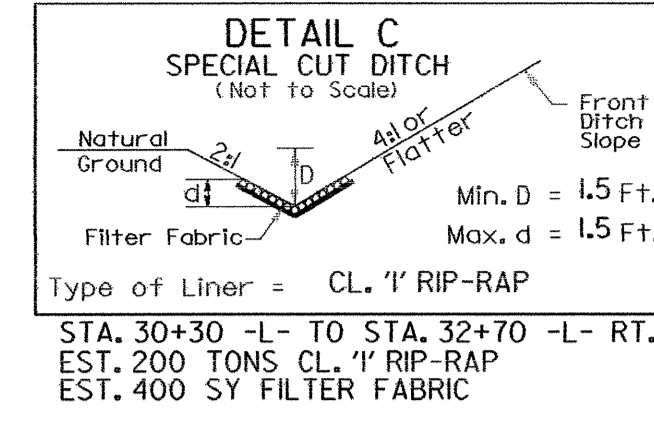

SHOULDER BERM GUTTER
 STA. 20+50.00 -L- TO STA. 25+43.00 -L- RT. & LT.
 STA. 27+87.00 -L- TO STA. 30+12.00 -L- LT.
 STA. 27+87.00 -L- TO STA. 30+24.50 -L- RT.
 SEE SHEET 2 AND STD. DRAWINGS

MATCHLINE -L- STA. 20+50, SEE SHEET 4

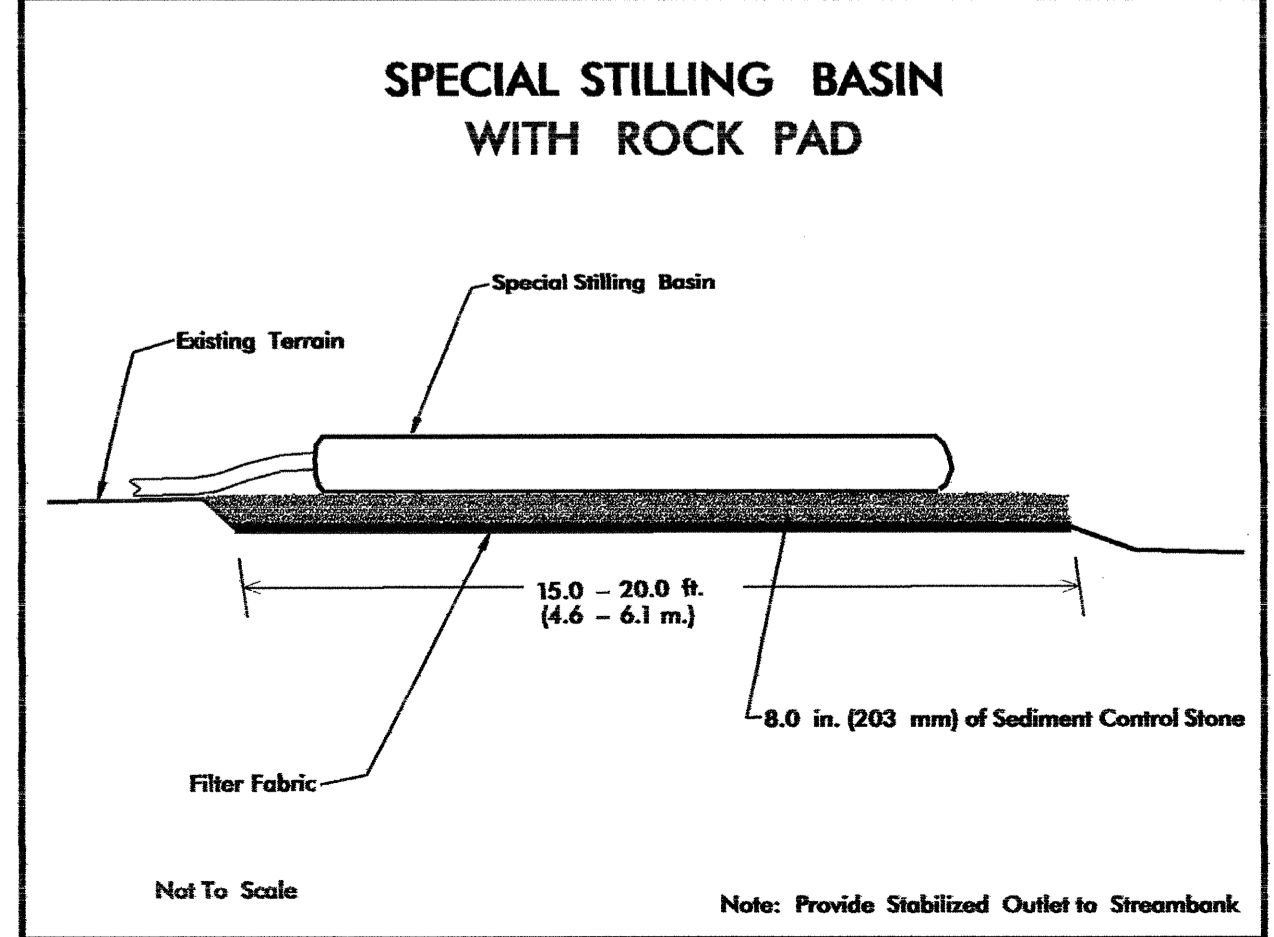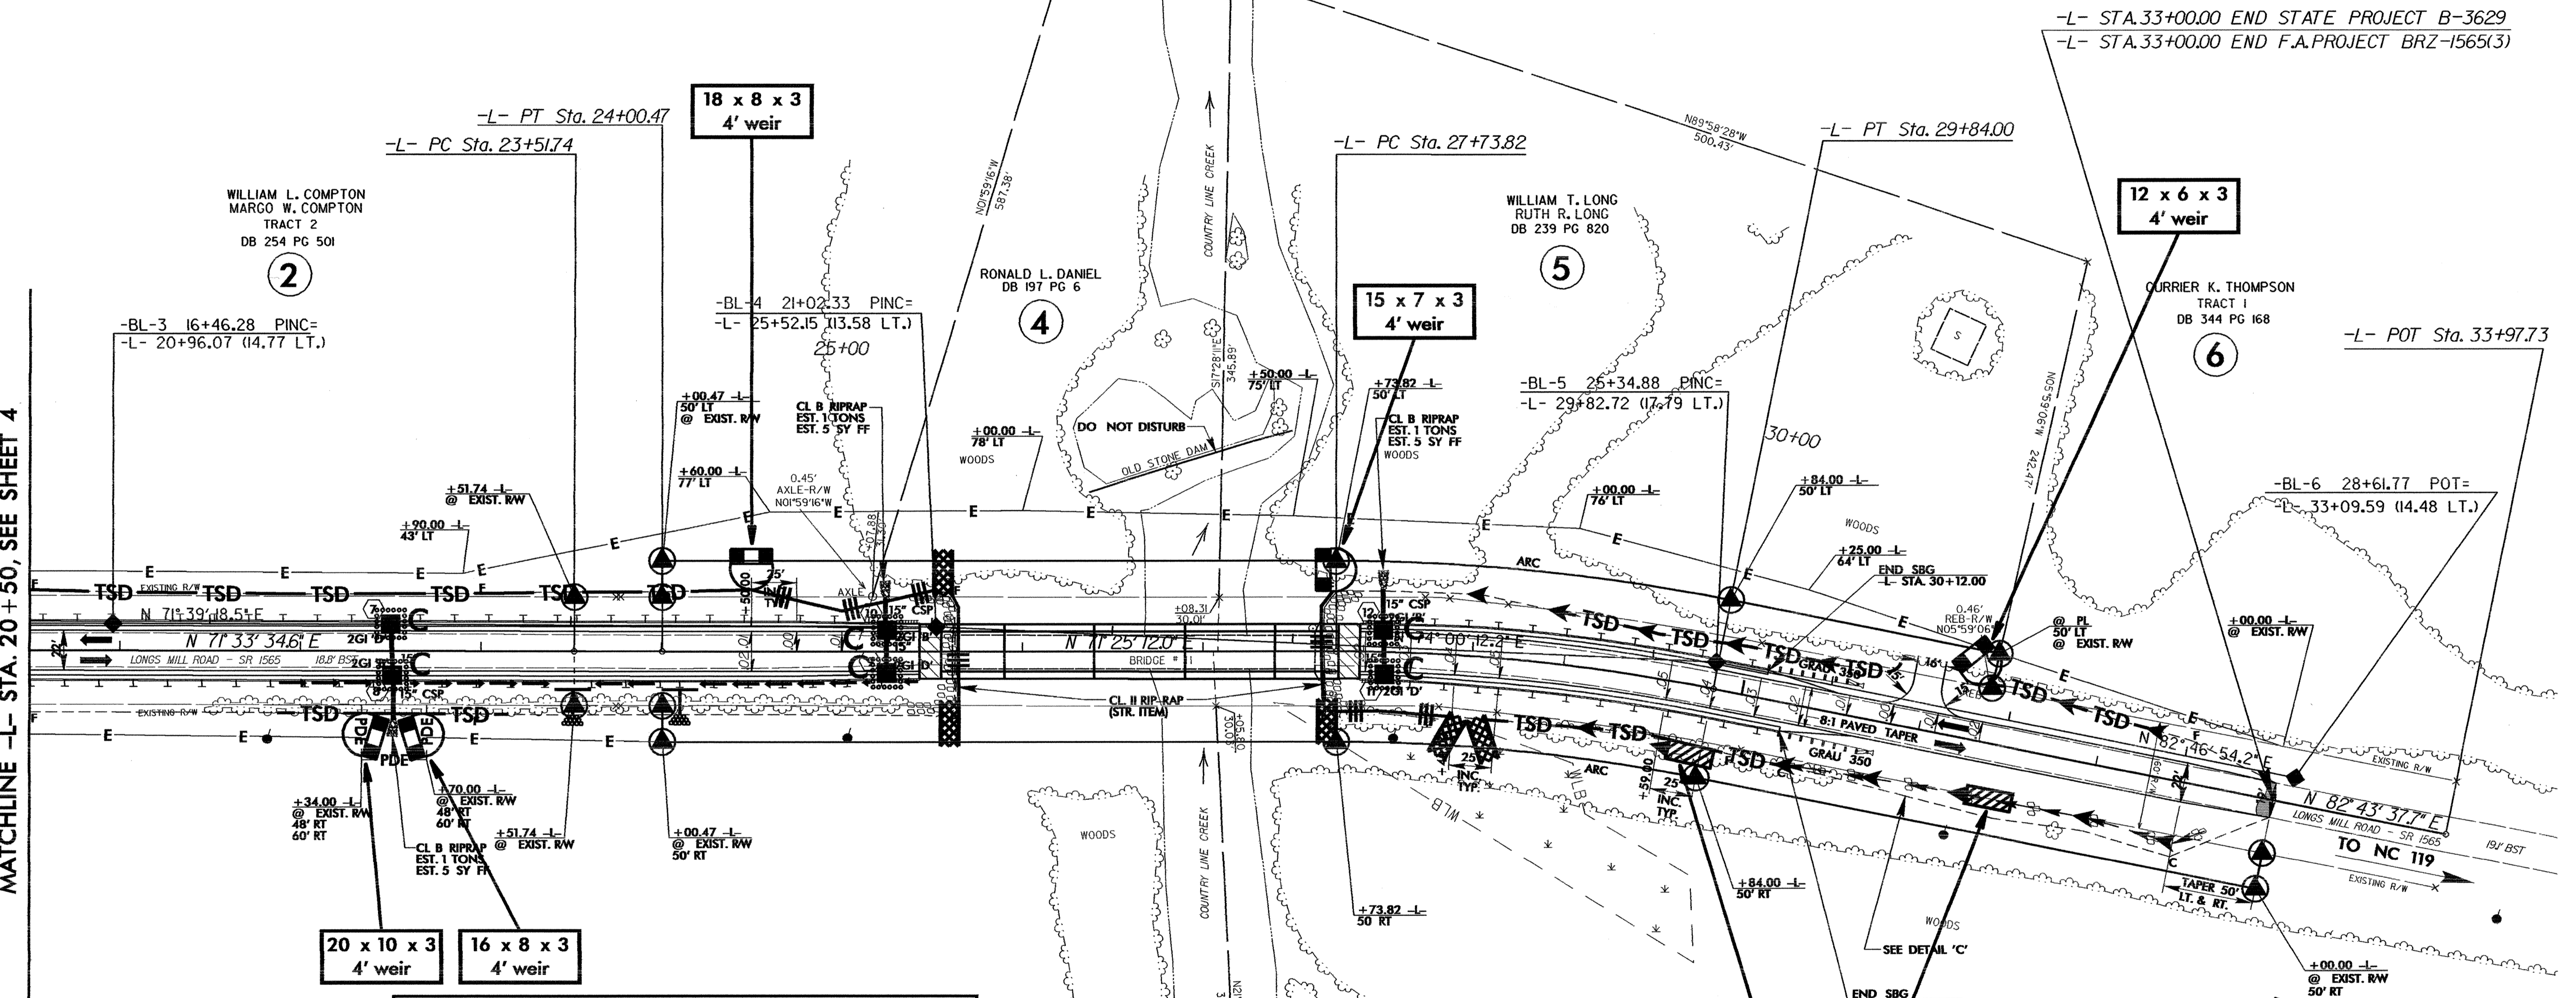

SEE SHEET 8 FOR -L- LINE PROFILE
 SEE SHEETS S-1 THRU S-5 FOR STRUCTURE PLANS