



PROJ. REFERENCE NO.	SHEET NO.
R-2206C	PM-1

FINAL PAVEMENT MARKING SCHEDULE				
SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
		PAINT (100MM)		
PA	WHITE EDGELINE (2X)		5120 M	
PI	YELLOW DOUBLE CENTER (2X)		5120 M	
				TOTAL 10,240 M
		MARKERS		
		PERMANENT RAISED PAVEMENT MARKERS		
MA	YELLOW & YELLOW		106 EA	
				TOTAL 106 EA

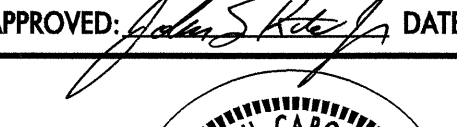
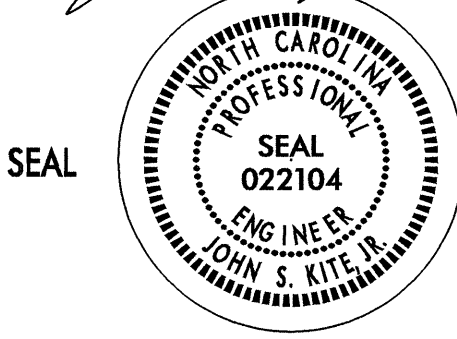
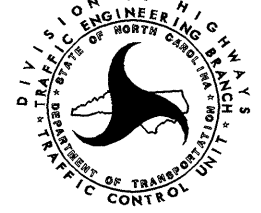
NOTE: FOR EACH PAINT PAVEMENT MARKING ITEM, 1X IMPLIES A SINGLE APPLICATION, 2X IMPLIES TWO APPLICATIONS, AND 3X IMPLIES THREE APPLICATIONS.

-Y11- AND -Y13-

FINAL PAVEMENT MARKING SCHEDULE				
SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
		THERMOPLASTIC (100mm, 2.3mm)		
TA	WHITE EDGELINE		1760 M	
				TOTAL 1760 M
		THERMOPLASTIC (100mm, 3.1mm)		
TI	YELLOW DOUBLE CENTER		2632 M	
				TOTAL 2632 M
		THERMOPLASTIC (200mm, 2.3mm)		
TT	YELLOW DIAGONAL		74 M	
				TOTAL 74 M
		MARKERS		
		PERMANENT RAISED PAVEMENT MARKERS		
MA	YELLOW & YELLOW		110 EA	
				TOTAL 110 EA

-Y14-

09-JUL-2004 14:32  
J:\TCP\R2206C\TC-dm01.dgn  
SCOOT5 AT TELC206428

APPROVED:  DATE: 7/12/04	FINAL PAVEMENT MARKING SCHEDULE	
	SCALE: 1:500	
	DATE: 05-10-04	
	DWG. BY: SBC	
	DESIGN BY: SBC	
REVIEWED BY: CLM	REVISIONS	