

PROJECT REFERENCE NO. B-3629	SHEET NO. EC-5/CONST.5
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER


NOTE: UTILIZE SPECIAL STILLING BASIN, AND TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN, WHERE APPLICABLE.

NOTE: TEMPORARY SILT FENCE SHALL BE INSTALLED A MINIMUM OF 3 FEET FROM TOE OF FILL IN WETLAND AREAS

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.



PI Sta 23+76.11 $\Delta = 0'08'' 22.6'' (LT)$ $D = 0'17'' 11.3''$ $L = 48.73'$ $T = 24.37'$ $R = 20,000.00'$ $SE=NC$	PI Sta 28+79.25 $\Delta = 1'18'' 25.7'' (RT)$ $D = 5'22'' 47.6''$ $L = 210.17'$ $T = 105.43'$ $R = 1,065.00'$ $*SE=SEE PLANS$
--	---

\* DESIGN EXCEPTION REQUIRED FOR SUPERELEVATION

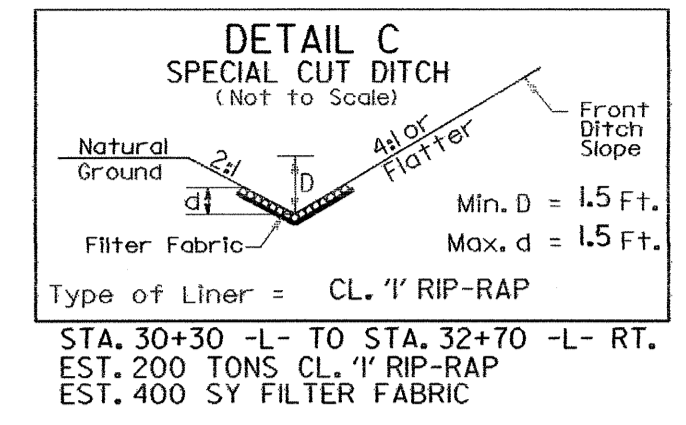

SHOULDER BERM CUTTER  
 STA. 20+50.00 -L- TO STA. 25+43.00 -L- RT. & LT.  
 STA. 27+87.00 -L- TO STA. 30+42.00 -L- LT.  
 STA. 27+87.00 -L- TO STA. 30+24.50 -L- RT.  
 SEE SHEET 2 AND STD. DRAWINGS

MATCHLINE -L- STA. 20 + 50, SEE SHEET 4

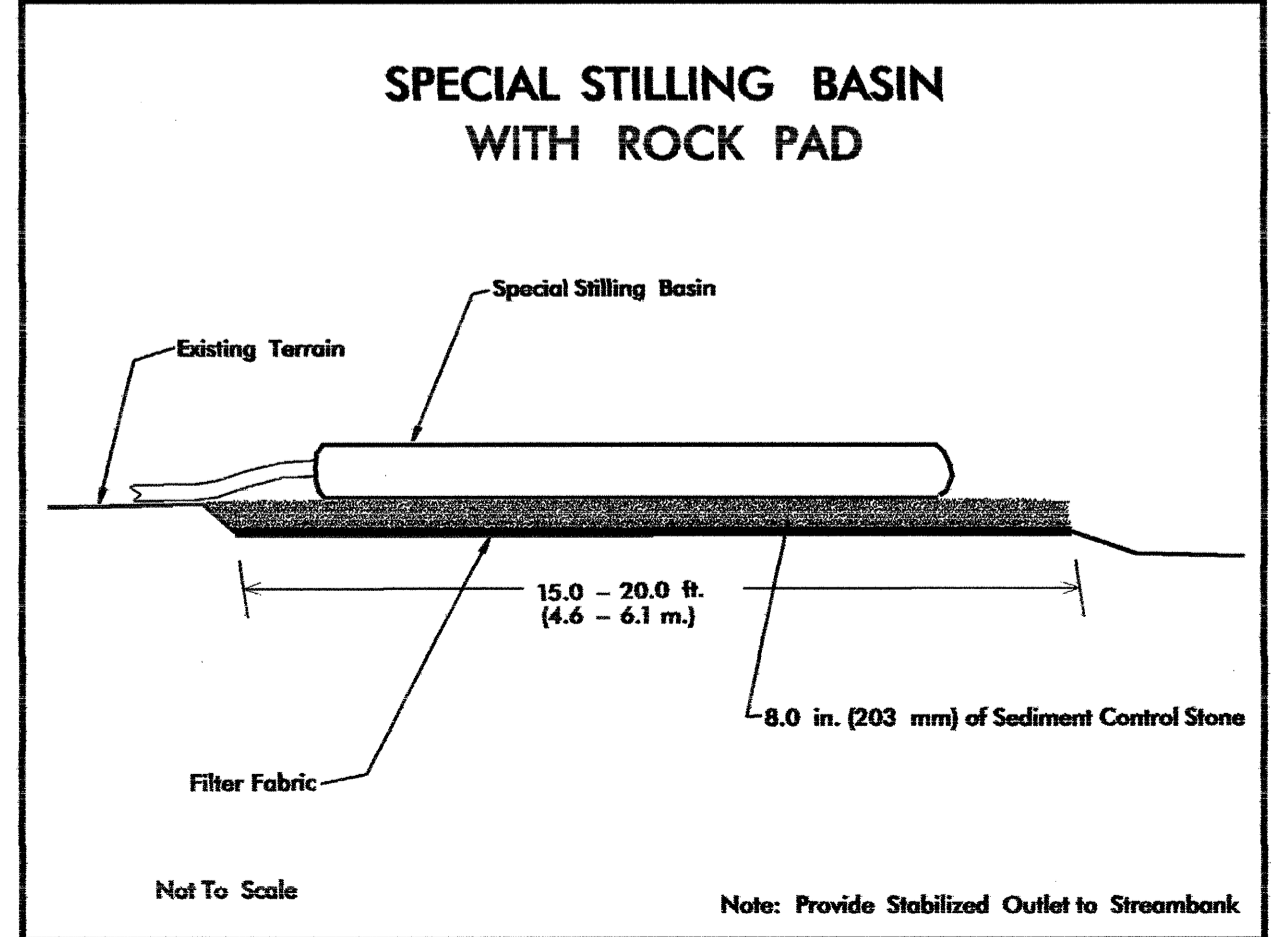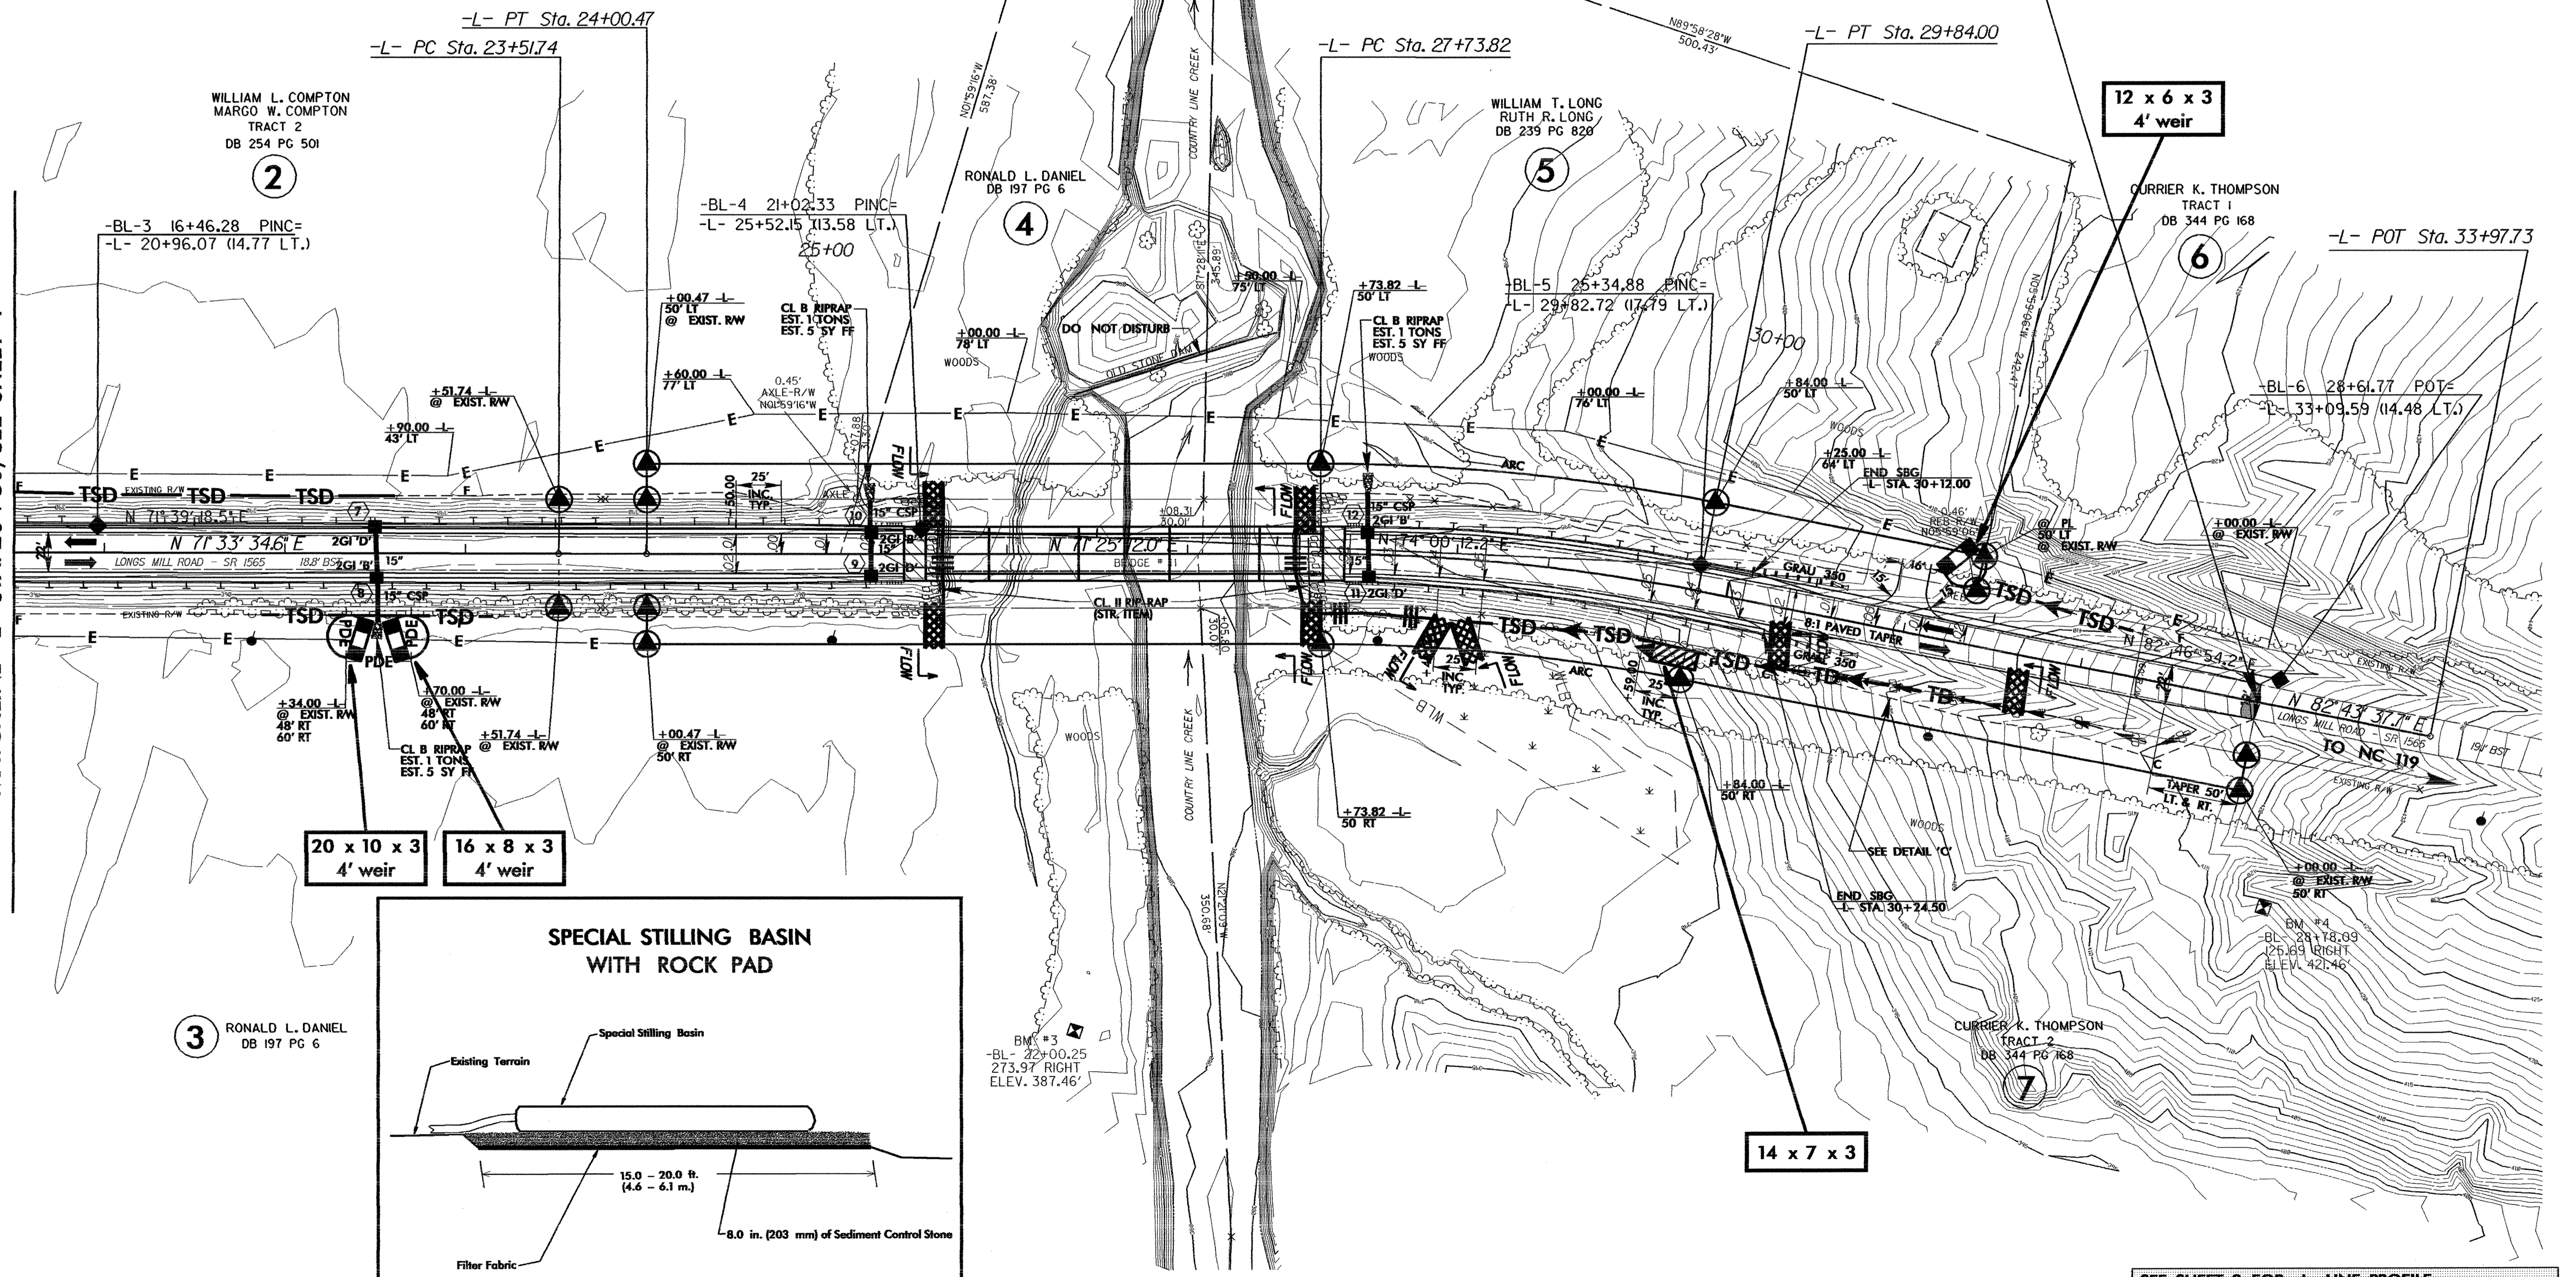

SEE SHEET 8 FOR -L- LINE PROFILE  
 SEE SHEETS S-1 THRU S-5 FOR STRUCTURE PLANS