
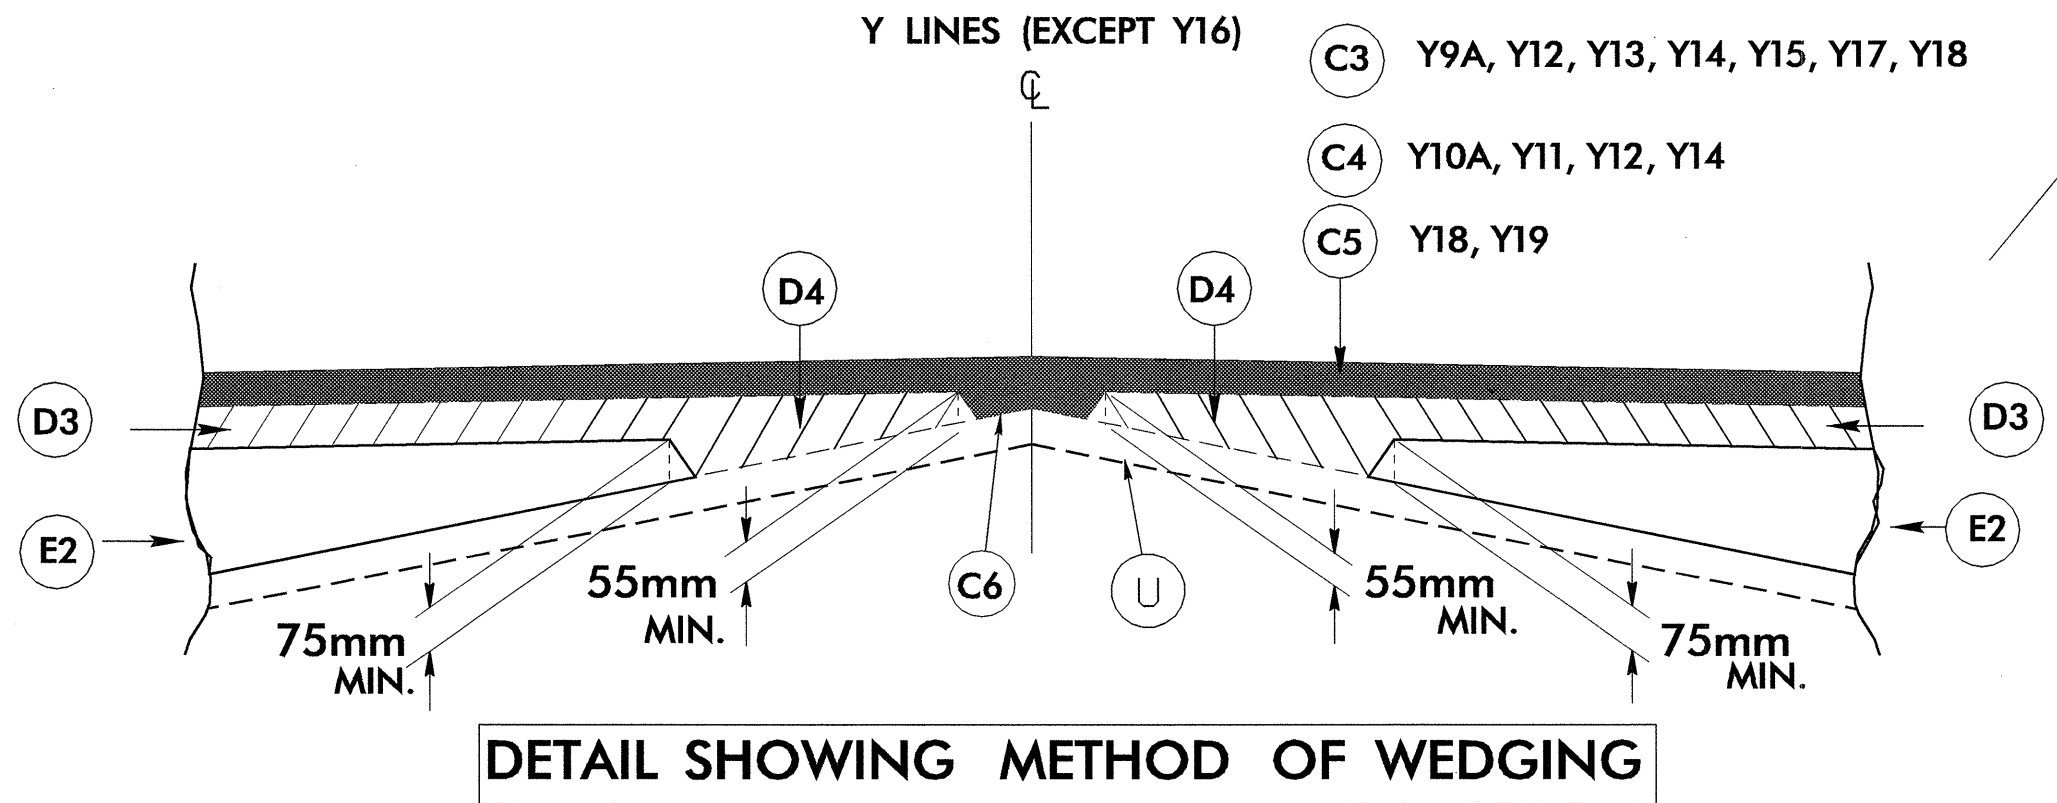


# PAVEMENT SCHEDULE FINAL DESIGN






PROJECT REFERENCE NO. <i>R-2610B</i>	SHEET NO. <i>2</i>
ROADWAY DESIGN ENGINEER <i>06-23-04</i>	PAVEMENT DESIGN ENGINEER
 <i>Richard A. Shilling</i>	

<b>C1</b>	PROP. APPROX. 60 mm ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 70.5 kg PER SQ. METER IN EACH OF TWO LAYERS.	<b>U</b>	EXISTING PAVEMENT.
<b>C2</b>	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 2.35 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 40 mm IN DEPTH.	<b>W</b>	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE STANDARD WEDGING DETAIL - SHEET No. 2 )
<b>C3</b>	PROP. APPROX. 60 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 72 kg PER SQ. METER IN EACH OF TWO LAYERS.	NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE	
<b>C4</b>	PROP. APPROX. 35 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 84 kg PER SQ. METER.		
<b>C5</b>	PROP. APPROX. 70 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 84 kg PER SQ. METER IN EACH OF TWO LAYERS.		
<b>C6</b>	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 40 mm IN DEPTH.		
<b>D1</b>	PROP. APPROX. 60 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 147kg PER SQ. METER		
<b>D2</b>	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH.		
<b>D3</b>	PROP. APPROX. 80 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 196 kg PER SQ. METER		
<b>D4</b>	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 55 mm OR GREATER THAN 110 mm IN DEPTH.		
<b>E1</b>	PROP. APPROX. 90 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 220.5 kg PER SQ. METER.		
<b>E2</b>	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.		
<b>E3</b>	PROP. APPROX. 270 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 330.75 KG PER SQ. METER IN EACH OF TWO LAYERS		
<b>J1</b>	PROP. 150 mm AGGREGATE BASE COURSE.		
<b>J2</b>	PROP. 200 mm AGGREGATE BASE COURSE.		
<b>K</b>	SUBGRADE TO BE TREATED WITH LIME TO A DEPTH OF 200 mm AT A RATE OF 11 kg PER SQ. METER AS DIRECTED BY THE ENGINEER. OR SUBGRADE TO BE TREATED WITH CEMENT AT A RATE OF 30 kg PER SQ. METER TO A DEPTH OF 180 mm AS DIRECTED BY THE ENGINEER. OR SUBGRADE TO BE TREATED WITH AGGREGATE AT A RATE OF 135 kg PER SQ. METER AND CEMENT AT A RATE OF 30 kg PER SQ. METER TO A DEPTH OF 180 mm AS DIRECTED BY THE ENGINEER.		
<b>R1</b>	SHOULDER BERM GUTTER		
<b>T</b>	EARTH MATERIAL.		



THESE ARE THE RESPECTIVE SURFACE COURSE LAYERS AS INDICATED BY THE ADJACENT -L- PAVEMENT DESIGNS FOR EITHER THE NBL OR SBL

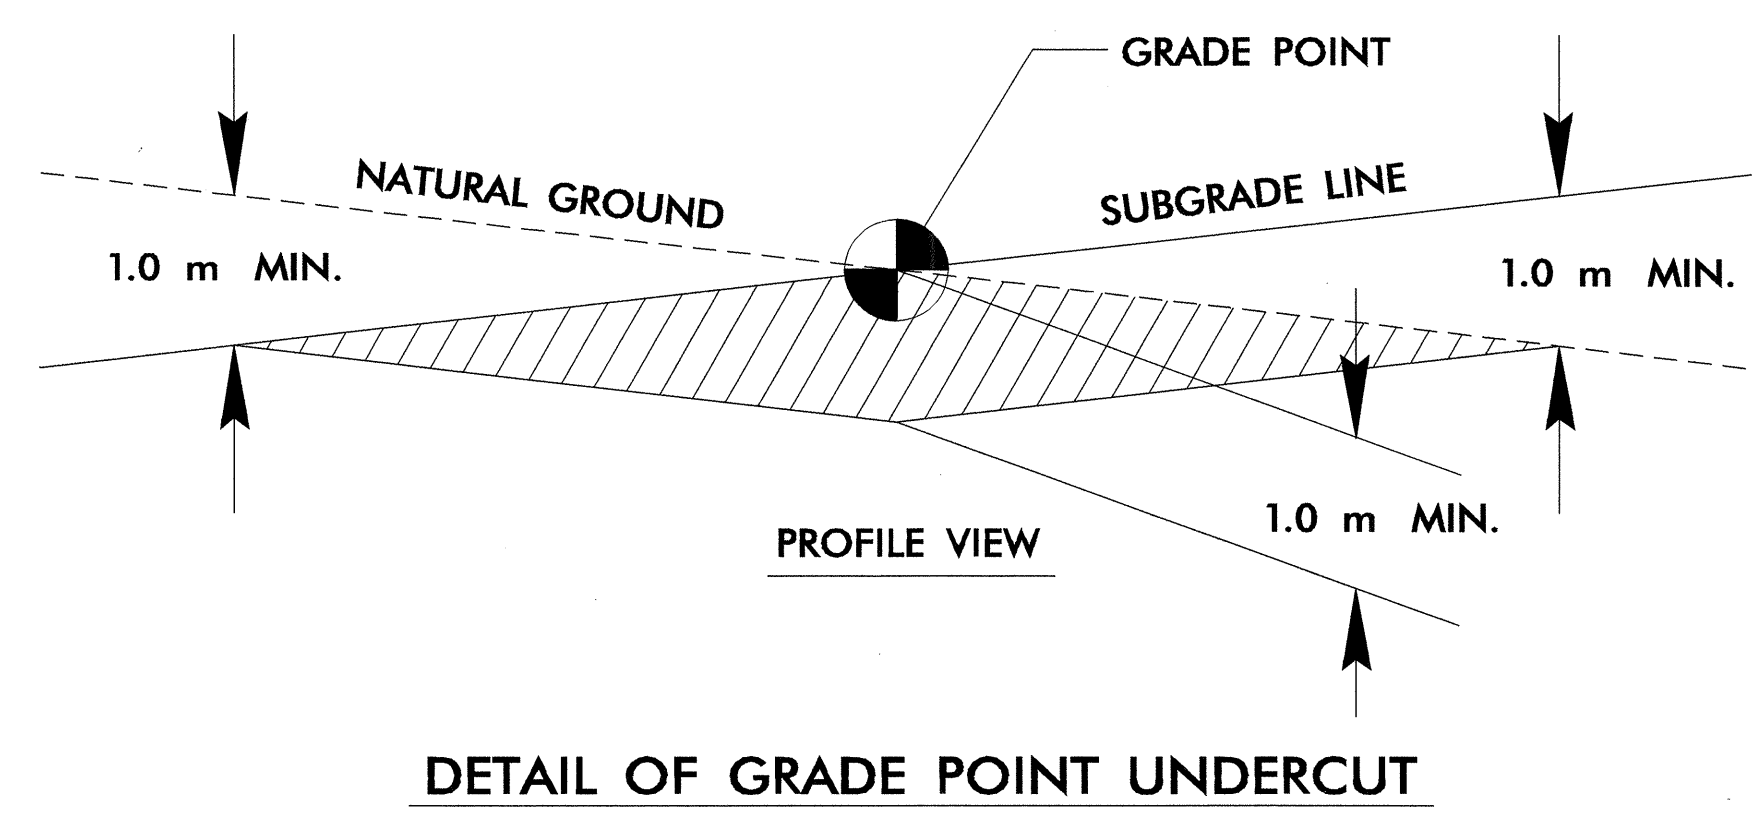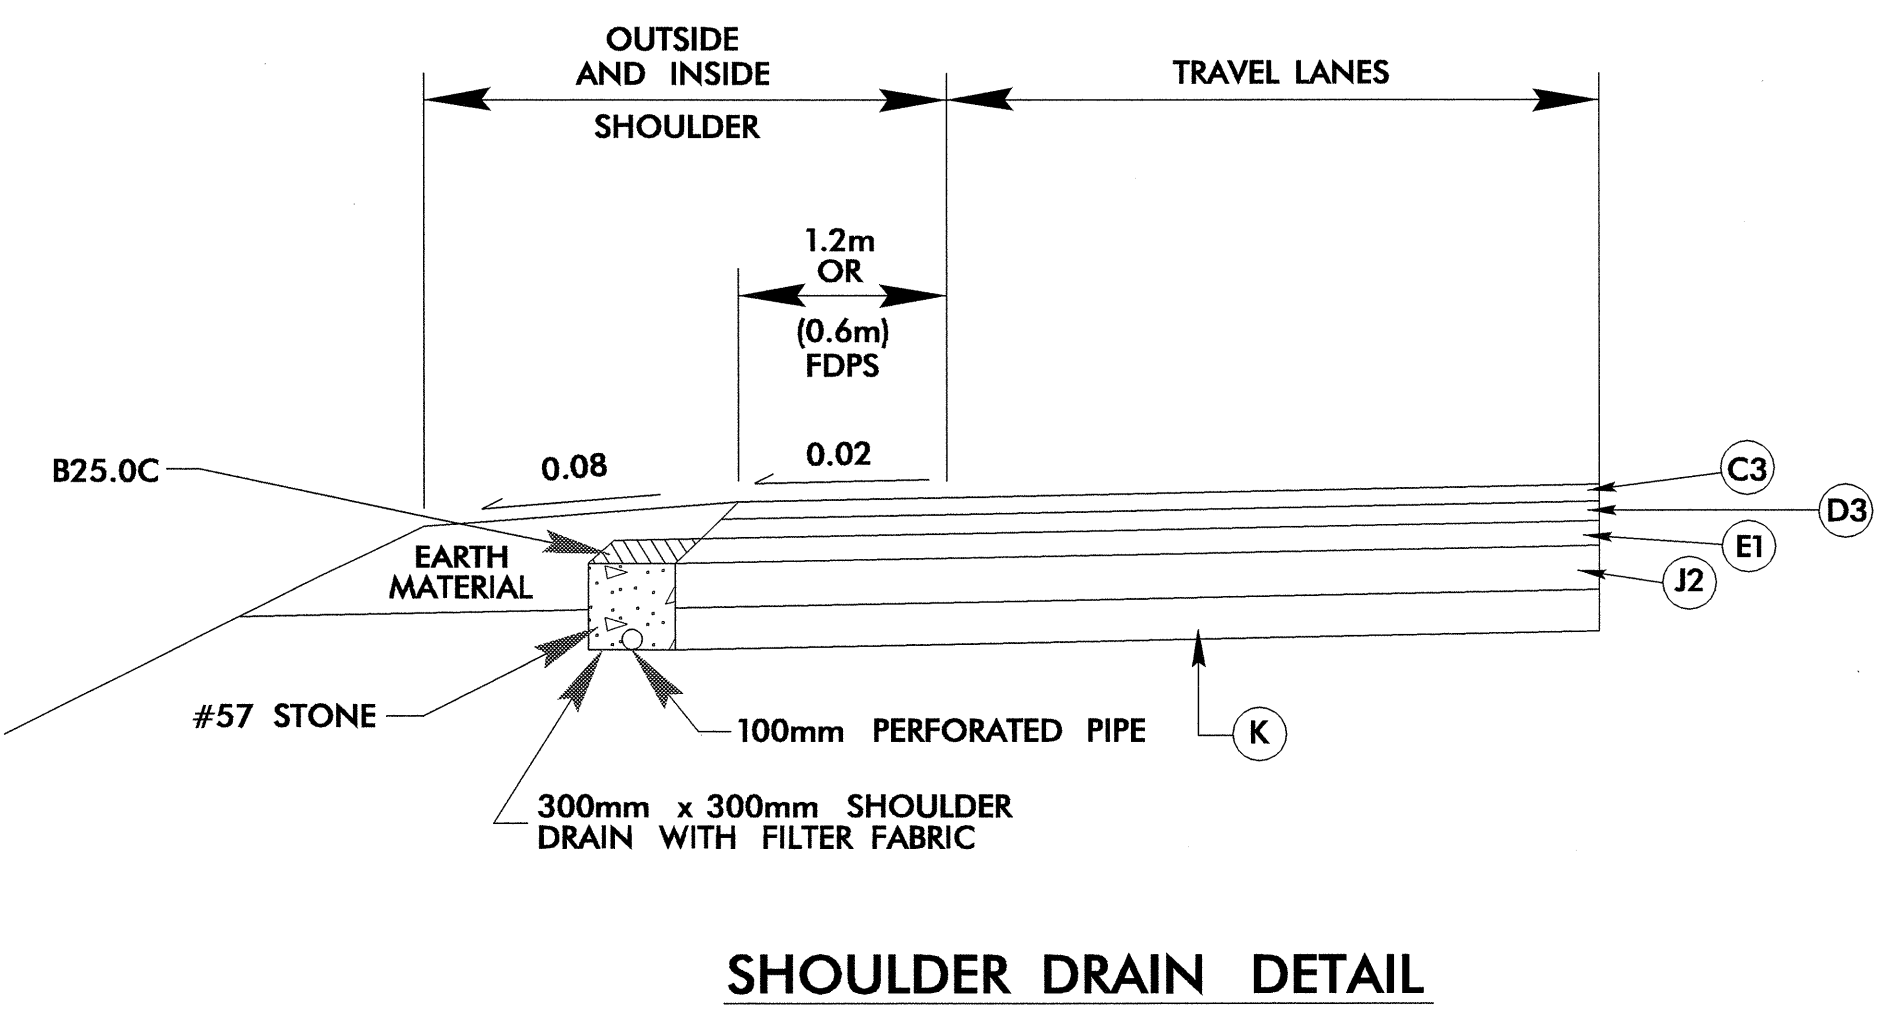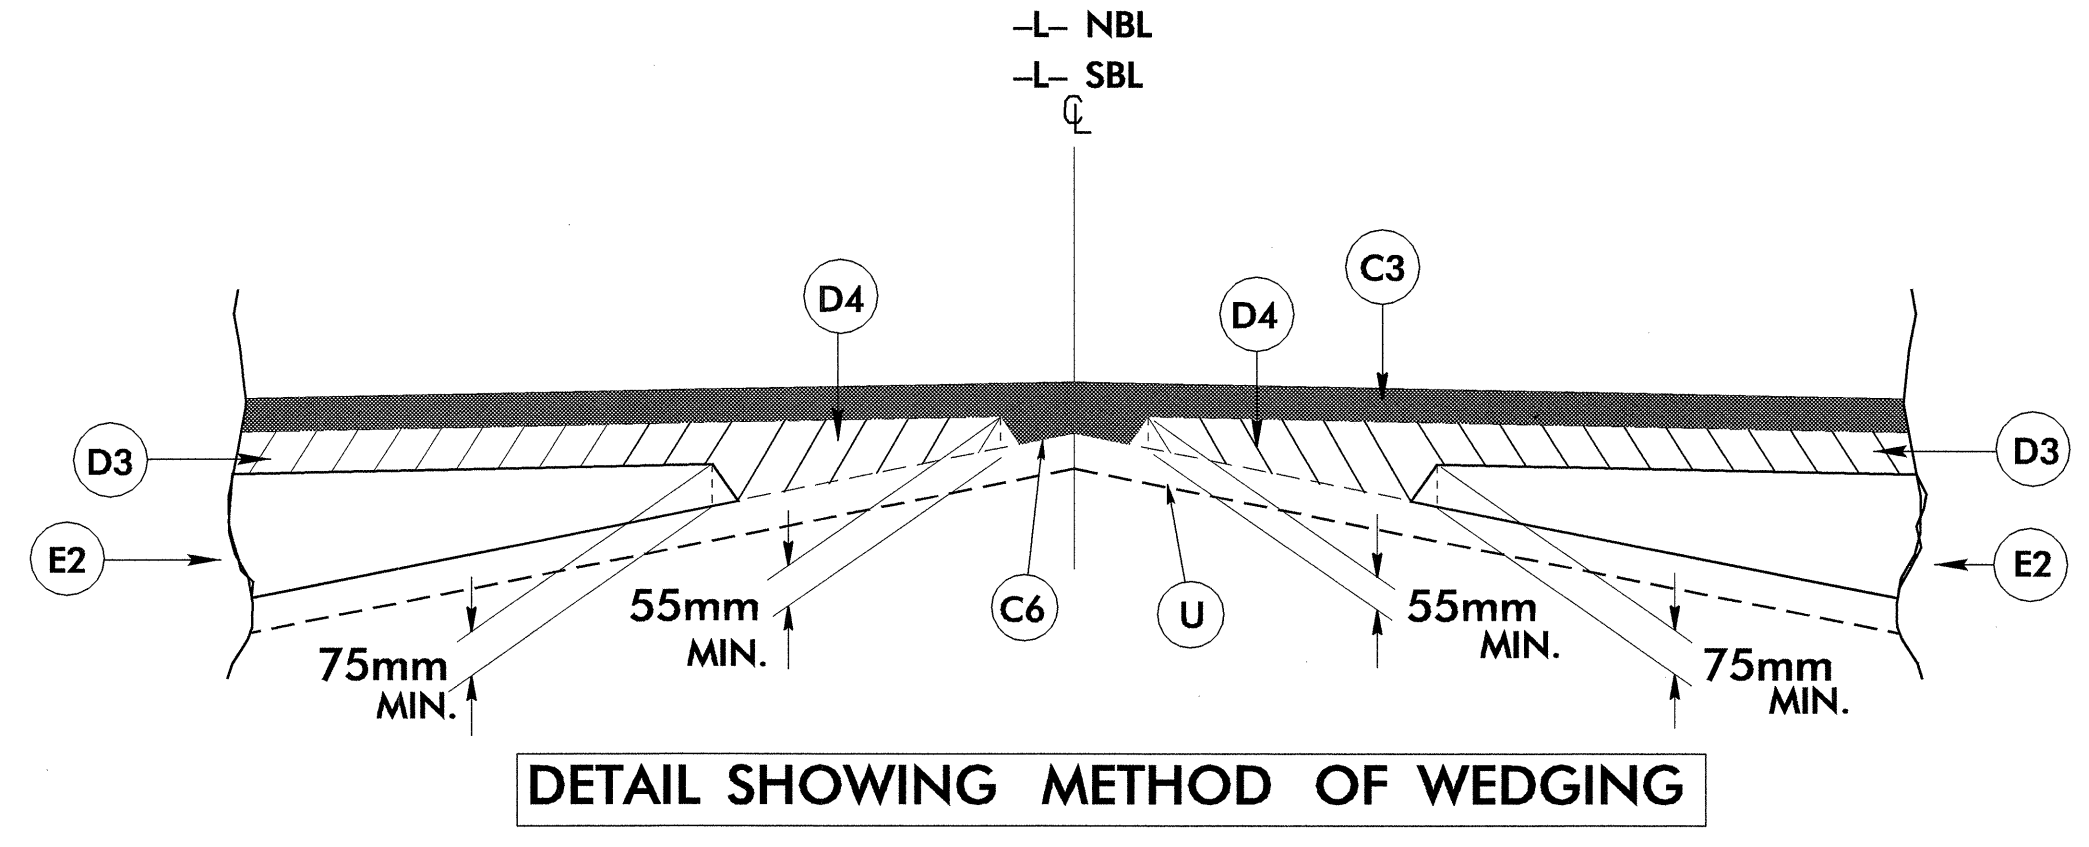

10/26/08  
 23-JUN-2004 14:34  
 RShilling