


PROJECT REFERENCE NO.		SHEET NO.	
U-0620		EC-9/CONST.10	
RW SHEET NO.			
ROADWAY DESIGN ENGINEER		HYDRAULICS ENGINEER	

SEE SHEET 28 FOR -L- PROFILE  
 SEE SHEET 35 FOR -Y10- PROFILE  
 SEE SHEET 36 FOR -Y11- PROFILE

-L-		-Y11-	
Pls Sta 93+06.55	PI Sta 101+99.17	Pls Sta 110+09.13	PI Sta 12+55.38
Os = 2'13' 39.0"	Δ = 43' 51' 02.9" (LT)	Os = 2'13' 39.0"	Δ = 28' 45' 00.0" (RT)
LS = 162.00'	D = 2' 45' 00.0"	LS = 162.00'	D = 5' 45' 00.0"
LT = 108.01'	L = 1,594.57'	LT = 108.01'	L = 500.00'
ST = 54.01'	T = 838.63'	ST = 54.01'	T = 255.38'
	R = 2,083.48'		R = 996.45'
	SE = 0.045		SE = EXIST
	INC = 36		

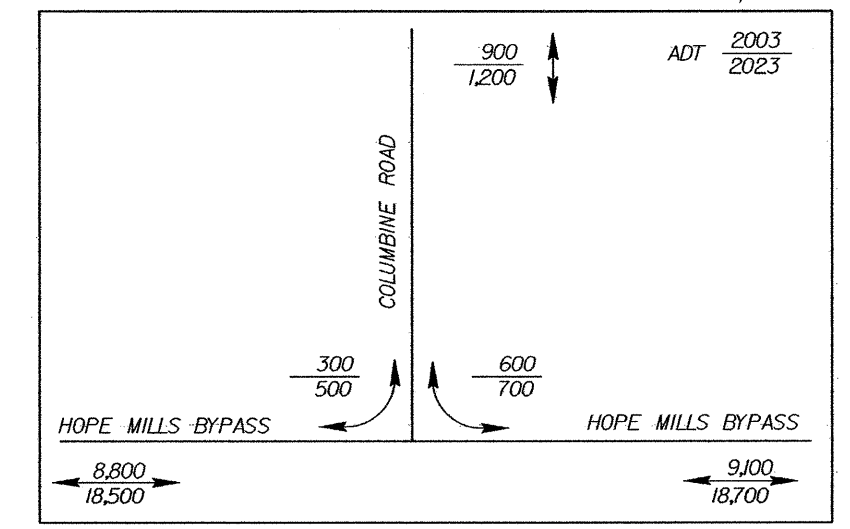

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 10

ALL DRIVEWAYS ARE 20' WIDE UNLESS OTHERWISE NOTED  
 BREAK UP AND REMOVE EXISTING PAVEMENT UNDERNEATH PROPOSED RAISED MEDIAN.

