

PROJECT REFERENCE NO.	SHEET NO.
U-0620	EC-4/CONST.5
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER








NOTE: UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AND/OR TEMPORARY ROCK SILT CHECK TYPE A AS STILLING BASIN WHERE APPLICABLE.

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 5

ALL DRIVEWAYS ARE 20' WIDE UNLESS OTHERWISE NOTED  
BREAK UP AND REMOVE EXISTING PAVEMENT UNDERNEATH PROPOSED RAISED MEDIAN.

-L-	-Y2-	-DET2-
PIs Sta 24+15.30 Os = 1°29'59.8" Ds = 1°52'30.2" Ls = 150.00' T = 77.80' ST = 72.24'	PI Sta 29+53.55 Δ = 18°15'47.5" (LT) D = 2°00'00.0" L = 913.16' T = 460.49' R = 2,864.79' SE = 0.035 INC = 50	PIs Sta 34+64.56 Os = 1°45'00.0" Ls = 175.00' T = 116.67' ST = 58.34'
	PI Sta 14+39.83 Δ = 15°38'28.9" (RT) D = 6°45'00.0" L = 231.72' T = 116.59' R = 848.83' SE = 05 INC = 36	PI Sta 10+67.15 Δ = 38°44'44.0" (LT) D = 30°00'00.0" L = 129.15' T = 67.15' R = 190.99' SE = SEE PLANS

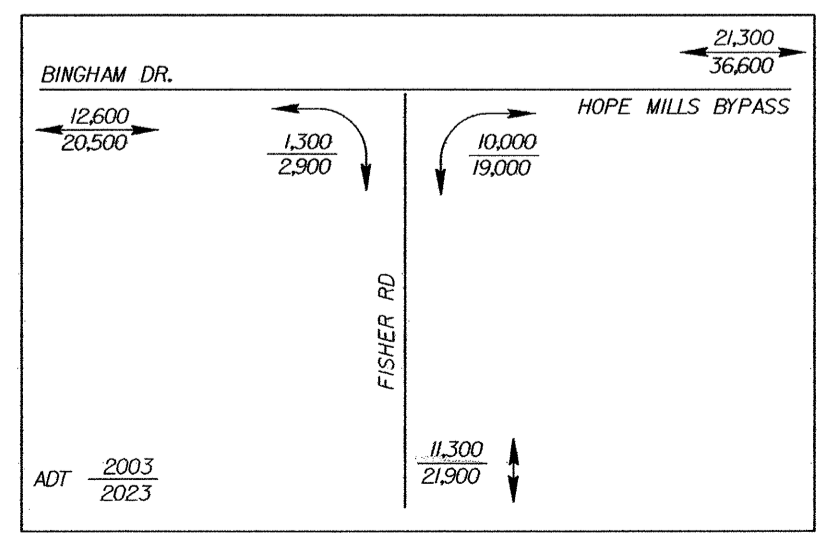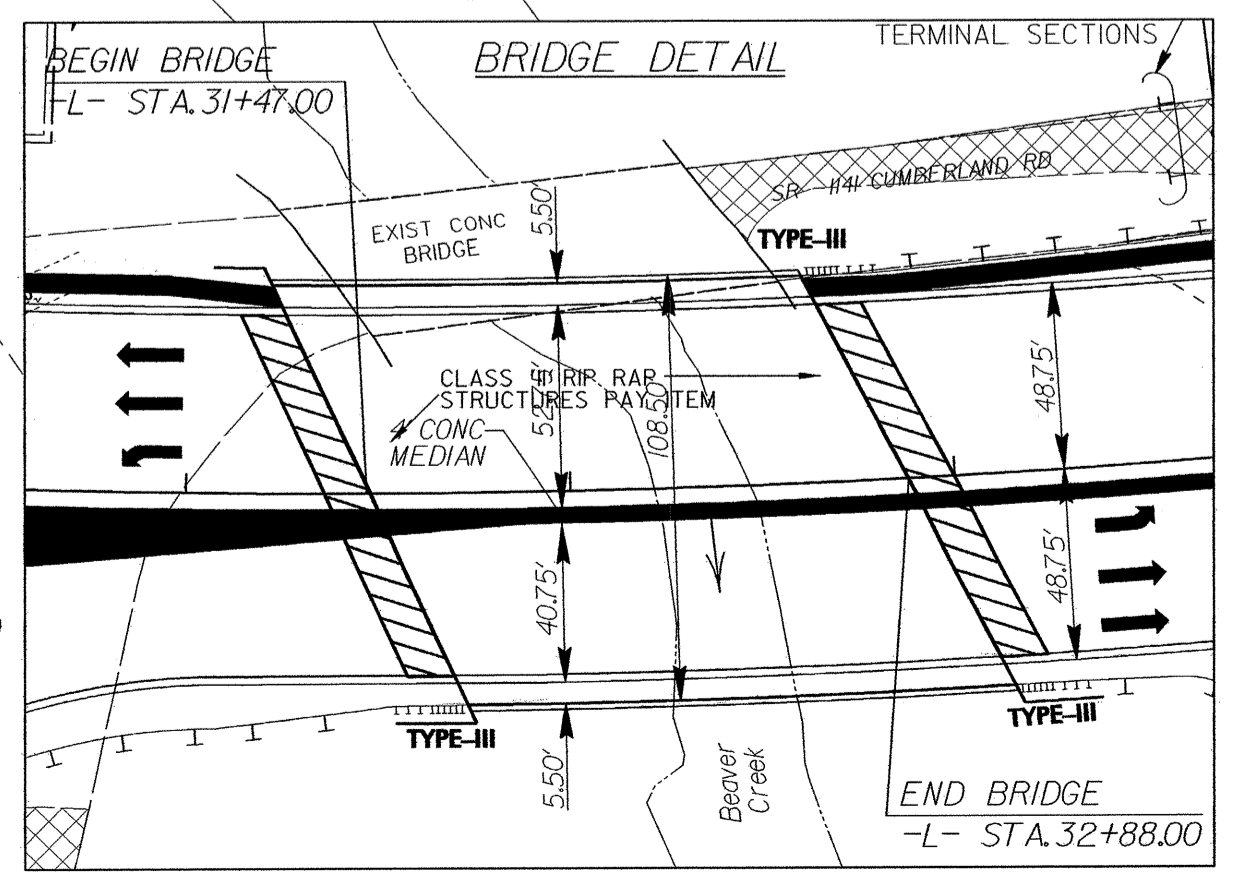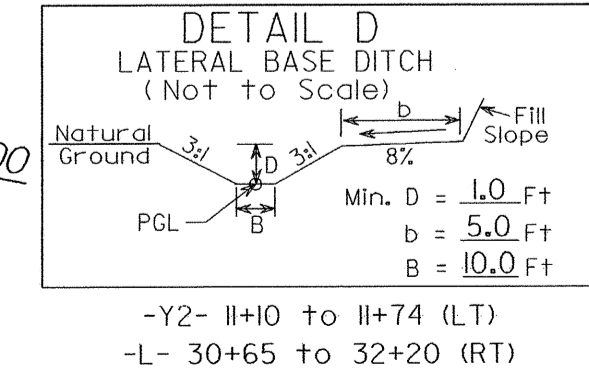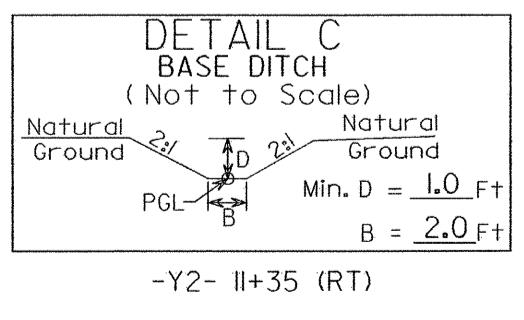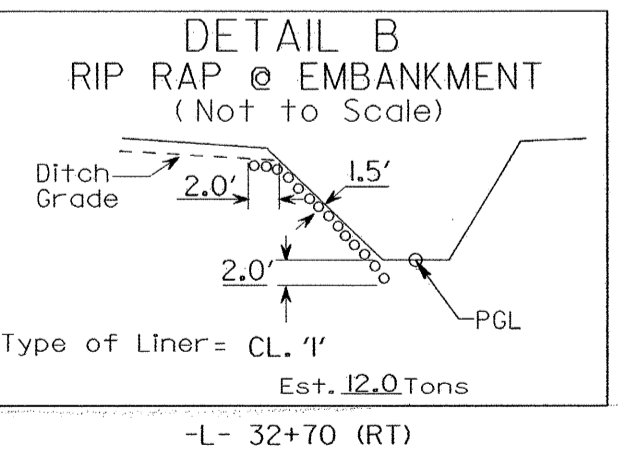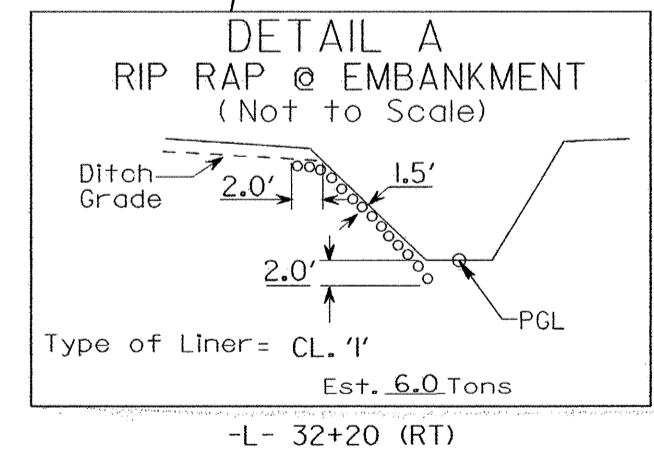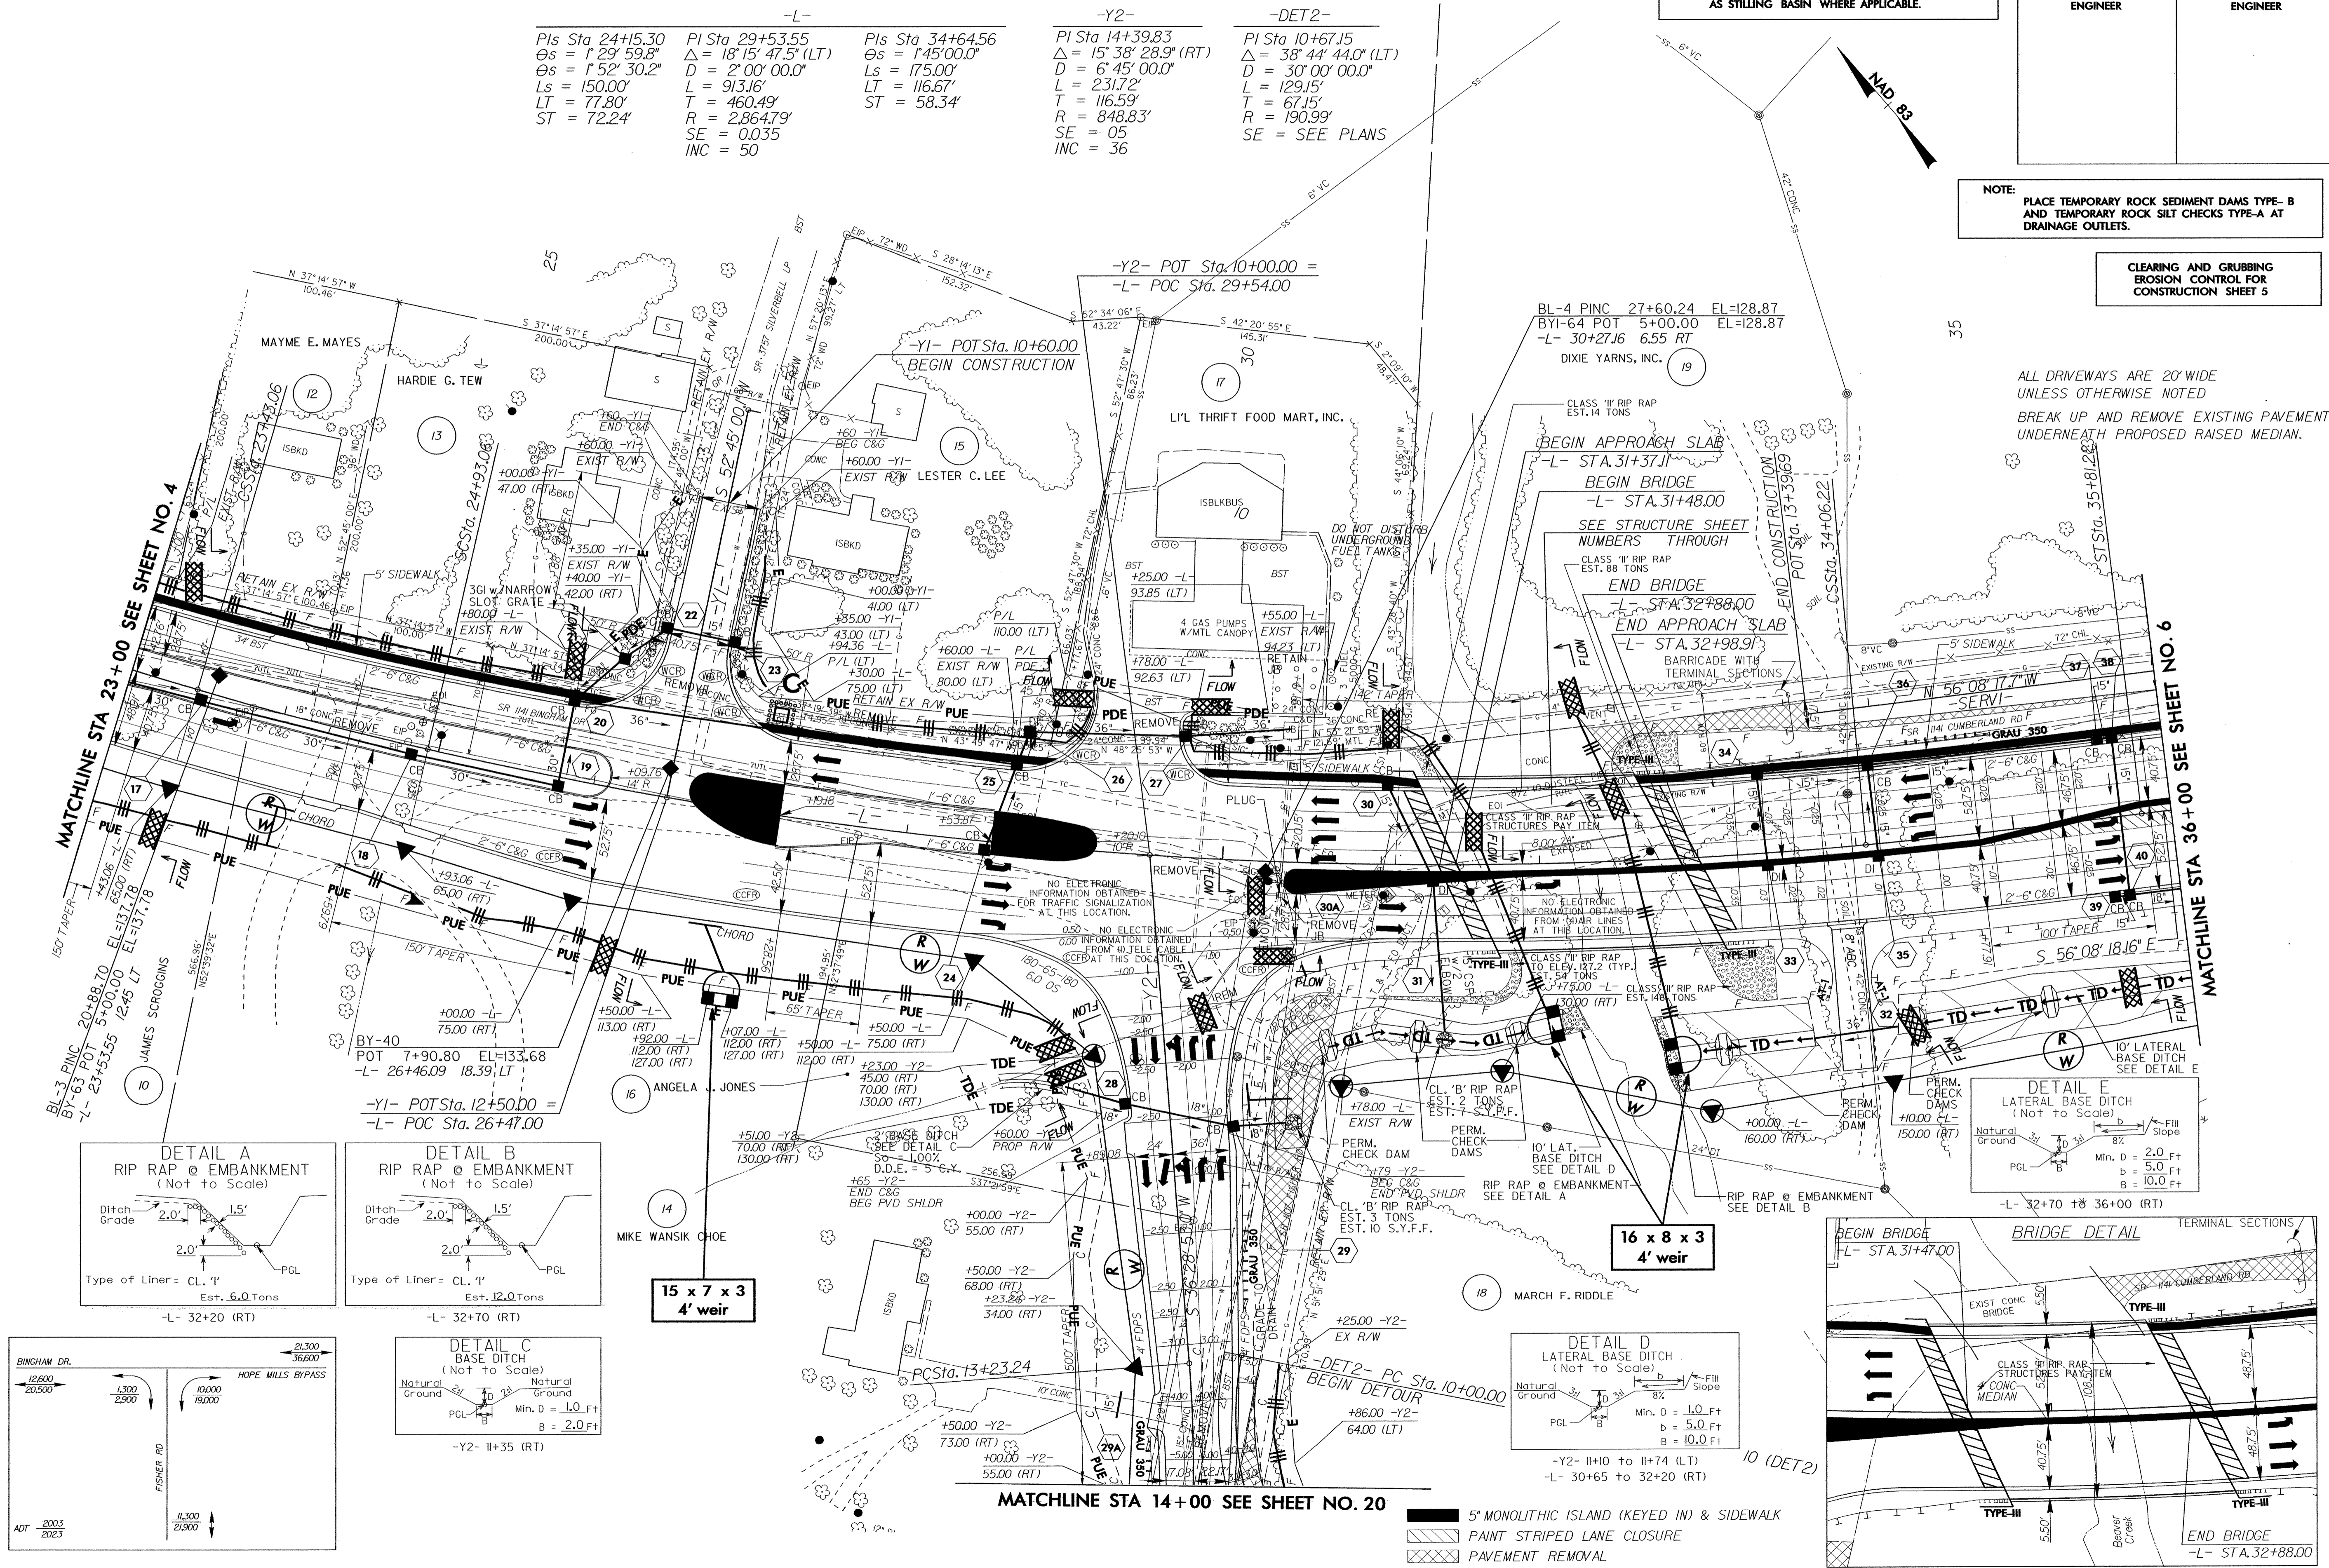

MATCHLINE STA 14+00 SEE SHEET NO. 20

- 5' MONOLITHIC ISLAND (KEYED IN) & SIDEWALK
- PAINT STRIPED LANE CLOSURE
- PAVEMENT REMOVAL