


18 CHANNEL CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumper and set switches as shown)

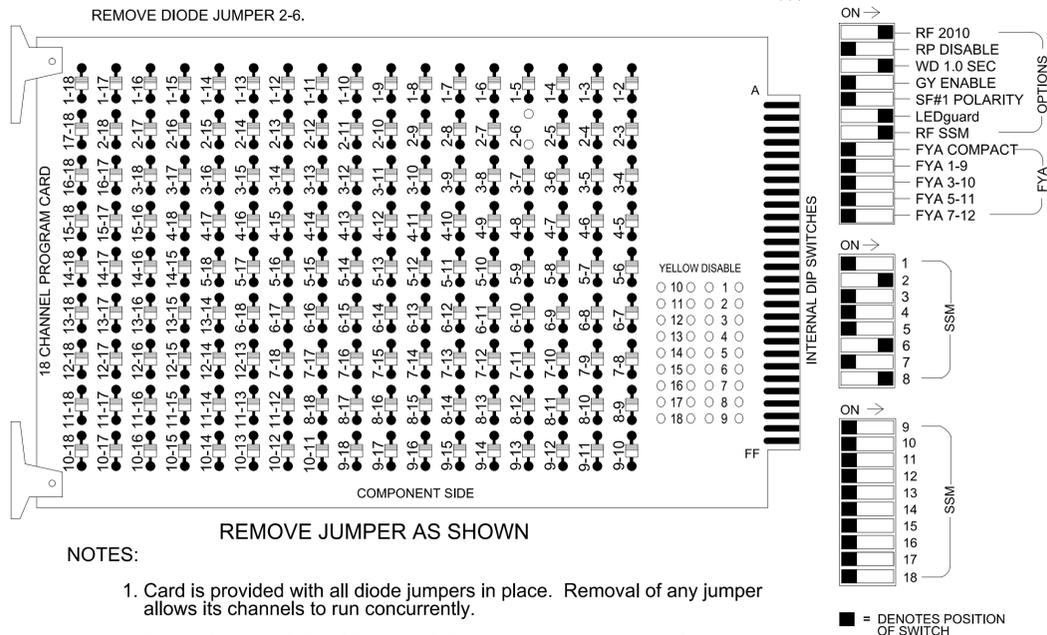

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that the Red Enable is active at all times during normal operation.
4. Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
2. Program controller to start up in phase 2 Green No Walk and 6 Green No Walk.
3. If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
4. The cabinet and controller are part of the SR 1700 (Covered Bridge Road) System.

EQUIPMENT INFORMATION

Controller.....2070LX
 Cabinet.....332 w/ Aux
 Software.....Q-Free MAXTIME
 Cabinet Mount.....Base
 Output File Positions.....18 With Aux. Output File
 Load Switches Used.....S2, S8, S11
 Phases Used.....2, 6, 8
 Overlap "1".....NOT USED
 Overlap "2".....NOT USED
 Overlap "3".....NOT USED
 Overlap "4".....NOT USED

SIGNAL HEAD HOOK-UP CHART

| LOAD SWITCH NO. | S1 | S2 | S3 | S4 | S5 | S6 | S7 | S8 | S9 | S10 | S11 | S12 | AUX S1 | AUX S2 | AUX S3 | AUX S4 | AUX S5 | AUX S6 |
|-----------------------|----|-------|-------|----|----|-------|----|-------|-------|-----|-------|-------|--------|--------|--------|--------|--------|--------|
| CMU CHANNEL NO. | 1 | 2 | 13 | 3 | 4 | 14 | 5 | 6 | 15 | 7 | 8 | 16 | 9 | 10 | 17 | 11 | 12 | 18 |
| PHASE | 1 | 2 | 2 PED | 3 | 4 | 4 PED | 5 | 6 | 6 PED | 7 | 8 | 8 PED | OL1 | OL2 | SPARE | OL3 | OL4 | SPARE |
| SIGNAL HEAD NO. | NU | 21,22 | NU | NU | NU | NU | NU | 61,62 | NU | NU | 81,82 | NU | NU | NU | NU | NU | NU | NU |
| RED | | 128 | | | | | | 134 | | | 107 | | | | | | | |
| YELLOW | | 129 | | | | | | 135 | | | | | | | | | | |
| GREEN | | 130 | | | | | | 136 | | | | | | | | | | |
| RED ARROW | | | | | | | | | | | | | | | | | | |
| YELLOW ARROW | | | | | | | | | | | 108 | | | | | | | |
| FLASHING YELLOW ARROW | | | | | | | | | | | | | | | | | | |
| GREEN ARROW | | | | | | | | | | | 109 | | | | | | | |

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

| FILE | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|
| U | S | S | S | S | S | S | S | S | S | S | S | S | S | FS |
| L | T | T | T | T | T | T | T | T | T | T | T | T | T | ST |
| U | S | S | S | S | S | S | S | S | S | S | S | S | S | FS |
| L | T | T | T | T | T | T | T | T | T | T | T | T | T | ST |

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

SPECIAL DETECTOR NOTE

Install a multizone microwave detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer -approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

OUTPUT CHANNEL CONFIGURATION

Front Panel

Main Menu >Controller >More>Channels>Channels Config

Web Interface

Home >Controller >Advanced IO>Channels>Channels Configuration

Channel Configuration

| Channel | Control Type | Control Source | Flash Yellow | Flash Red | Flash Alt | MMU Channel |
|---------|---------------|----------------|--------------|-----------|-----------|-------------|
| 1 | Phase Vehicle | 1 | | X | X | 1 |
| 2 | Phase Vehicle | 2 | | X | | 2 |
| 3 | Phase Vehicle | 3 | | X | X | 3 |
| 4 | Phase Vehicle | 4 | | X | | 4 |
| 5 | Phase Vehicle | 5 | | X | | 5 |
| 6 | Phase Vehicle | 6 | | X | X | 6 |
| 7 | Phase Vehicle | 7 | | X | | 7 |
| 8 | Phase Vehicle | 8 | | X | X | 8 |
| 9 | Overlap | 1 | | X | X | 9 |
| 10 | Overlap | 2 | | X | X | 10 |
| 11 | Overlap | 3 | | X | | 11 |
| 12 | Overlap | 4 | | X | | 12 |
| 13 | Phase Ped | 2 | | | | 13 |
| 14 | Phase Ped | 4 | | | | 14 |
| 15 | Phase Ped | 6 | | | | 15 |
| 16 | Phase Ped | 8 | | | | 16 |
| 17 | Overlap | 5 | | X | X | 17 |
| 18 | Overlap | 6 | | X | | 18 |

MAXTIME STARTUP AND SOFTWARE FLASH PROGRAMMING DETAIL

Front Panel

Main Menu >Controller >Unit

Web Interface

Home >Controller >Unit

Modify parameters as shown below and save changes.

Start Up Parameters

| |
|------------------------|
| StartUp Clearance Hold |
| 6 |

Unit Flash Parameters

| |
|-------------------------|
| All Red Flash Exit Time |
| 6 |

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 04-1470T1
 DESIGNED: February 2025
 SEALED: 02/04/25
 REVISED: N/A



Electrical Detail - Temporary Design 1

ELECTRICAL AND PROGRAMMING DETAILS FOR:

SR 1700 (Covered Bridge Road) at SR 1705 (Castleberry Road)

Divison 4 Johnston County Archer Lodge

PLAN DATE: February 2025 REVIEWED BY: M.L. Stygles


PREPARED BY: L. Gottlieb REVIEWED BY: J. Ma/J.L. Lewis

REVISIONS INIT. DATE



750 N. Greenfield Pkwy, Garner, NC 27529

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED



DocuSigned by: Matthew L. Stygles 2/4/2025

SIG. INVENTORY NO. 04-1470T1