

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

OVERLAP PROGRAMMING

Front Panel
Main Menu >Controller >Overlap >Overlap Parameters/Overlap Timings

Web Interface
Home >Controller >Overlap Configuration >Overlaps


Overlap Plan 1

Overlap	1	2	3	4
Type	FYA 4 - Section	FYA 4 - Section	FYA 4 - Section	FYA 4 - Section
Included Phases	2	4	6	8
Modifier Phases	1	3	5	7
Trail Green	0	0	0	0
Trail Yellow	0.0	0.0	0.0	0.0
Trail Red	0.0	0.0	0.0	0.0


THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 07-0883T5
DESIGNED: Apr 2023
SEALED: 04/05/2023
REVISED: N/A

Electrical Detail - Sheet 2 of 2
(Temporary Design 5 - TMP Phase 2, Step 7)

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

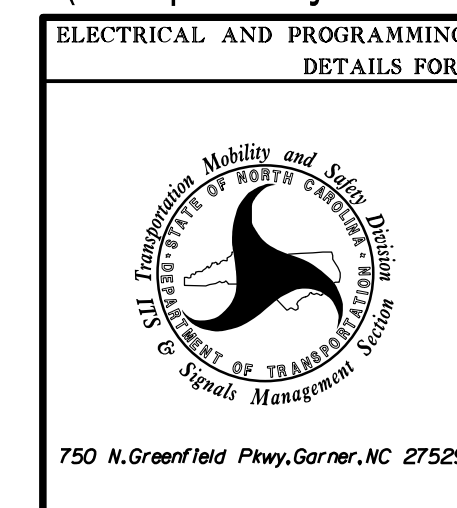

ELECTRICAL AND PROGRAMMING DETAILS FOR:		NC 68 at NC 150 (Oak Ridge Road)	
PLAN DATE:	April 2023	REVIEWED BY:	TS Popelka
PREPARED BY:	JA Wendt	RKA PROJ. NO.:	18062 (040)
REVISIONS	INIT.	DATE	

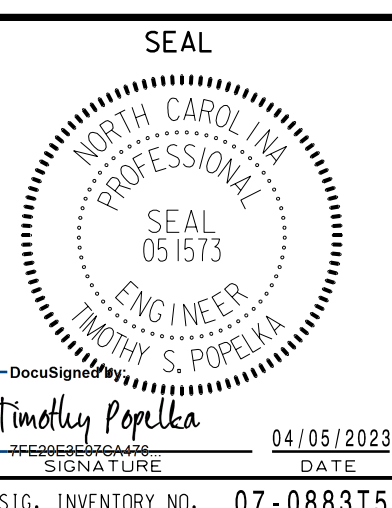

DocuSign
Timothy Popelka
SIGNATURE DATE: 04/05/2023
SIG. INVENTORY NO. 07-0883T5