


**FINAL PAVEMENT DESIGN SCHEDULE**

<b>C1</b>	PROP. APPROX. 2.5" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
<b>C2</b>	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT TO EXCEED 1 1/2" IN DEPTH.
<b>E1</b>	PROP. APPROX. 3.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
<b>J</b>	PROP. 8.0" AGGREGATE BASE COURSE.
<b>R</b>	SHOULDER BERM GUTTER.
<b>T</b>	EARTH MATERIAL.


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

PROJECT REFERENCE NO. B-3504	SHEET NO. 2
RW SHEET NO.	
ROADWAY DESIGN BRENDA L. MOORE ENGINEER SEAL 19795 5/25/04	PAVEMENT DESIGN CHI CHIE ENGINEER SEAL 13368 5/25/04

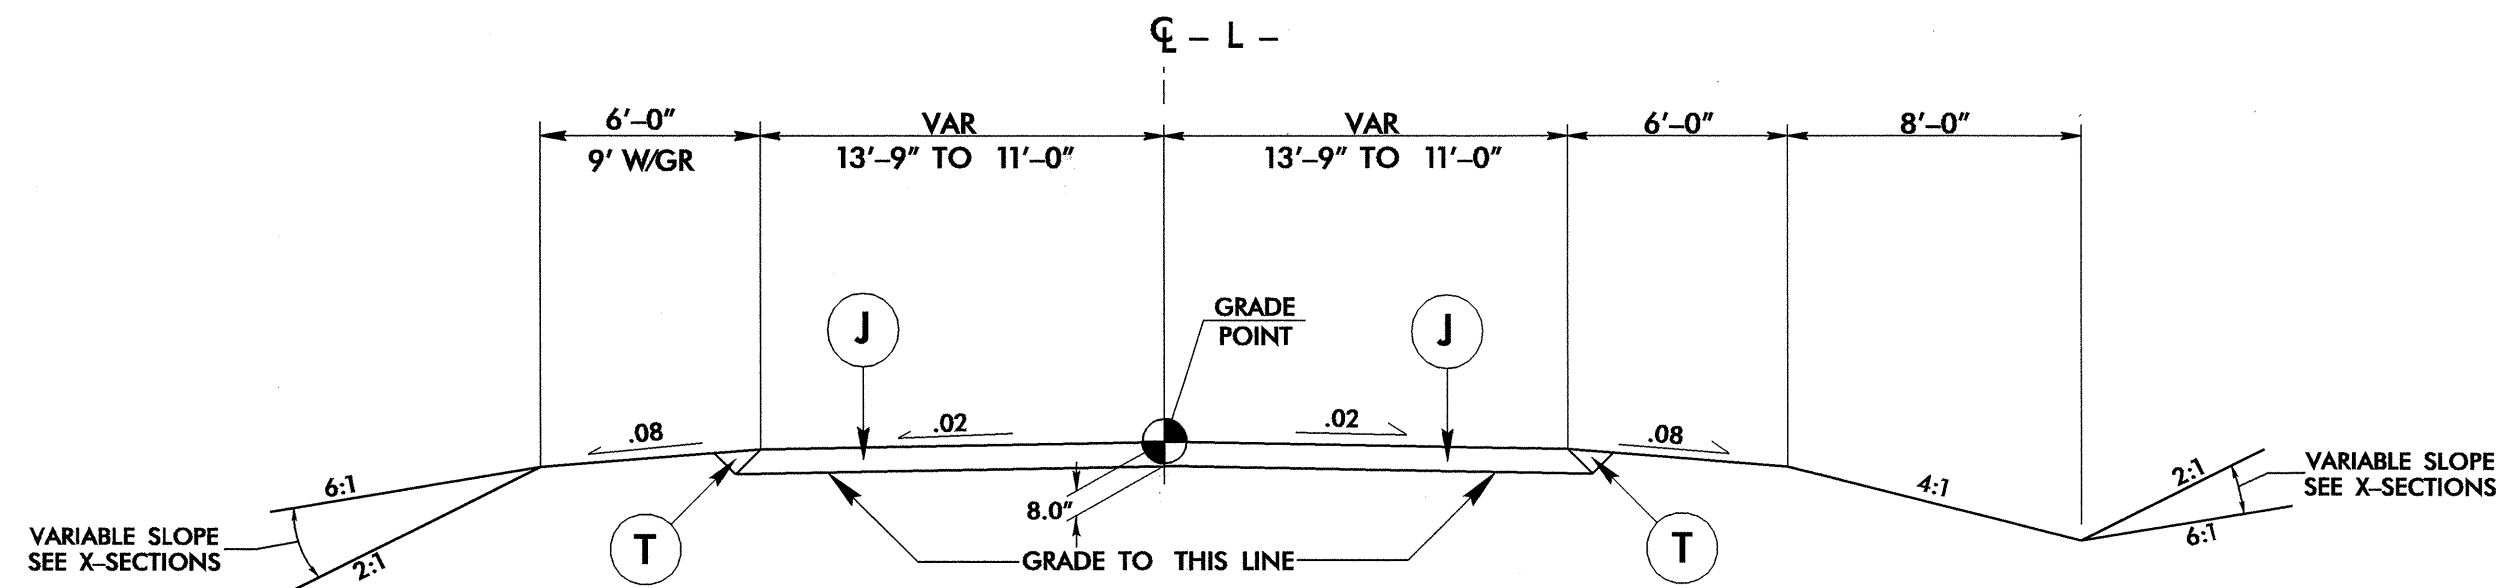


**TYPICAL SECTION NO. 1**

USE TYPICAL SECTION NO. 1  
-L- STA. 12+45.00 TO -L- STA. 15+70.00

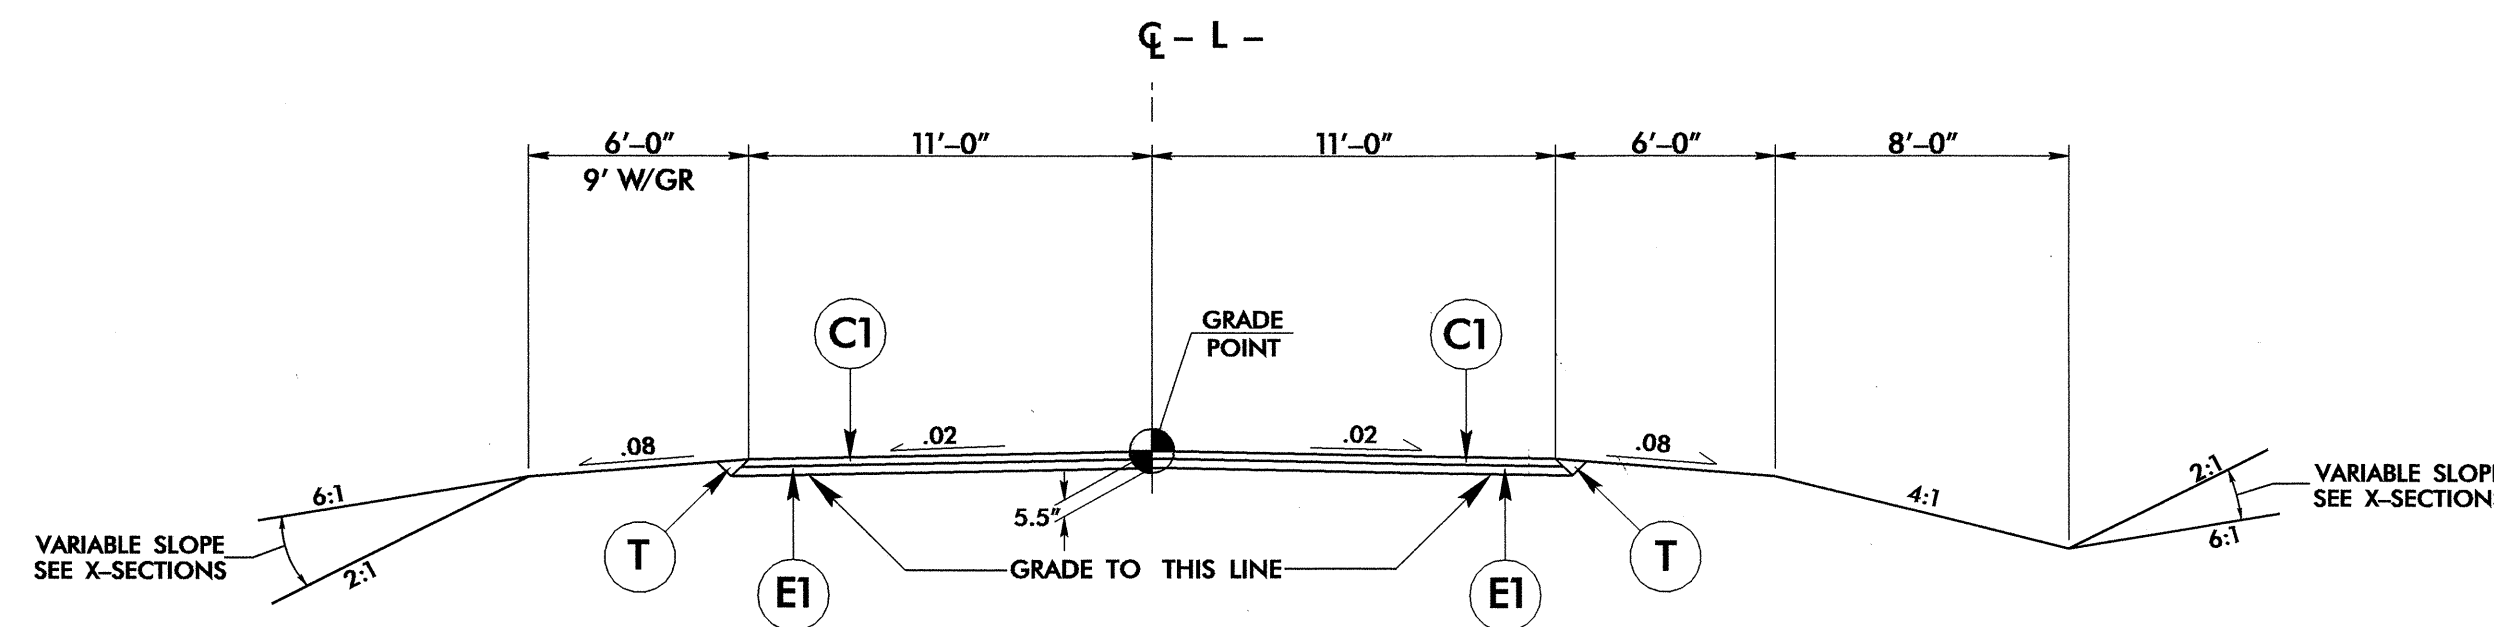

**TYPICAL SECTION NO. 2**


USE TYPICAL SECTION NO. 2  
-L- STA. 15+70.00 TO -L- STA. 18+18.00 (BEGIN BRIDGE)  
-L- STA. 19+23.00 (END BRIDGE) TO -L- STA. 23+04.81

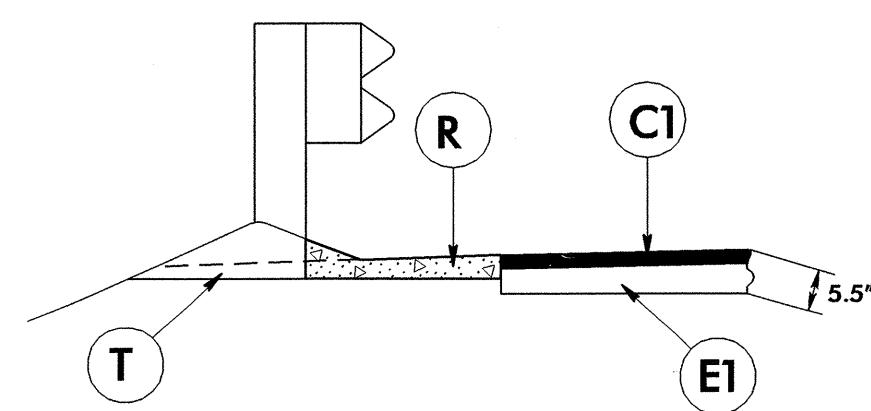

**SHOULDER BERM GUTTER DETAIL**

USE SHOULDER BERM GUTTER

-L- STA. 17+83.33 TO -L- STA. 17+90.08 (RT.)  
-L- STA. 19+52.52 TO -L- STA. 21+77.00 (LT.)

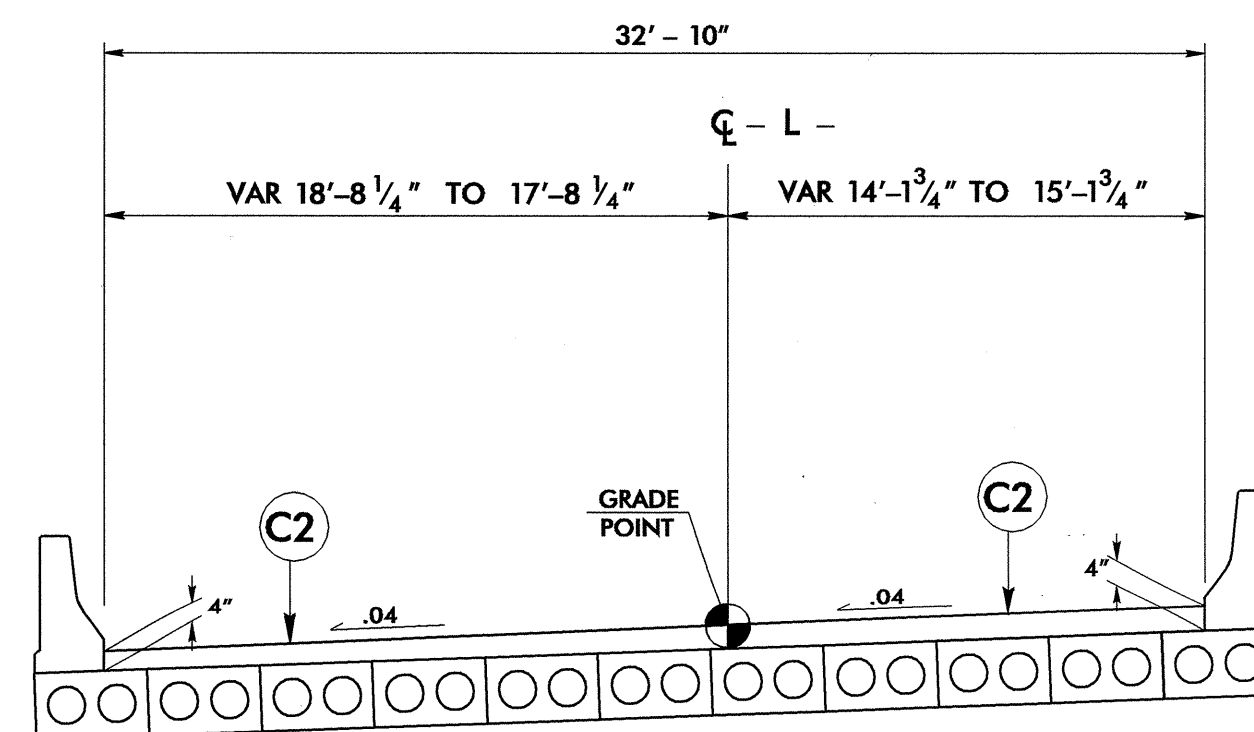

**TYPICAL SECTION NO. 3**

USE TYPICAL SECTION NO. 3  
-L- STA. 18+18.00 (BEGIN BRIDGE) TO -L- STA. 19+23.00 (END BRIDGE)