
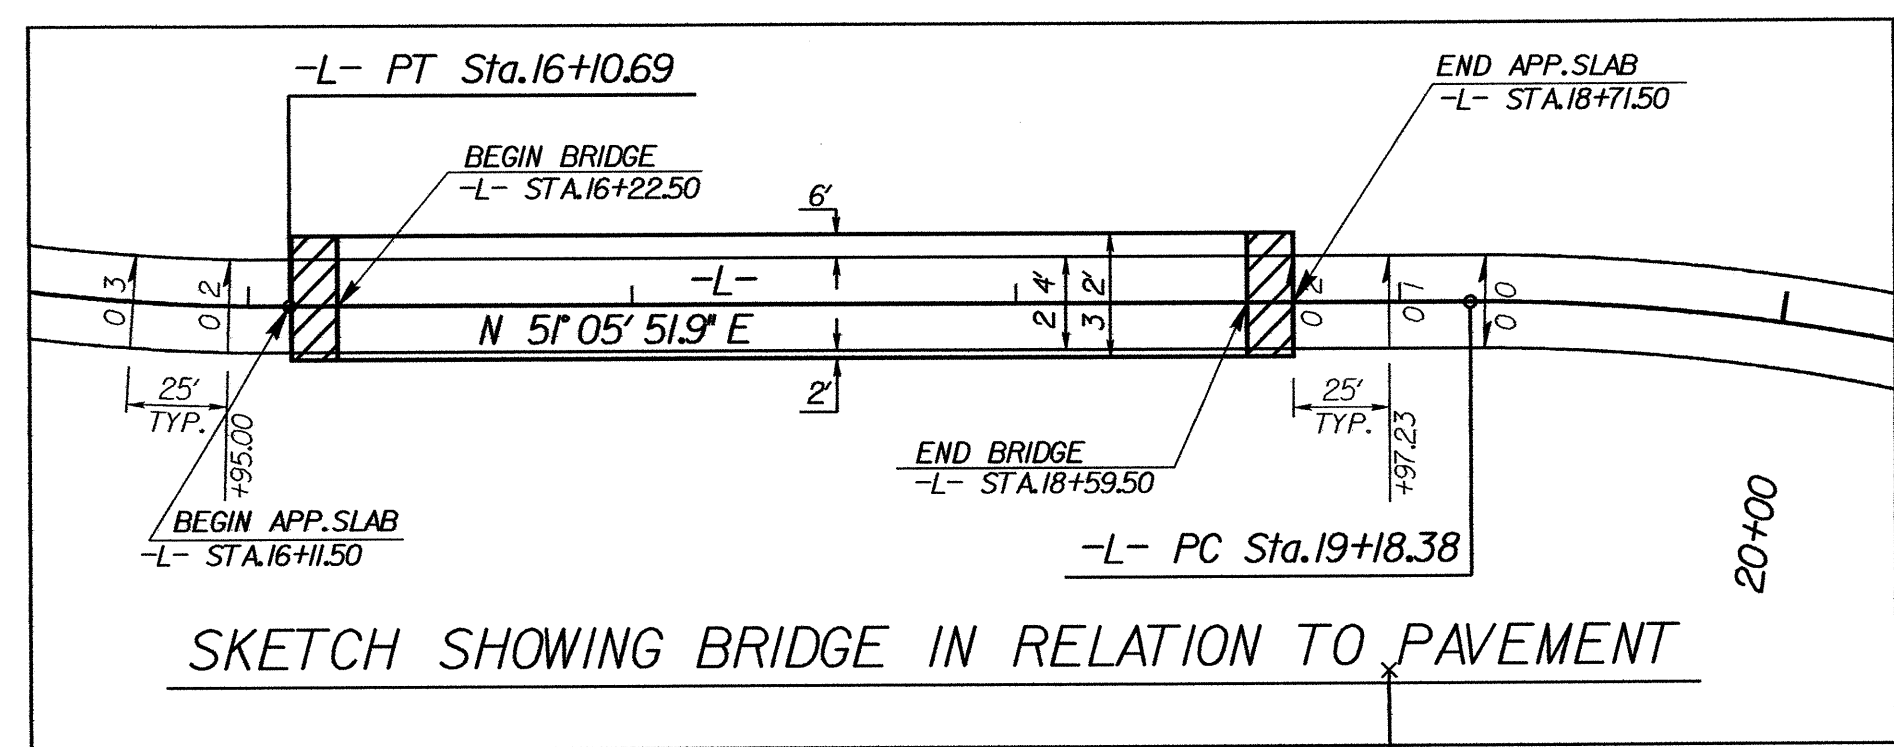


PROJECT REFERENCE NO.	SHEET NO.
B-3690	EC-3/CONST.4
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER



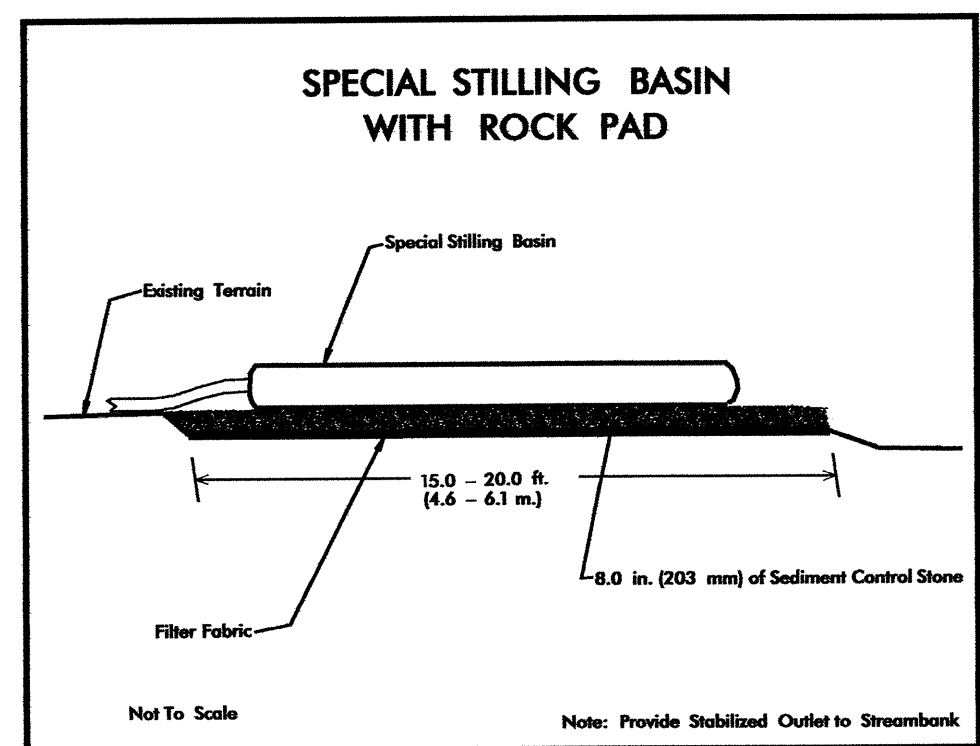


-L-  
 PI Sta 15+36.25      PI Sta 20+65.10  
 $\Delta = 14^\circ 58' 25.5\" (LT)$        $\Delta = 28^\circ 43' 35.4\" (RT)$   
 $D = 10' 00' 00.0\"$        $D = 10' 00' 00.0\"$   
 $L = 149.74'$        $L = 287.27'$   
 $T = 75.30'$        $T = 146.72'$   
 $R = 572.96'$        $R = 572.96'$   
 SE = SEE PLANS      SE = SEE PLANS

NOTE:  
 PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE-B AND TEMPORARY ROCK SILT CHECKS TYPE-A AT DRAINAGE OUTLETS.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 4

NOTE:  
 UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AND/OR SPECIAL STILLING BASINS AS STILLING BASINS WHERE APPLICABLE.

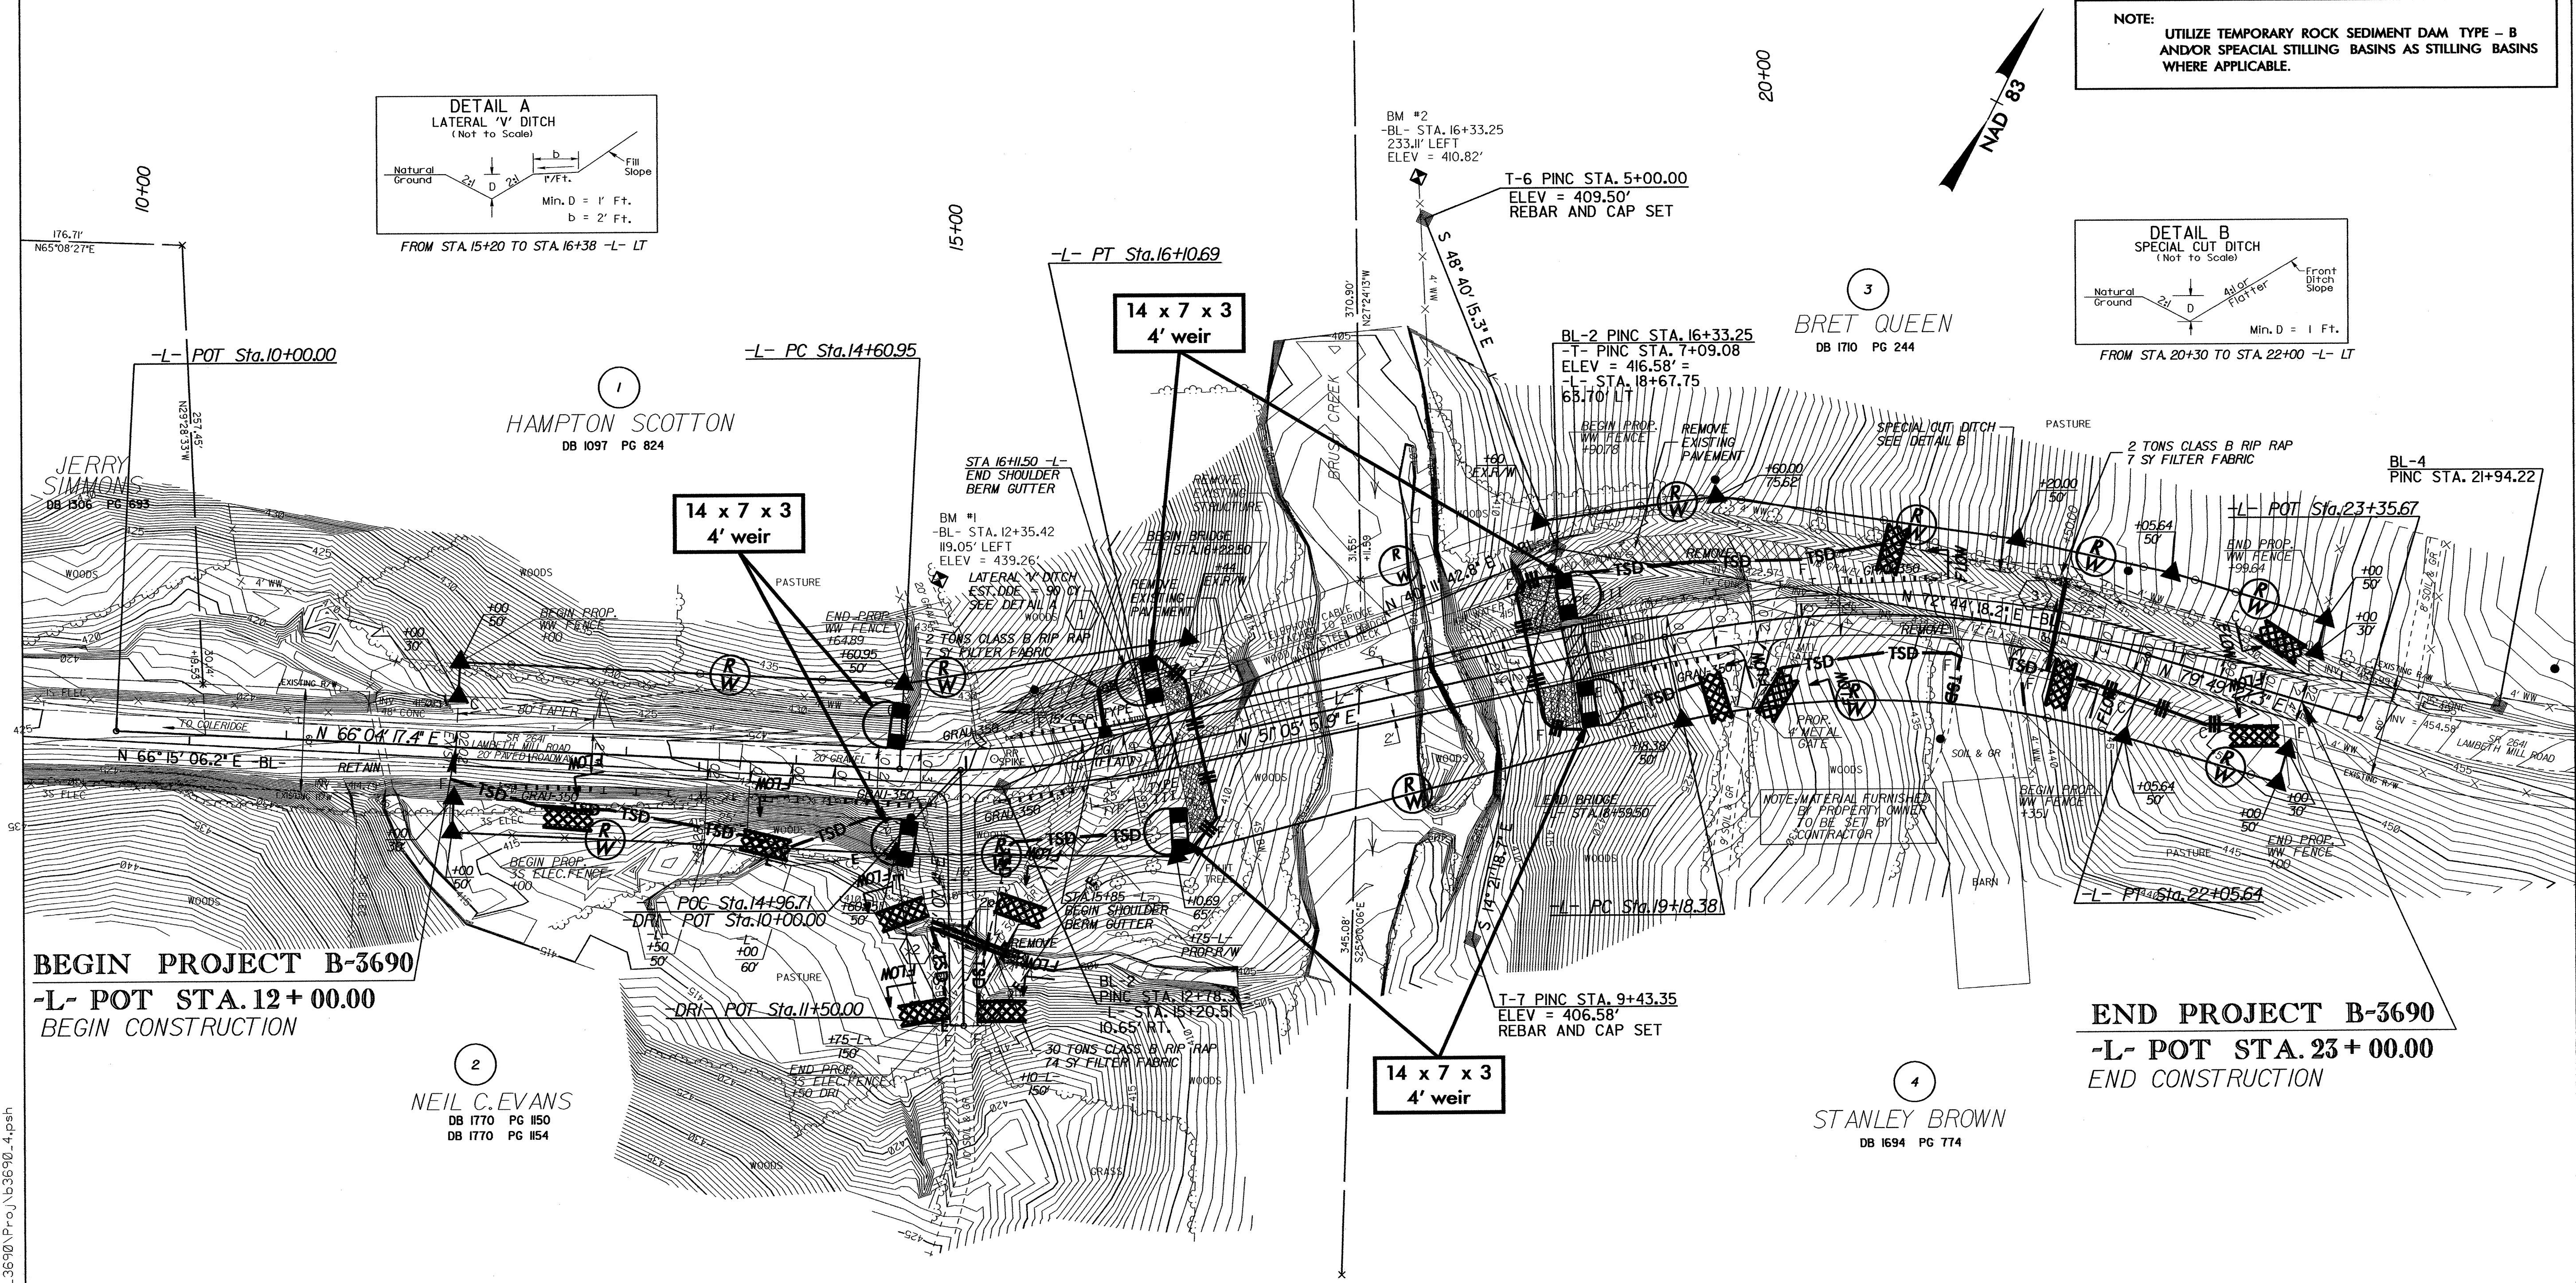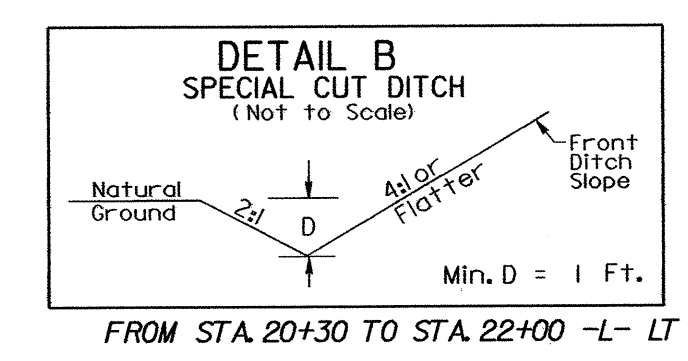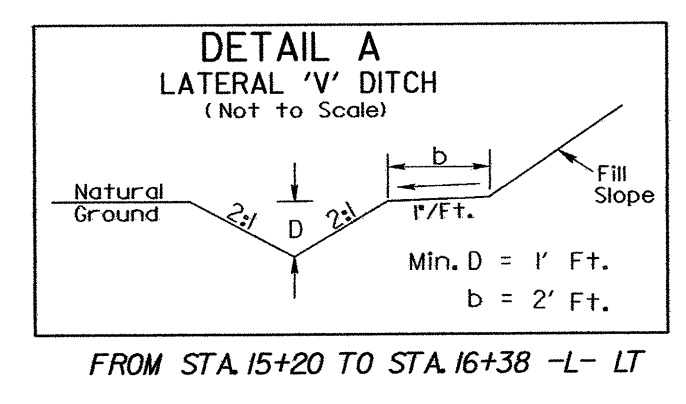

NOTES: (1) ALL DRIVEWAY RADII ARE 10' UNLESS SHOWN OTHERWISE  
 (2) SEE SHEET 5 FOR PROFILE -L- & -DRI-  
 (3) SEE SHEETS S-1 TO S- FOR STRUCTURE PLANS