



PAVEMENT SCHEDULE	
C1	PROP. APPROX. 60 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 72 kg PER SQ. METER IN EACH OF TWO LAYERS.
C1A	PROP. APPROX. 40 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 96 kg PER SQ. METER.
C2	PROP. APPROX. 70 mm ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 84 kg PER SQ. METER IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 30 mm IN DEPTH OR GREATER THAN 40 mm IN DEPTH.
C4	PROP. VAR. DEPTH ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 2.40 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 30 mm IN DEPTH OR GREATER THAN 40 mm IN DEPTH.
D1	PROP. APPROX. 80 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B AT AN AVERAGE RATE OF 196 kg PER SQ. METER.
D2	PROP. APPROX. 110 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 269.50 kg PER SQ. METER.
D3	PROP. APPROX. 120 mm ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 147 kg PER SQ. METER IN EACH OF TWO LAYERS.
D4	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 55 mm IN DEPTH OR GREATER THAN 110 mm IN DEPTH.
D5	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 55 mm IN DEPTH OR GREATER THAN 110 mm IN DEPTH.
E1	PROP. APPROX. 80 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 196 kg PER SQ. METER.
E2	PROP. APPROX. 100 mm ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 245.0 kg PER SQ. METER.
E3	PROP. APPROX. 150 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 183.75 kg PER SQ. METER IN EACH OF TWO LAYERS.
E3A	PROP. APPROX. 120 mm ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 294.0 kg PER SQ. METER.
E4	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
E5	PROP. VAR. DEPTH ASPHALT CONC. BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 2.45 kg PER SQ. METER PER 1 mm DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 75 mm IN DEPTH OR GREATER THAN 140 mm IN DEPTH.
R	750 mm CONCRETE CURB AND GUTTER.
S	100 mm CONCRETE SIDEWALK.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
W	VARIABLE DEPTH ASPHALT PAVEMENT. (SEE WEDGING DETAIL - THIS SHEET)
X	MILL EXISTING ASPHALT PAVEMENT

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

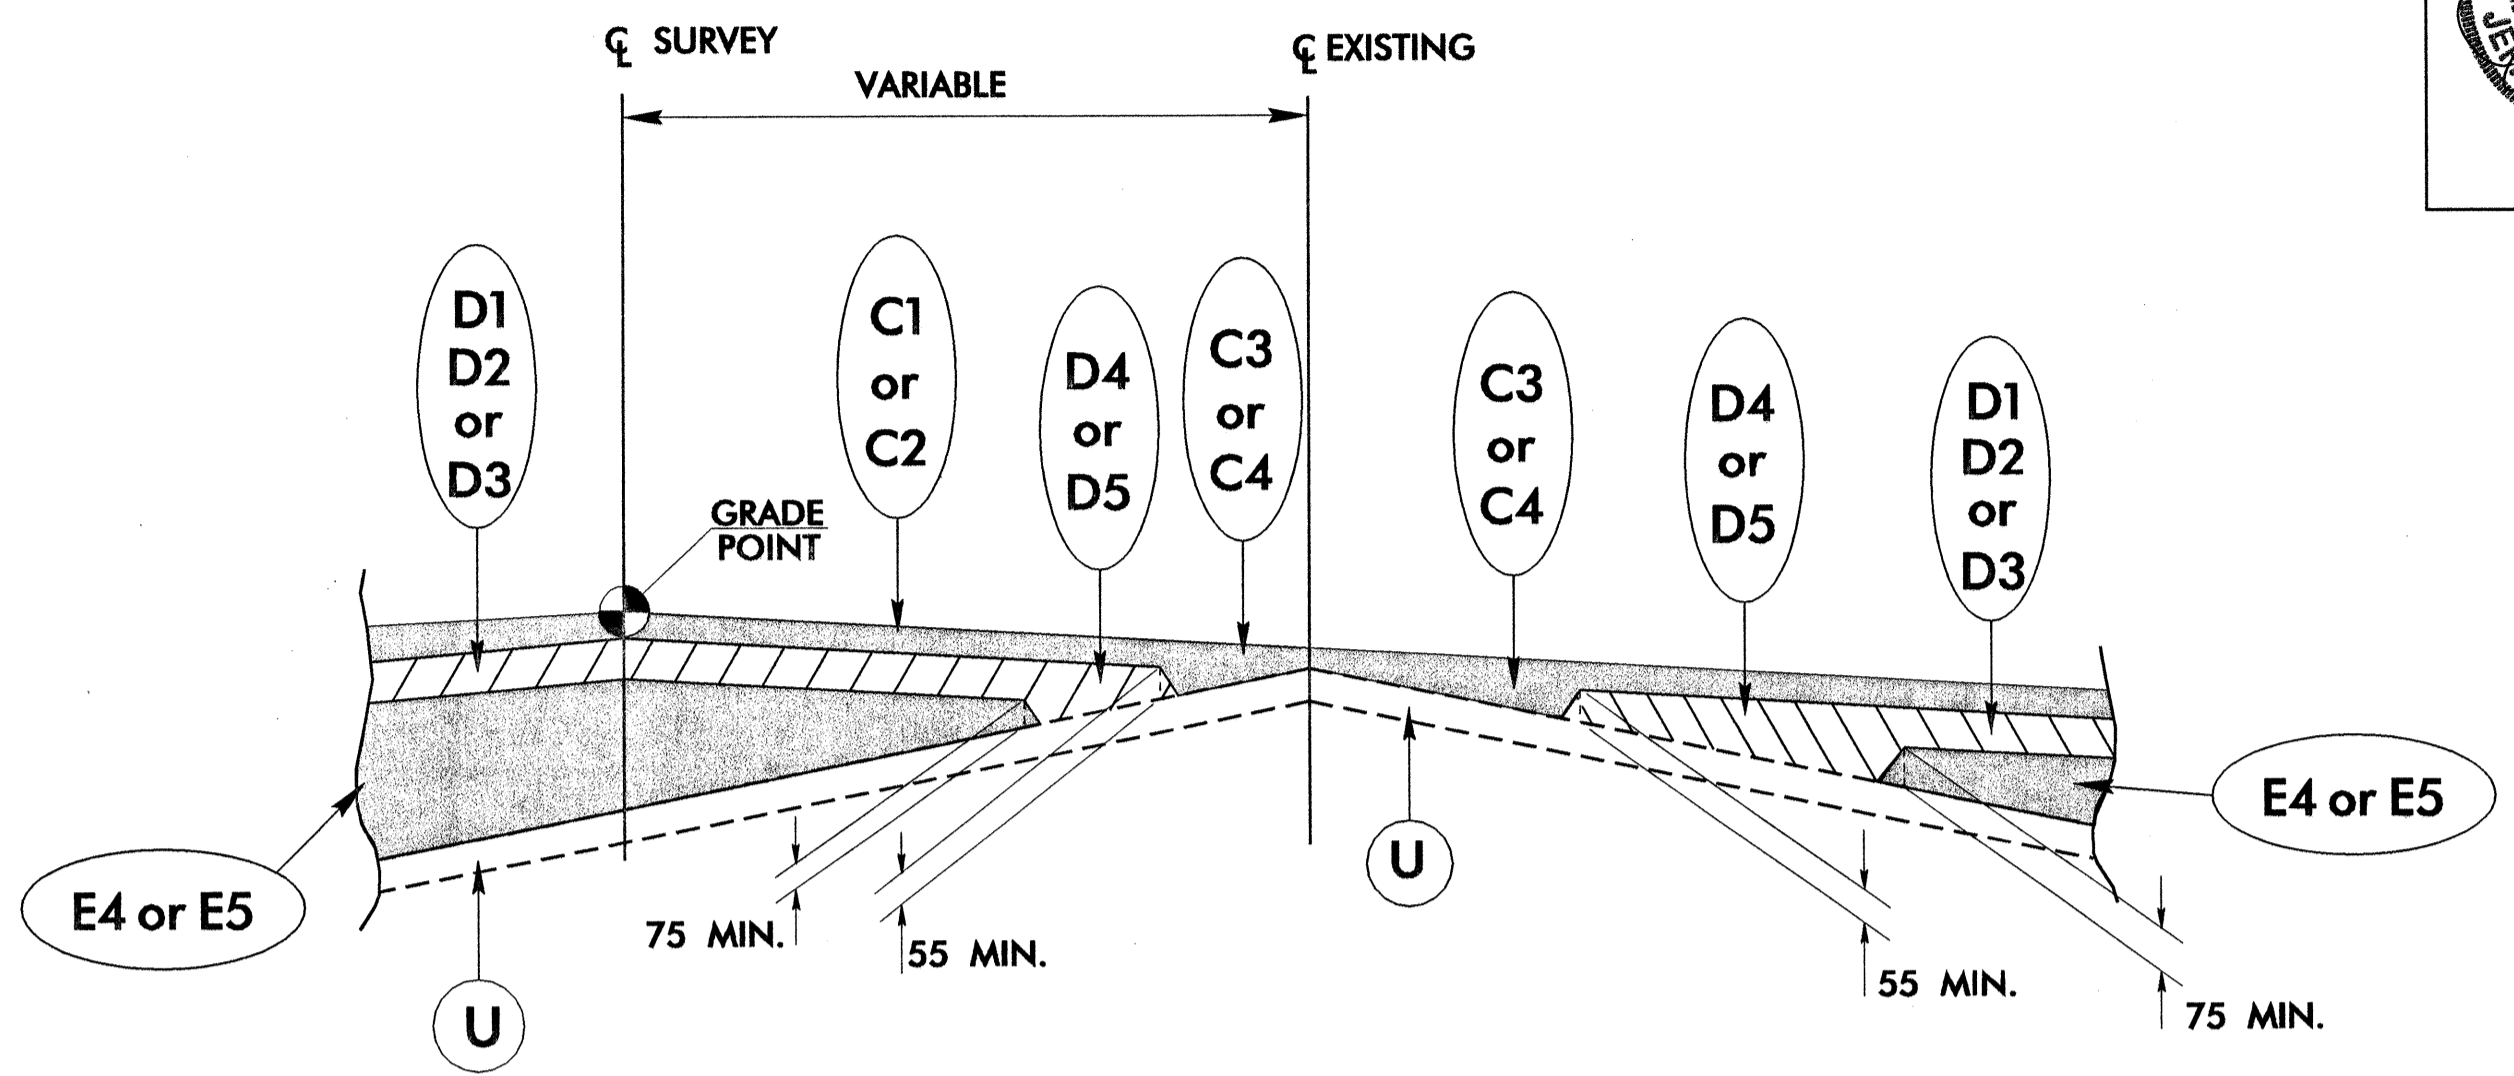

Detail Showing Method of Wedging

- NOTE: FOR WEDGING ON -L-, -Y5-, -Y6-, -Y9-, -Y16-, -Y19-, -Y21-, -Y22-, -Y23-, -Y24-, -Y26-, -Y27-, -Y28, AND -Y29-, USE (C2), (C3), (D2), (D4), (E3), AND (E4).
- FOR WEDGING ON -Y2A-, -Y2B-, AND -Y3-. USE (C1), (C4), (D1), (D5), (E2), AND (E5).
- FOR WEDGING ON -Y17- AND -Y18- USE (C1), (C4), (D3), (D5), (E2), AND (E5).
- FOR WEDGING ON -Y15- AND -Y15A- USE (C1), (C4), (D3), (D5), (E1), AND (E5).
- FOR WEDGING ON -SR1- AND -SR2- USE (C1), (C4), (E1), AND (E5).

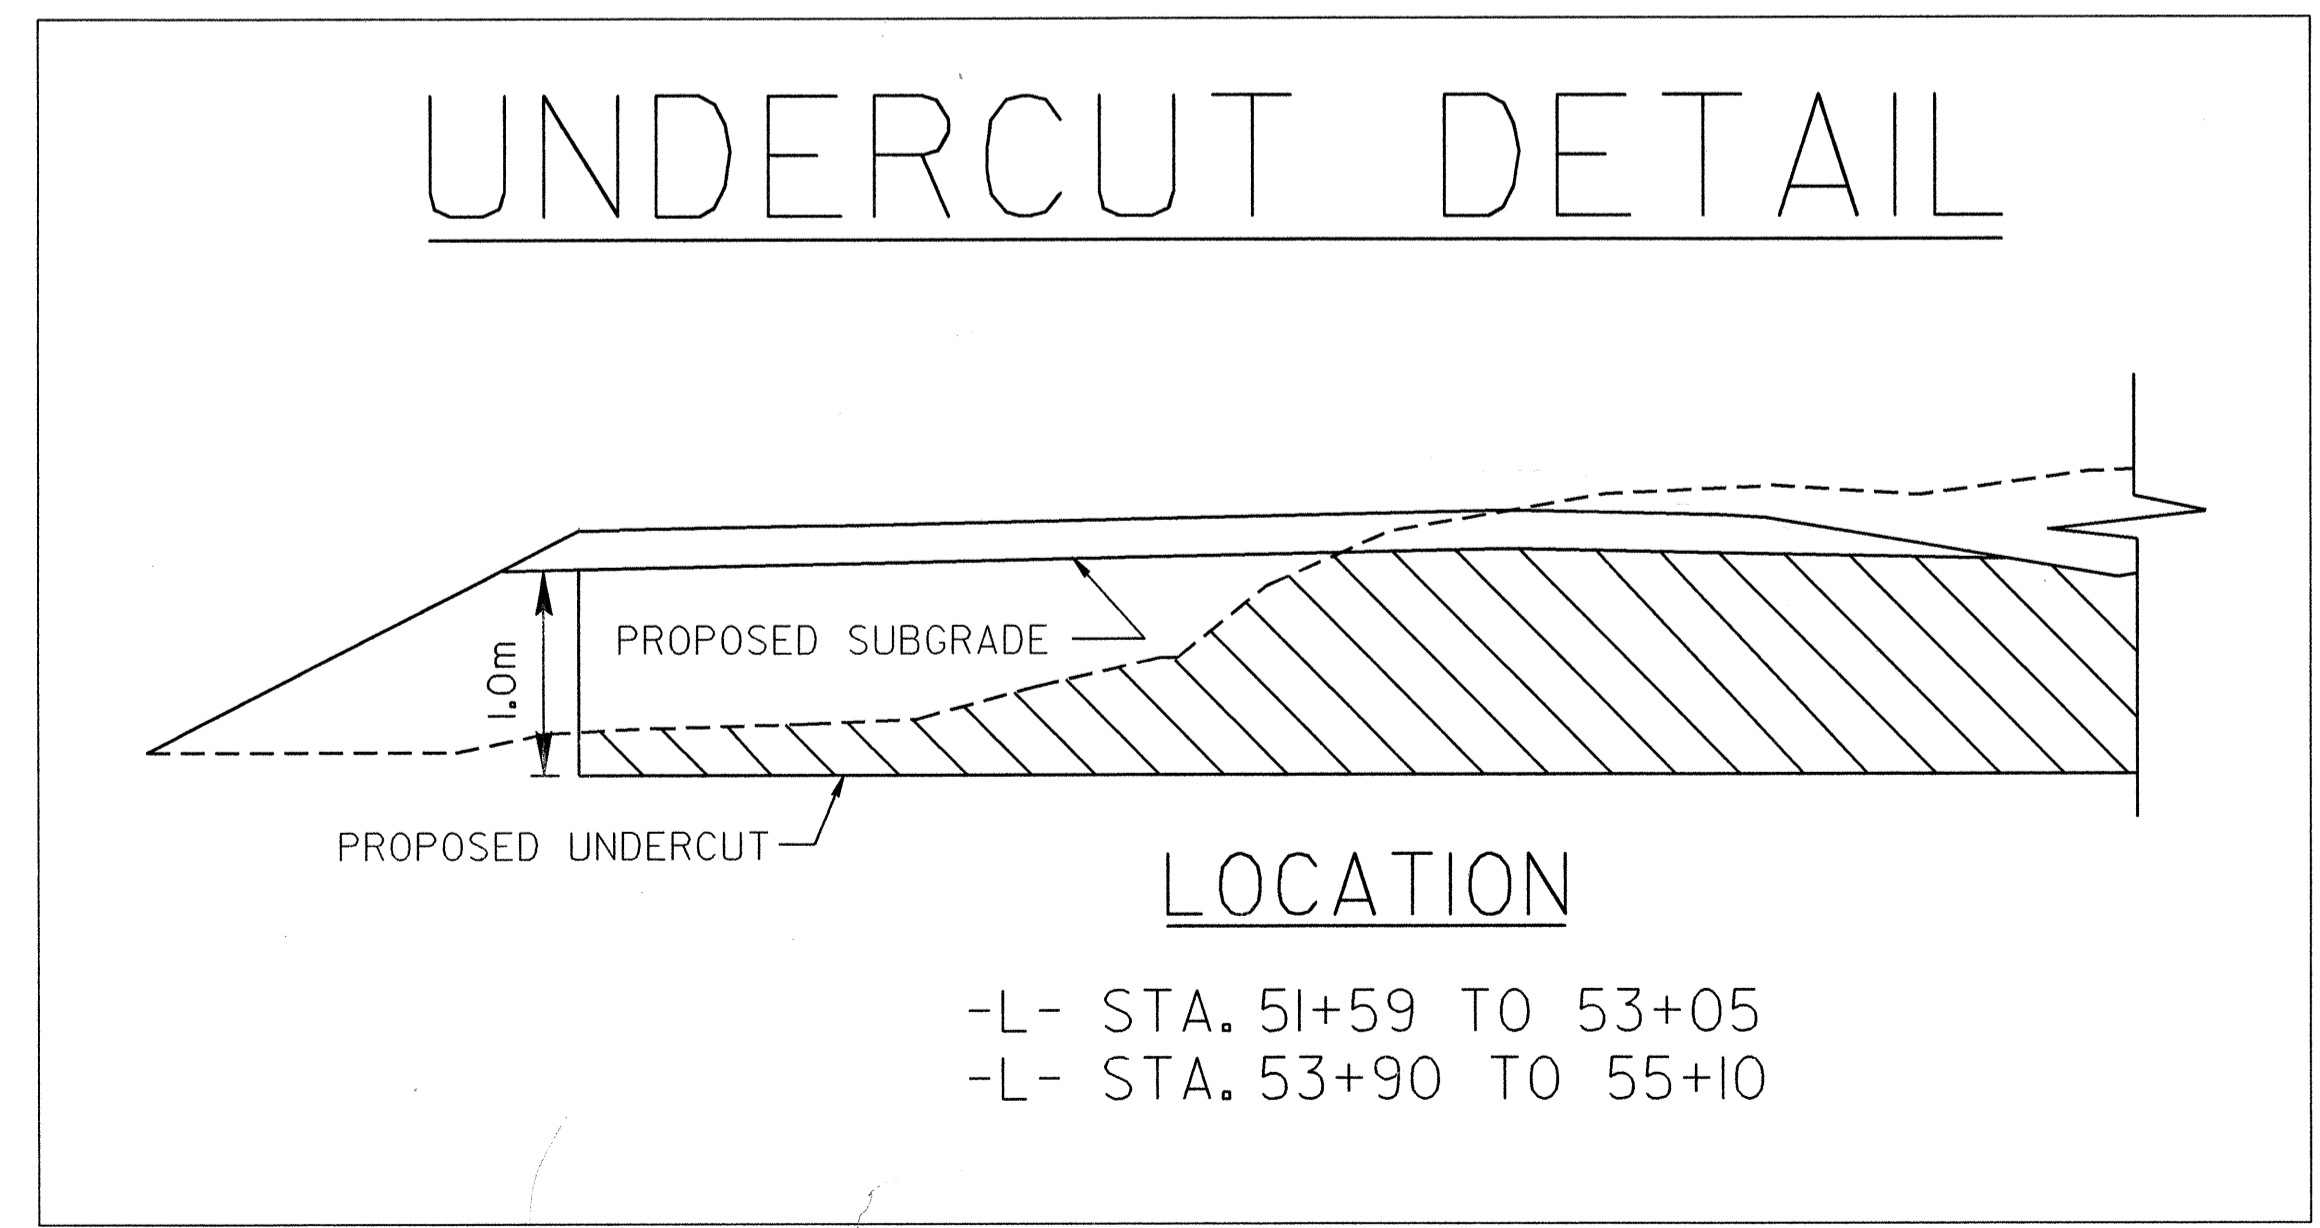

REVISIONS

8/17/98
 2:\SFC-2004\Projects\2408\Drawings\U2408\Drawings\U2408.dwg
 8/17/98