


| | | | |
|-----------------|-------------|-----------|--------------|
| STATE | PROJECT NO. | SHEET NO. | TOTAL SHEETS |
| N. C. | | | |
| F. A. PROJ. NO. | | | |

- GENERAL NOTES :
- THE 20' TRIPLE TUBULAR CORRUGATED BEAM RAIL SECTION SHALL BE FABRICATED BY WELDING TWO (2) 20' TRIPLE CORRUGATED BEAM RAIL ELEMENTS AS SHOWN AND THE GUARDRAIL SHALL CONFORM TO THE NCDOT STANDARD SPECIFICATIONS EXCEPT AS NOTED AND SHOWN ON THE PLANS.
 - 20' TRIPLE TUBULAR CORRUGATED BEAM RAIL SHALL BE 10 GAGE.
 - POSTS, BASE ANGLES AND/OR BASE PLATES, 6" DIA. TUBES, AND OFFSET BLOCKS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A-36. SHIMS SHALL MEET THE REQUIREMENTS OF ASTM A-570 GRADE 33 OR A-611 GRADE C.
 - POSTS, BASE ANGLES AND/OR BASE PLATES, TUBES, BLOCKS AND SHIMS SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A-123.
 - POSTS ARE TO BE PLUMB. SHIMS MAY BE USED BENEATH THE ROADWAY EDGE OF THE BASE ANGLES AND/OR BASE PLATES AS NECESSARY FOR POST ALIGNMENT. PROVIDE ONE 1/8" AND TWO 1/16" STEEL SHIMS FOR 25% OF THE POSTS ON THE BRIDGE.
 - POST HEIGHT TO BE DETERMINED IN THE FIELD BY THE CONTRACTOR.
 - PROPOSED RAIL POST MAY BE SHIFTED SLIGHTLY TO CLEAR REINFORCING STEEL. STANDARD SLOTS MAY BE USED IN THE RAIL TO ALLOW ADJUSTMENT.
 - HOLES SHALL BE DRILLED HORIZONTAL OR VERTICAL USING A ROTARY DRILL OR A ROTARY IMPACT DRILL. IMPACT TOOLS WILL NOT BE PERMITTED. CARBIDE TIPPED BITS SHALL BE USED UNLESS REINFORCING STEEL IS ENCOUNTERED. AN APPROPRIATE BIT FOR DRILLING THROUGH REINFORCING STEEL SHALL BE USED WHEN NECESSARY. THE CONTRACTOR SHALL BE PREPARED TO DRILL THROUGH REINFORCING STEEL AT TIMES.
 - POST SPACINGS AS SHOWN ON THE PLANS SHALL BE CHECKED BEFORE HOLES ARE DRILLED IN THE 20' TRIPLE TUBULAR CORRUGATED BEAM RAIL. STANDARD SLOTS WILL BE ALLOWED. FIELD PUNCHING OF THE HOLES OR SLOTS WILL NOT BE PERMITTED.
 - A SEALANT WILL BE REQUIRED IN THE AREA OF THE ANCHOR BOLTS AND WILL BE PLACED IN THE FOLLOWING MANNER:
 - BEFORE THE BASE PLATE HAS BEEN SET IN PLACE, IF THE GROUT DOES NOT COMPLETELY FILL THE ANCHOR HOLE, SEAL THE AREA AROUND EACH CONCRETE ANCHOR BOLT TO KEEP MOISTURE FROM ENTERING THE HOLE.
 - AFTER THE BASE PLATE HAS BEEN SET IN PLACE AND BEFORE THE WASHERS AND NUTS HAVE BEEN PLACED ON THE BOLT, SEAL THE HOLE REMAINING AROUND THE ANCHOR BOLT. THE SEALANT SHALL BE A ONE-COMPONENT POLYSULFIDE GUN GRADE MEETING FEDERAL SPECIFICATION TT-S-230. SEALANT SHALL BE GRAY IN COLOR AND APPLIED ACCORDING TO THE MANUFACTURER'S RECOMMENDATION. THE FOLLOWING SEALANTS MEET THE ABOVE REQUIREMENTS:
 - "SONOLASTIC ONE PART", MANUFACTURED BY SONNEBORN-DESOTO CO., DES PLAINES, ILLINOIS, 60018.
 - "THOROSPAN ONE COMPONENT", MANUFACTURED BY STANDARD DRY WALL PRODUCTS, INC., MIAMI, FLORIDA, 33166.
 - "HORNFLEX ONE COMPONENT", MANUFACTURED BY W. R. GRACE AND CO., CAMBRIDGE, MASSACHUSETTS, 02140.

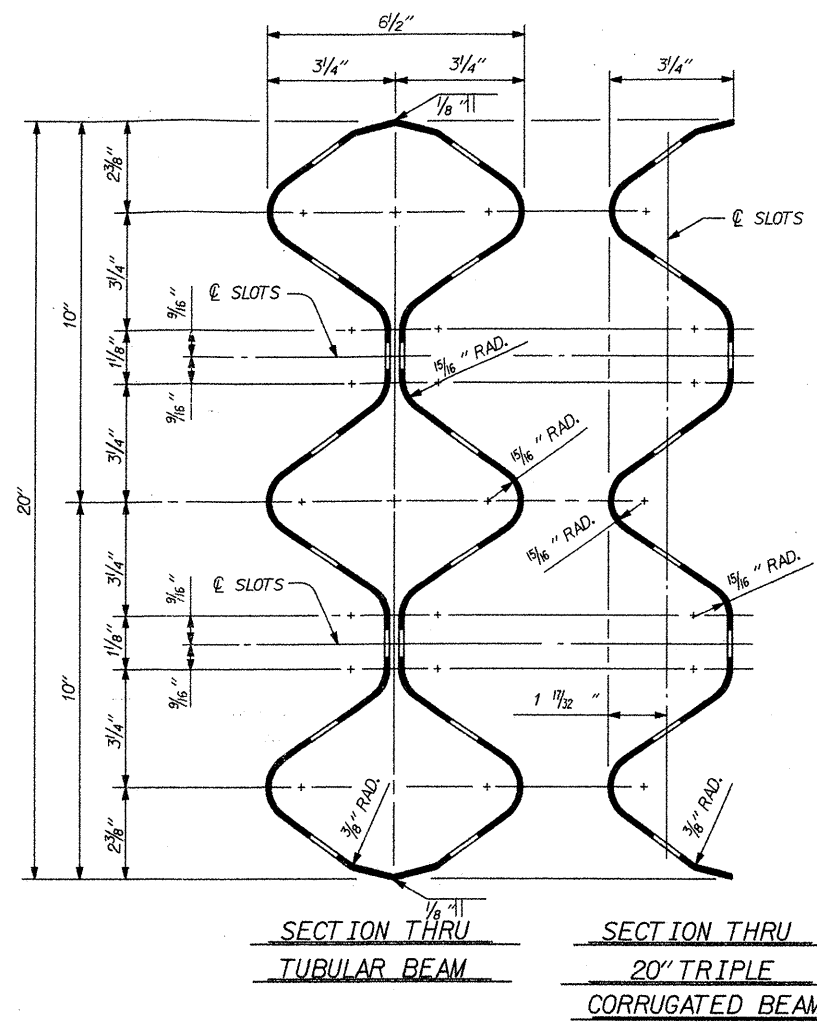


- CONCRETE ANCHOR NOTES :
- FOR ADHESIVELY ANCHORED BOLTS OR DOWELS, SEE ROADWAY SPECIAL PROVISIONS.
 - THE CONCRETE ANCHORS SHALL BE TESTED AS FOLLOWS :
 - THE CONTRACTOR SHALL TEST 5% OF THE TOTAL NUMBER OF BOLTS PER SPAN IN THE AREA OF THE CURB FOR LOAD TESTS AS DESCRIBED IN THE ROADWAY SPECIAL PROVISIONS.
 - THE ANCHOR BEING TESTED SHALL WITHSTAND A LOAD EQUAL TO 4220 POUNDS WHEN TESTED AS SPECIFIED IN THE ROADWAY SPECIAL PROVISIONS.
 - THE SUCCESSFULLY TESTED ANCHOR MAY BE USED IN THE FINAL RAIL ASSEMBLY, IF APPROPRIATELY LOCATED. IF NOT SO LOCATED, OR IF THE ANCHOR FAILS THE TEST, THE TEST AREA SHALL BE REPAIRED AS DAMAGED CONCRETE. SEE 'GENERAL NOTES'.
 - EMBEDMENT SHOWN ON THE PLANS IS A MINIMUM, BUT THE MANUFACTURER'S RECOMMENDATIONS SHALL BE FOLLOWED.
 - THE 3/4" DIAMETER CONCRETE ANCHOR SHALL CONSIST OF A STUD, THREADED ON ONE END, WITH NUT AND WASHERS. THE ANCHOR SHALL BE GALVANIZED TO CONFORM TO THE REQUIREMENTS OF ASTM A-153.
 - AT THE CONTRACTOR'S OPTION, STAINLESS STEEL ANCHORS MAY BE USED AS AN ALTERNATE FOR THE GALVANIZED CONCRETE ANCHORS. THEY SHALL MEET OR EXCEED THE MECHANICAL REQUIREMENTS FOR THE GALVANIZED ANCHORS. THE USE OF THIS ALTERNATE SHALL BE APPROVED BY THE ENGINEER.
 - EXPANSION ANCHORS WILL NOT BE PERMITTED.

NOTES :

TUBULAR BEAM POSTS ARE TO BE MOUNTED AGAINST THE EXISTING CONCRETE RAIL. HOLES FOR THE 5/8" DIAMETER BOLTS, THRU THE EXISTING CONCRETE RAIL OR POST, SHALL BE 3/4" DIAMETER.

5/8" DIAMETER BOLTS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A-307 AND SHALL BE GALVANIZED TO CONFORM TO THE REQUIREMENTS OF ASTM A-153.

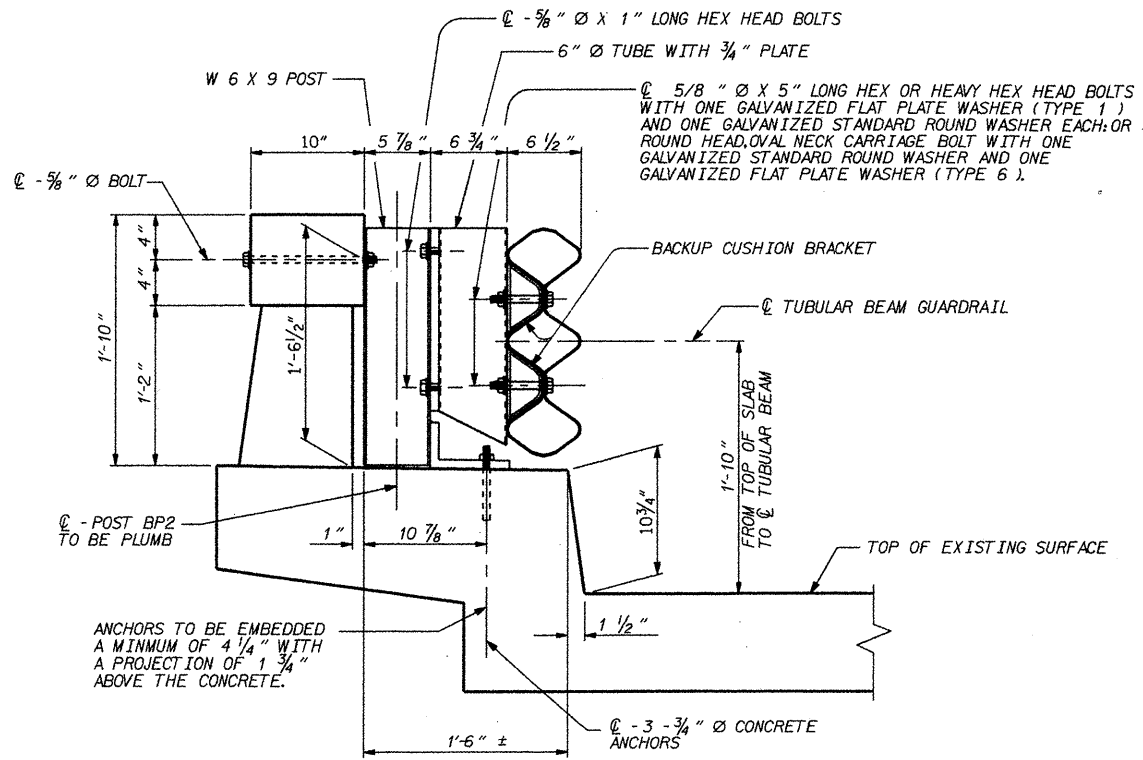


RETROFIT EXISTING RAIL WITH TUBULAR BEAM GUARDRAIL
(WITHOUT WEARING SURFACE)

BP2

ADDED TO CADD 5/88 BY: NMR CHECKED BY:

| | | |
|------------------------------|----------------|----------|
| ASSEMBLED BY : S.H. SOCKWELL | DATE : 7/22/04 | SPECIAL |
| CHECKED BY : B.C. HUNT | DATE : 7/22/04 | |
| DRAWN BY : N.M. RUFFIN | DATE : 5/88 | STANDARD |
| CHECKED BY : | DATE : | |

23-JUL-2004 08:37
*****SDGN*****



PROJECT NO. 37489
TYRELL COUNTY
STATION: _____

SHEET 2 OF 5

| | | | | | | |
|---|-----|-------|-----|-----|-------|---------------------|
| STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH | | | | | | SHEET NO. 8 |
| DETAILS FOR RETROFIT OF EXISTING BRIDGE RAIL WITH TUBULAR BEAM GUARDRAIL | | | | | | |
| REVISIONS | | | | | | TOTAL SHEETS 116 |
| NO. | BY: | DATE: | NO. | BY: | DATE: | |
| 1 | | | 3 | | | |
| 2 | | | 4 | | | |

RP2. RRF