


5/28/99

REVISIONS


PROJECT REFERENCE NO. 37489	SHEET NO. 4
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
HDR Engineering, Inc. of the Carolinas 128 S. Tryon Street, Suite 1400 • Charlotte, N.C. 28202	

C	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD.
C1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
D	PROP. APPROX. 2 1/4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 256.5 LBS. PER SQ. YD.
E	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T	SHOULDER RECONSTRUCTION
U	EXISTING PAVEMENT.
V	MILLING BITUMINOUS PAVEMENT 1 1/4" DEPTH.


NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS OTHERWISE SHOWN

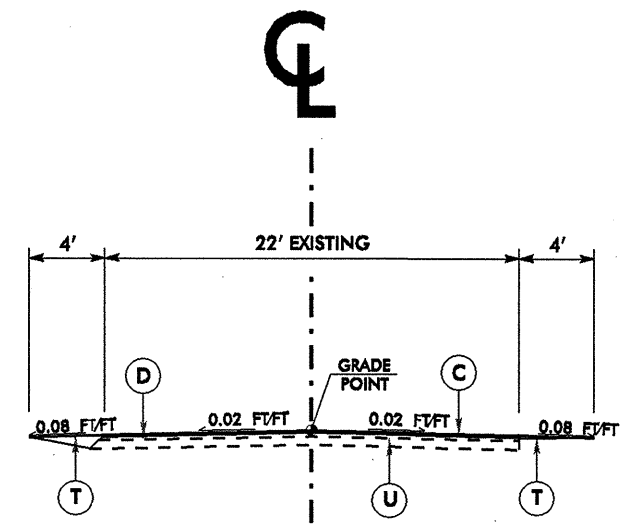

**TYPICAL SECTION NO. 3**  
USE WITH MAP 3

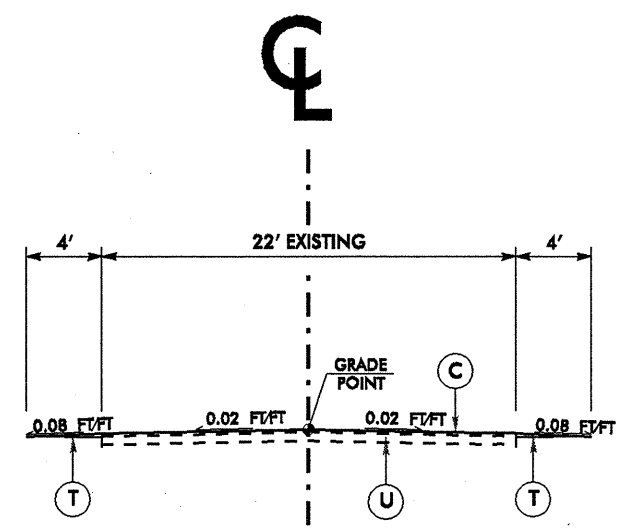

**TYPICAL SECTION NO. 4**  
USE WITH MAP 4

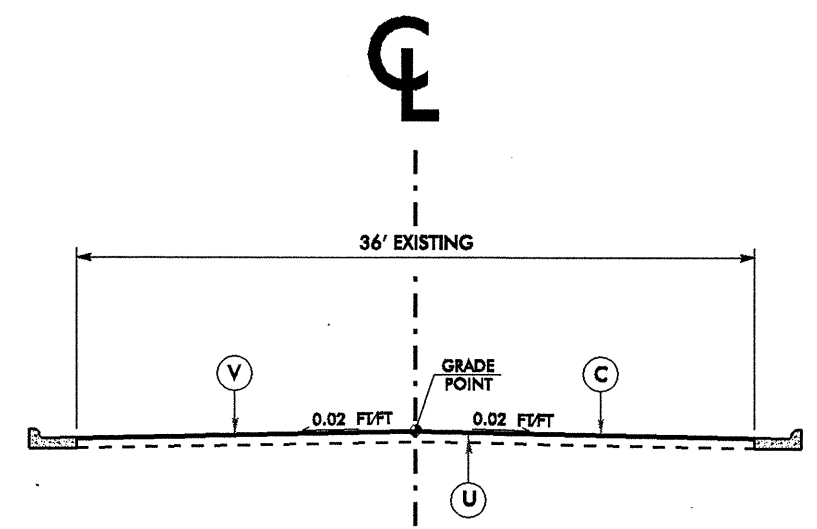

**TYPICAL SECTION NO. 5**  
USE WITH MAP 5

P420867-207/NC SH Typical Section 4