



NOTE: STA 0+00 STARTS AT NEW PAVEMENT JOINT WEST OF (SR1158) HUFFMAN MILL RD.


PROJECT NO.	SHEET NO.	TOTAL SHEETS
38183.3.1 (1-4713)	5	8

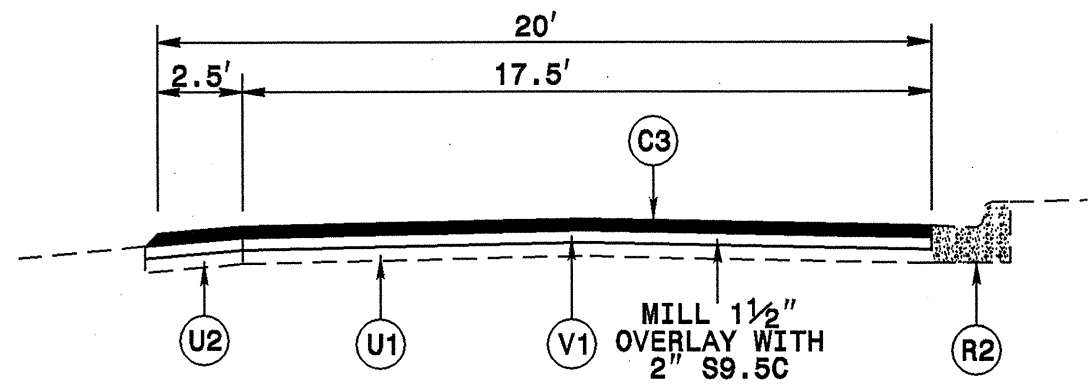


TYPICAL SECTION NO. 6

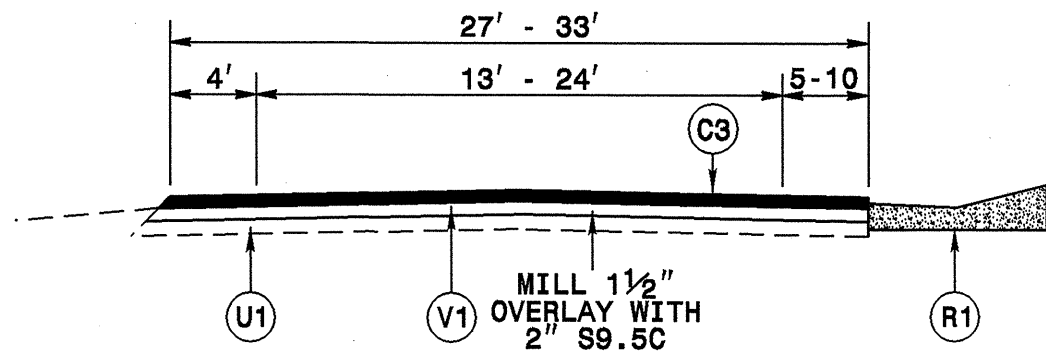


TYPICAL SECTION NO. 9

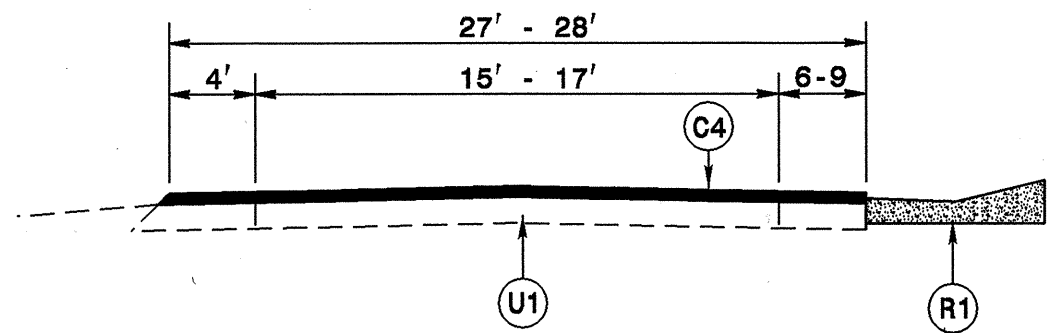

TYPICAL SECTION NO. 7

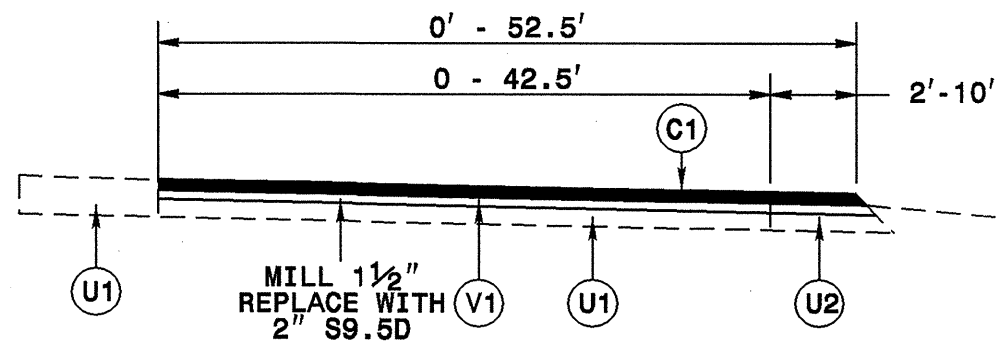

TYPICAL SECTION NO. 10

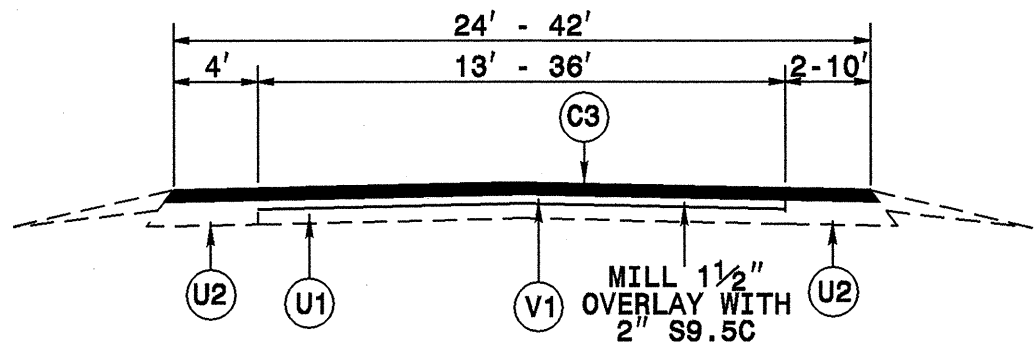

TYPICAL SECTION NO. 8

V1	MILLING BITUMINOUS PAVEMENT 1 1/2" DEPTH.
V2	MILLING BITUMINOUS PAVEMENT 2" DEPTH.
V3	MILLING BITUMINOUS PAVEMENT 3" DEPTH.
V4	MILLING BITUMINOUS PAVEMENT 4 1/2" DEPTH.
V5	MILLING BITUMINOUS PAVEMENT 0 - 1 1/2" DEPTH.
V6	MILLING BITUMINOUS PAVEMENT 0 - 2" DEPTH.
V7	MILLING BITUMINOUS PAVEMENT 1 1/2 - 2" DEPTH.
V8	MILLING BITUMINOUS PAVEMENT 3 - 4 1/2" DEPTH.

C1	PROP. APPROX. 2" ASPHALT. CONC. SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.		
C2	PROP. APPROX. 1 1/2" ASPHALT. CONC. SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
C3	PROP. APPROX. 2" ASPHALT. CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.		
C4	PROP. APPROX. 1 1/2" ASPHALT. CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
D1	PROP. APPROX. 3" ASPHALT. CONC. INTERMEDIATE COURSE, TYPE I19.0D, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.		
D2	PROP. APPROX. 3" ASPHALT. CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.		
D3	PROP. APPROX. 4 1/2" ASPHALT. CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.		
E	PROP. APPROX. 11" ASPHALT. CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD. IN EACH OF TWO LAYERS		
R1	EXPRESS GUTTER	U1	EXISTING TRAVELWAY.
R2	2-6 CURB AND GUTTER	U2	EXISTING PAVED SHOULDER.
T	EARTH MATERIAL		

18-JAN-2005 08:09
g:\Projects\18183.3.1\I-4713-Typicals.dgn
dsnuller AI PSU214566