


8/17/09

05-JAN-2005 09:43
A:\proj\10-08-08\10-08-08.dwg
G:\10-08-08\10-08-08.dwg

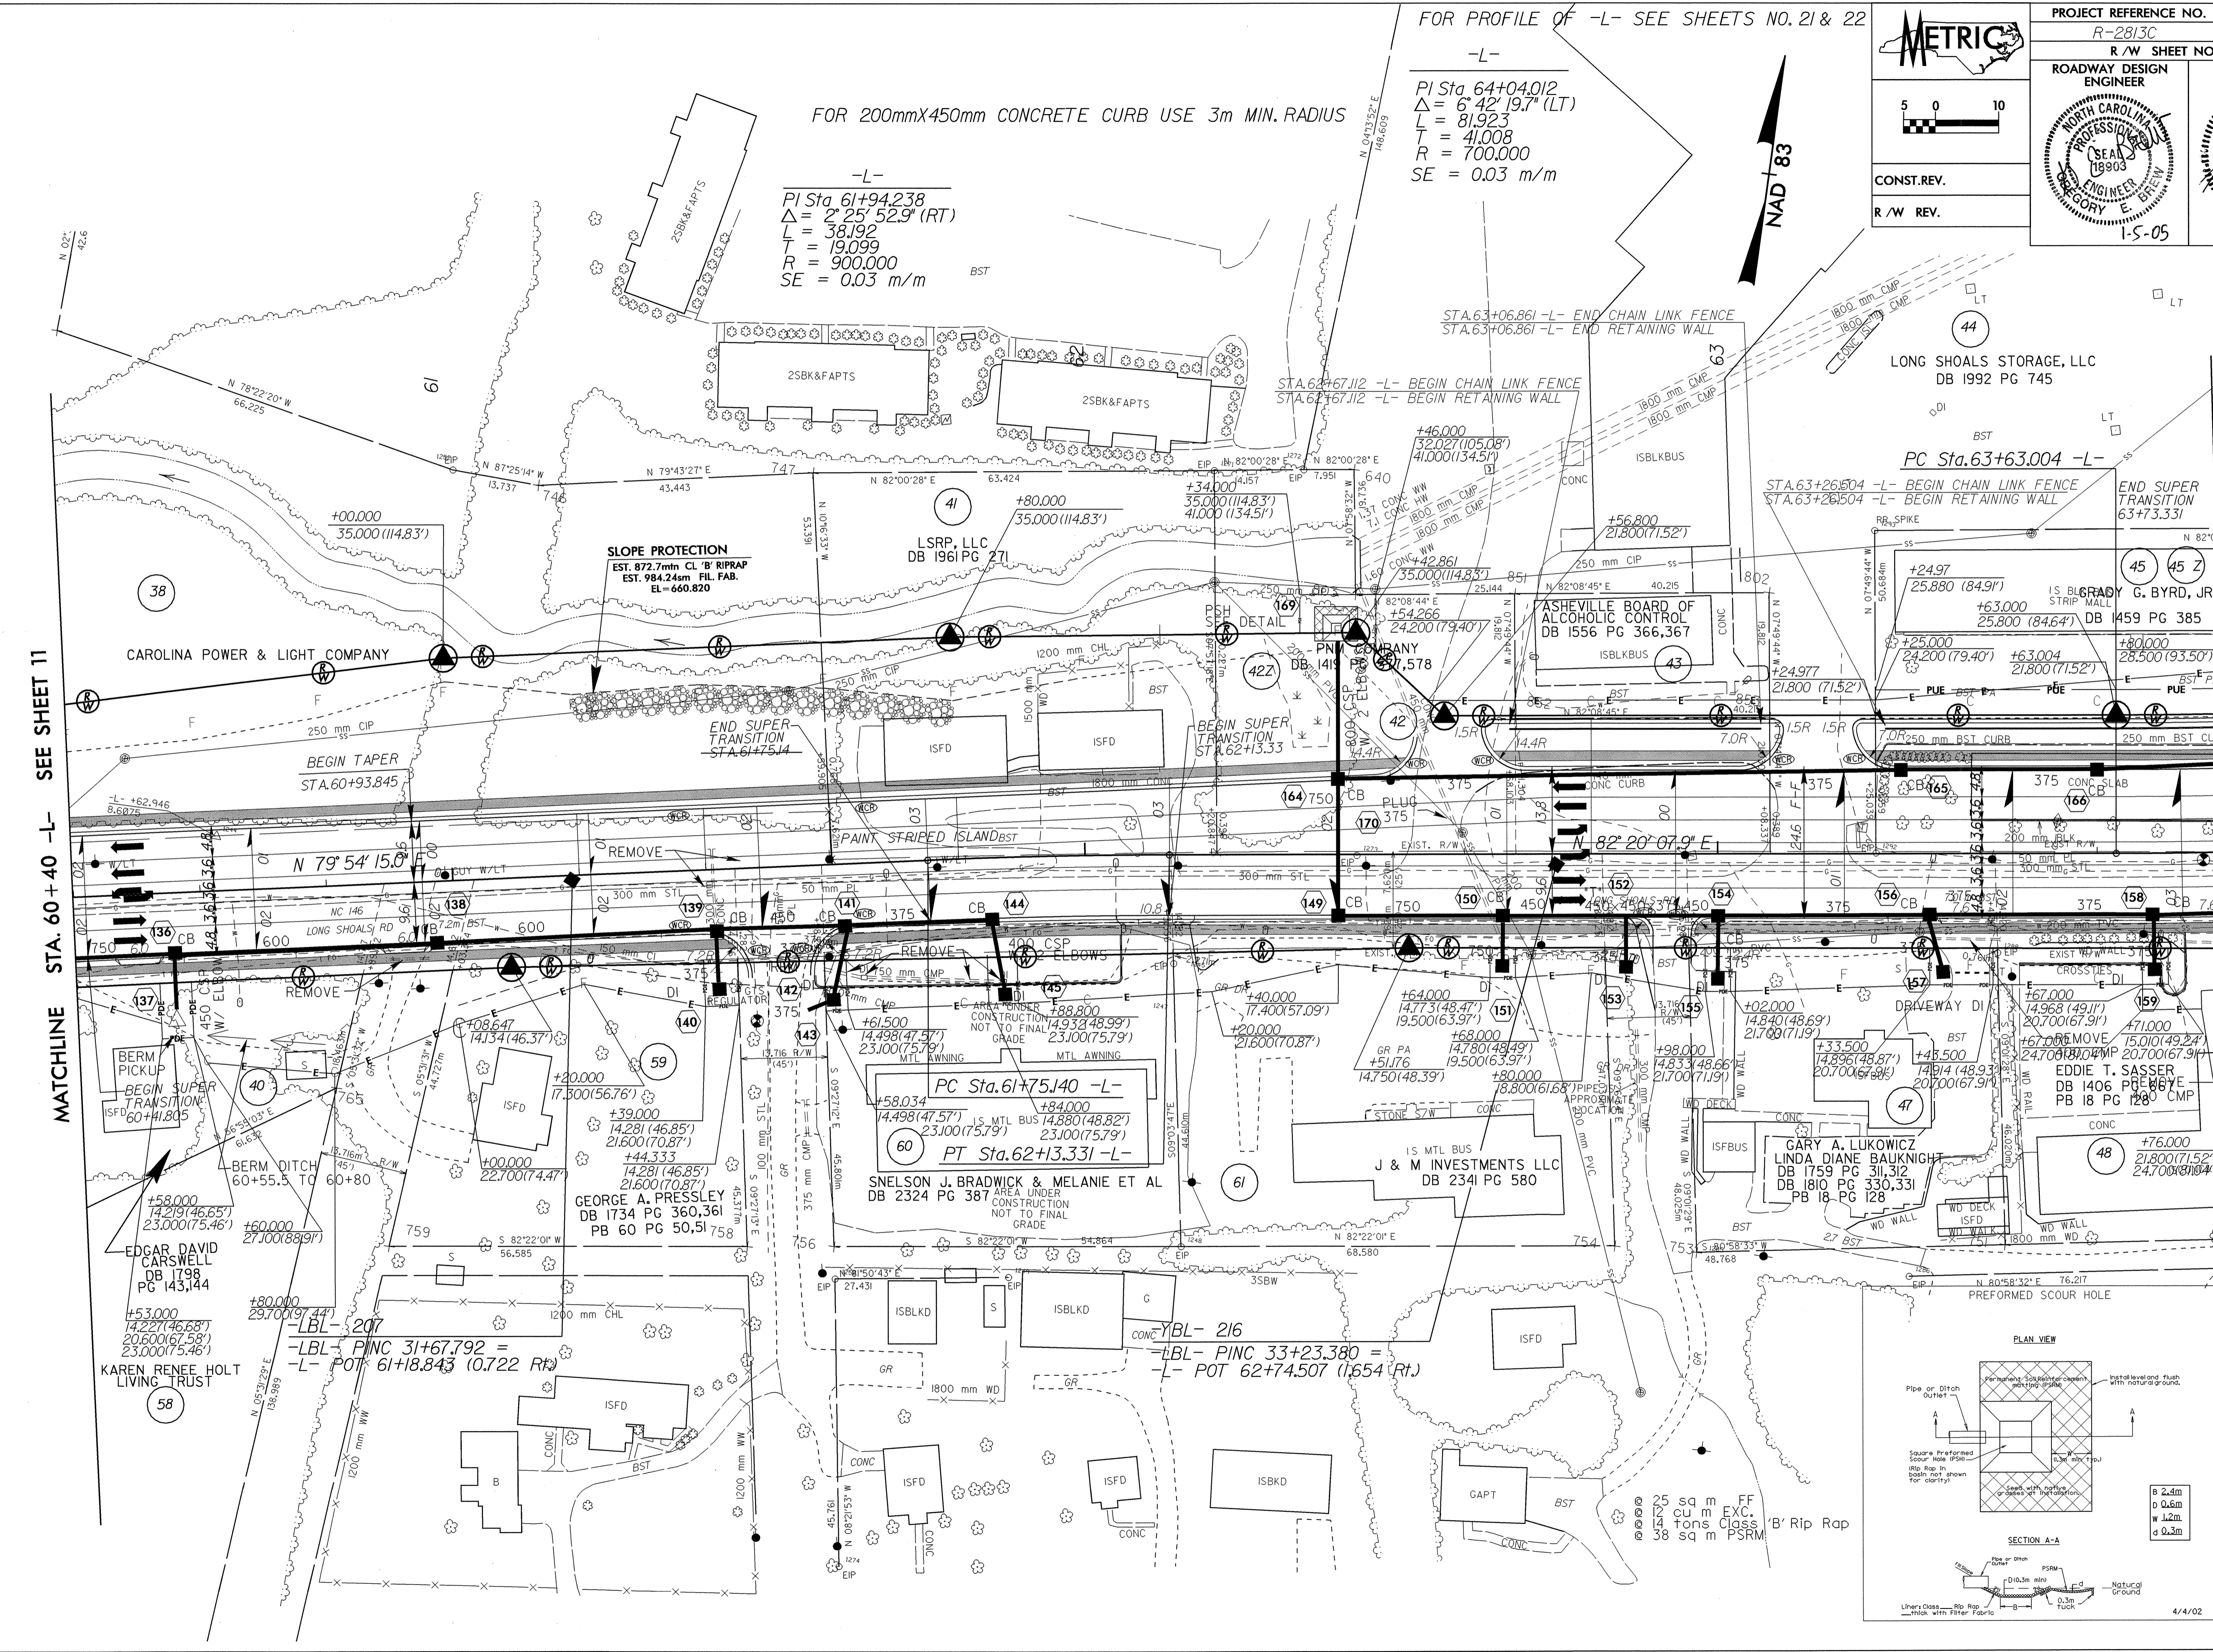

FOR PROFILE OF -L- SEE SHEETS NO. 21 & 22

-L-

PI Sta 64+04.012
 $\Delta = 6^{\circ} 42' 19.7''$ (LT)
 $L = 81.923$
 $T = 41.008$
 $R = 700.000$
 $SE = 0.03$ m/m

FOR 200mmX450mm CONCRETE CURB USE 3m MIN. RADIUS

-L-

PI Sta 61+94.238
 $\Delta = 2^{\circ} 25' 52.9''$ (RT)
 $L = 38.192$
 $T = 19.099$
 $R = 900.000$
 $SE = 0.03$ m/m

	PROJECT REFERENCE NO.	R-2813C	SHEET NO.	12
	R/W SHEET NO.	12		
CONST. REV.				
R/W REV.				

 GREGORY E. BREW ENGINEER 1-5-05	 GREG T. SHOWN ENGINEER 1-6-05
---	---

MATCHLINE STA. 60+40 -L- SEE SHEET 11

MATCHLINE STA. 63+80 -L- SEE SHEET 13

