

Pay Item Notes:

- 1 RELOCATE SIGN, TYPE A (OVERHEAD)
- 2 RELOCATE SIGN, TYPE B (OVERHEAD)
- 3 RELOCATE SIGN, TYPE A (GROUND MOUNTED)
- 4 RELOCATE SIGN, TYPE B (GROUND MOUNTED)
- 5 RELOCATE SIGN, TYPE D
- 6 RELOCATE SIGN, TYPE E
- 7 RELOCATE SIGN, TYPE F
- 8 RELOCATE SIGN, MILEMARKERS
- 9 RELOCATE SUPPORT, OVERHEAD SIGN SYSTEM
- 10 RELOCATE SUPPORT, STEEL BEAM
- 11 RELOCATE LIGHTING SYSTEM
- 12 RELOCATE SUPPORT, WOOD
- 13 STOCKPILE SUPPORT, STEEL BEAM
- 14 DISPOSAL OF SUPPORT, STEEL BEAM
- 15 STOCKPILE SUPPORT, WOOD
- 16 DISPOSAL OF SUPPORT, WOOD
- 17 STOCKPILE SUPPORT, OVERHEAD STRUCTURE
- 18 DISPOSAL OF SUPPORT, OVERHEAD STRUCTURE
- 19 STOCKPILE SIGN SYSTEM, OVERHEAD
- 20 DISPOSAL OF SIGN SYSTEM, OVERHEAD
- 21 STOCKPILE SIGN SYSTEM, STEEL BEAM
- 22 DISPOSAL OF SIGN SYSTEM, STEEL BEAM
- 23 STOCKPILE SIGN SYSTEM, U-CHANNEL
- 24 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 25 STOCKPILE SIGN SYSTEM, WOOD
- 26 DISPOSAL OF SIGN SYSTEM, WOOD
- 27 STOCKPILE SUPPORT, U-CHANNEL
- 28 DISPOSAL OF SUPPORT, U-CHANNEL
- 29 STOCKPILE SIGN, A OR B (OVERHEAD)
- 30 DISPOSAL OF SIGN, A OR B (OVERHEAD)
- 31 STOCKPILE SIGN, A OR B (GROUND MOUNTED)
- 32 DISPOSAL OF SIGN, A OR B (GROUND MOUNTED)
- 33 STOCKPILE SIGN, D, E OR F
- 34 DISPOSAL OF SIGN, D, E OR F
- 35 STOCKPILE SIGN, MILEMARKERS
- 36 DISPOSAL OF SIGN, MILEMARKERS
- 37 DISPOSAL OF SIGN, OVERLAY (OVERHEAD)
- 38 DISPOSAL OF SIGN, OVERLAY (GROUND MOUNTED)
- 39 STOCKPILE LIGHTING SYSTEM
- 40 DISPOSAL OF LIGHTING SYSTEM
- 41 STOCKPILE LIGHTING FIXTURES
- 42 DISPOSAL OF LIGHTING FIXTURES
- 43 STOCKPILE WALKWAY
- 44 DISPOSAL OF WALKWAY
- 45 SIGN ERECTION, TYPE A (OVERHEAD)
- 46 SIGN ERECTION, TYPE B (OVERHEAD)
- 47 SIGN ERECTION, TYPE A (GROUND MOUNTED)
- 48 SIGN ERECTION, TYPE B (GROUND MOUNTED)
- 49 SIGN ERECTION, TYPE D, E, AND F
- 50 SIGN ERECTION, OVERLAY (OVERHEAD)
- 51 SIGN ERECTION, OVERLAY (GROUND MOUNTED)
- 52 SIGN ERECTION, REPOSITION OVERHEAD

General Notes:


- . SIGNS FURNISHED BY STATE
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING OR PAVEMENT MARKINGS. SEE TRAFFIC CONTROL PLANS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE III REFLECTIVE SHEETING.
- . THE CONTRACTOR SHALL BE REQUIRED TO SUBMIT TO THE N.C.D.O.T. FOR APPROVAL, DETAIL DRAWINGS OF LUMINAIRE RETRIEVAL SYSTEM MOUNTING ON OHS ASSEMBLY.
- . THE CONTRACTOR SHALL USE LUMINAIRE RETRIEVAL SYSTEM ON ALL OVERHEAD STRUCTURES. WALKWAY AND HANDRAIL IS NOT REQUIRED.
- . INSTALLATION OF LUMINAIRE RETRIEVAL SYSTEM SHALL ALLOW LUMINAIRE MAINTENACE FROM THE SHOULDER WITHOUT THE NEED FOR LANE CLOSURE. THE DRIVE HANDLE OF THE LUMINAIRE RETRIEVAL SYSTEM SHALL BE LOCATED A MINIMUM OF 0.92M (3 ') FROM THE RIGHT EDGE OF THE SHOULDER AWAY FROM THE ROADWAY TRAFFIC.
- . THE CONTRACTOR SHALL ENSURE THAT COORDINATION IS ESTABLISHED BETWEEN THE OHS ASSEMBLY AND LUMINAIRE RETRIEVAL SYSTEM FABRICATORS SO THAT A FULLY FUNCTIONAL SIGN AND LIGHTING SYSTEM IS INSTALLED. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ANY OHS ASSEMBLY AND LUMINAIRE RETRIEVAL SYSTEM INCOMPATIBILITIES, OR INSTALLATION OF A LIGHTING SYSTEM NOT FUNCTIONING TO ITS INTENDED PURPOSE.

Type "E" Signs:

(451)	QUANTITY REQ'D <u> 2 </u>
<div style="border: 1px solid black; padding: 5px; width: 100px; margin: 0 auto;"> <p style="text-align: center; margin: 0;">RAMP</p> <hr style="border: 0; border-top: 1px solid black; margin: 2px 0;"/> <p style="text-align: center; font-size: 24pt; margin: 0;">45</p> <p style="text-align: center; margin: 0;">M.P.H.</p> </div>	48 X 60 W13-3
TWO "U" POSTS PER SIGN	

NOTE: THIS DRAWING IS DIMENSIONED IN INCHES UNLESS OTHERWISE DEPICTED WITHIN THE DRAWING.

HNTB HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609

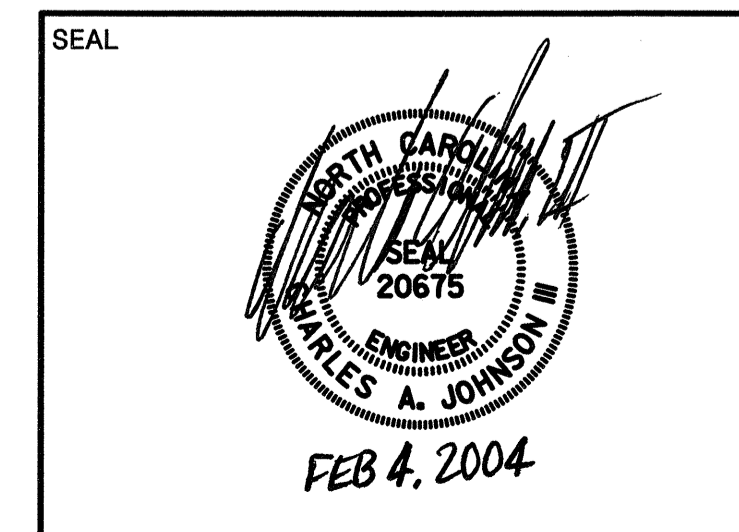

NOTES &
TYPE "E" SIGNS