



NOTE: UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B AS STILLING BASIN WHERE APPLICABLE.

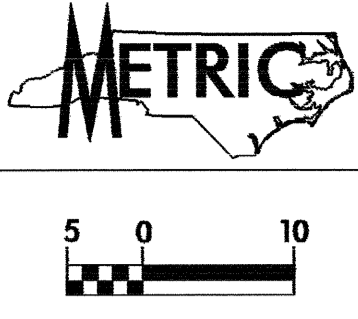

-DET-

PI Sta 10+11.615	PI Sta 11+62.483
$\Delta = 10^{\circ} 37' 01.6" (LT)$	$\Delta = 36^{\circ} 08' 59.6" (RT)$
L = 23.163	L = 94.640
T = 11.615	T = 48.955
R = 125.000	R = 150.000

NOTE: SHOULDER BERM GUTTER REQUIRED AT THE FOLLOWING APPR. STATIONS
 -L- STA. 12+58 TO 12+66.38+ RT
 -L- STA. 13+13.62+ TO 13+26 RT

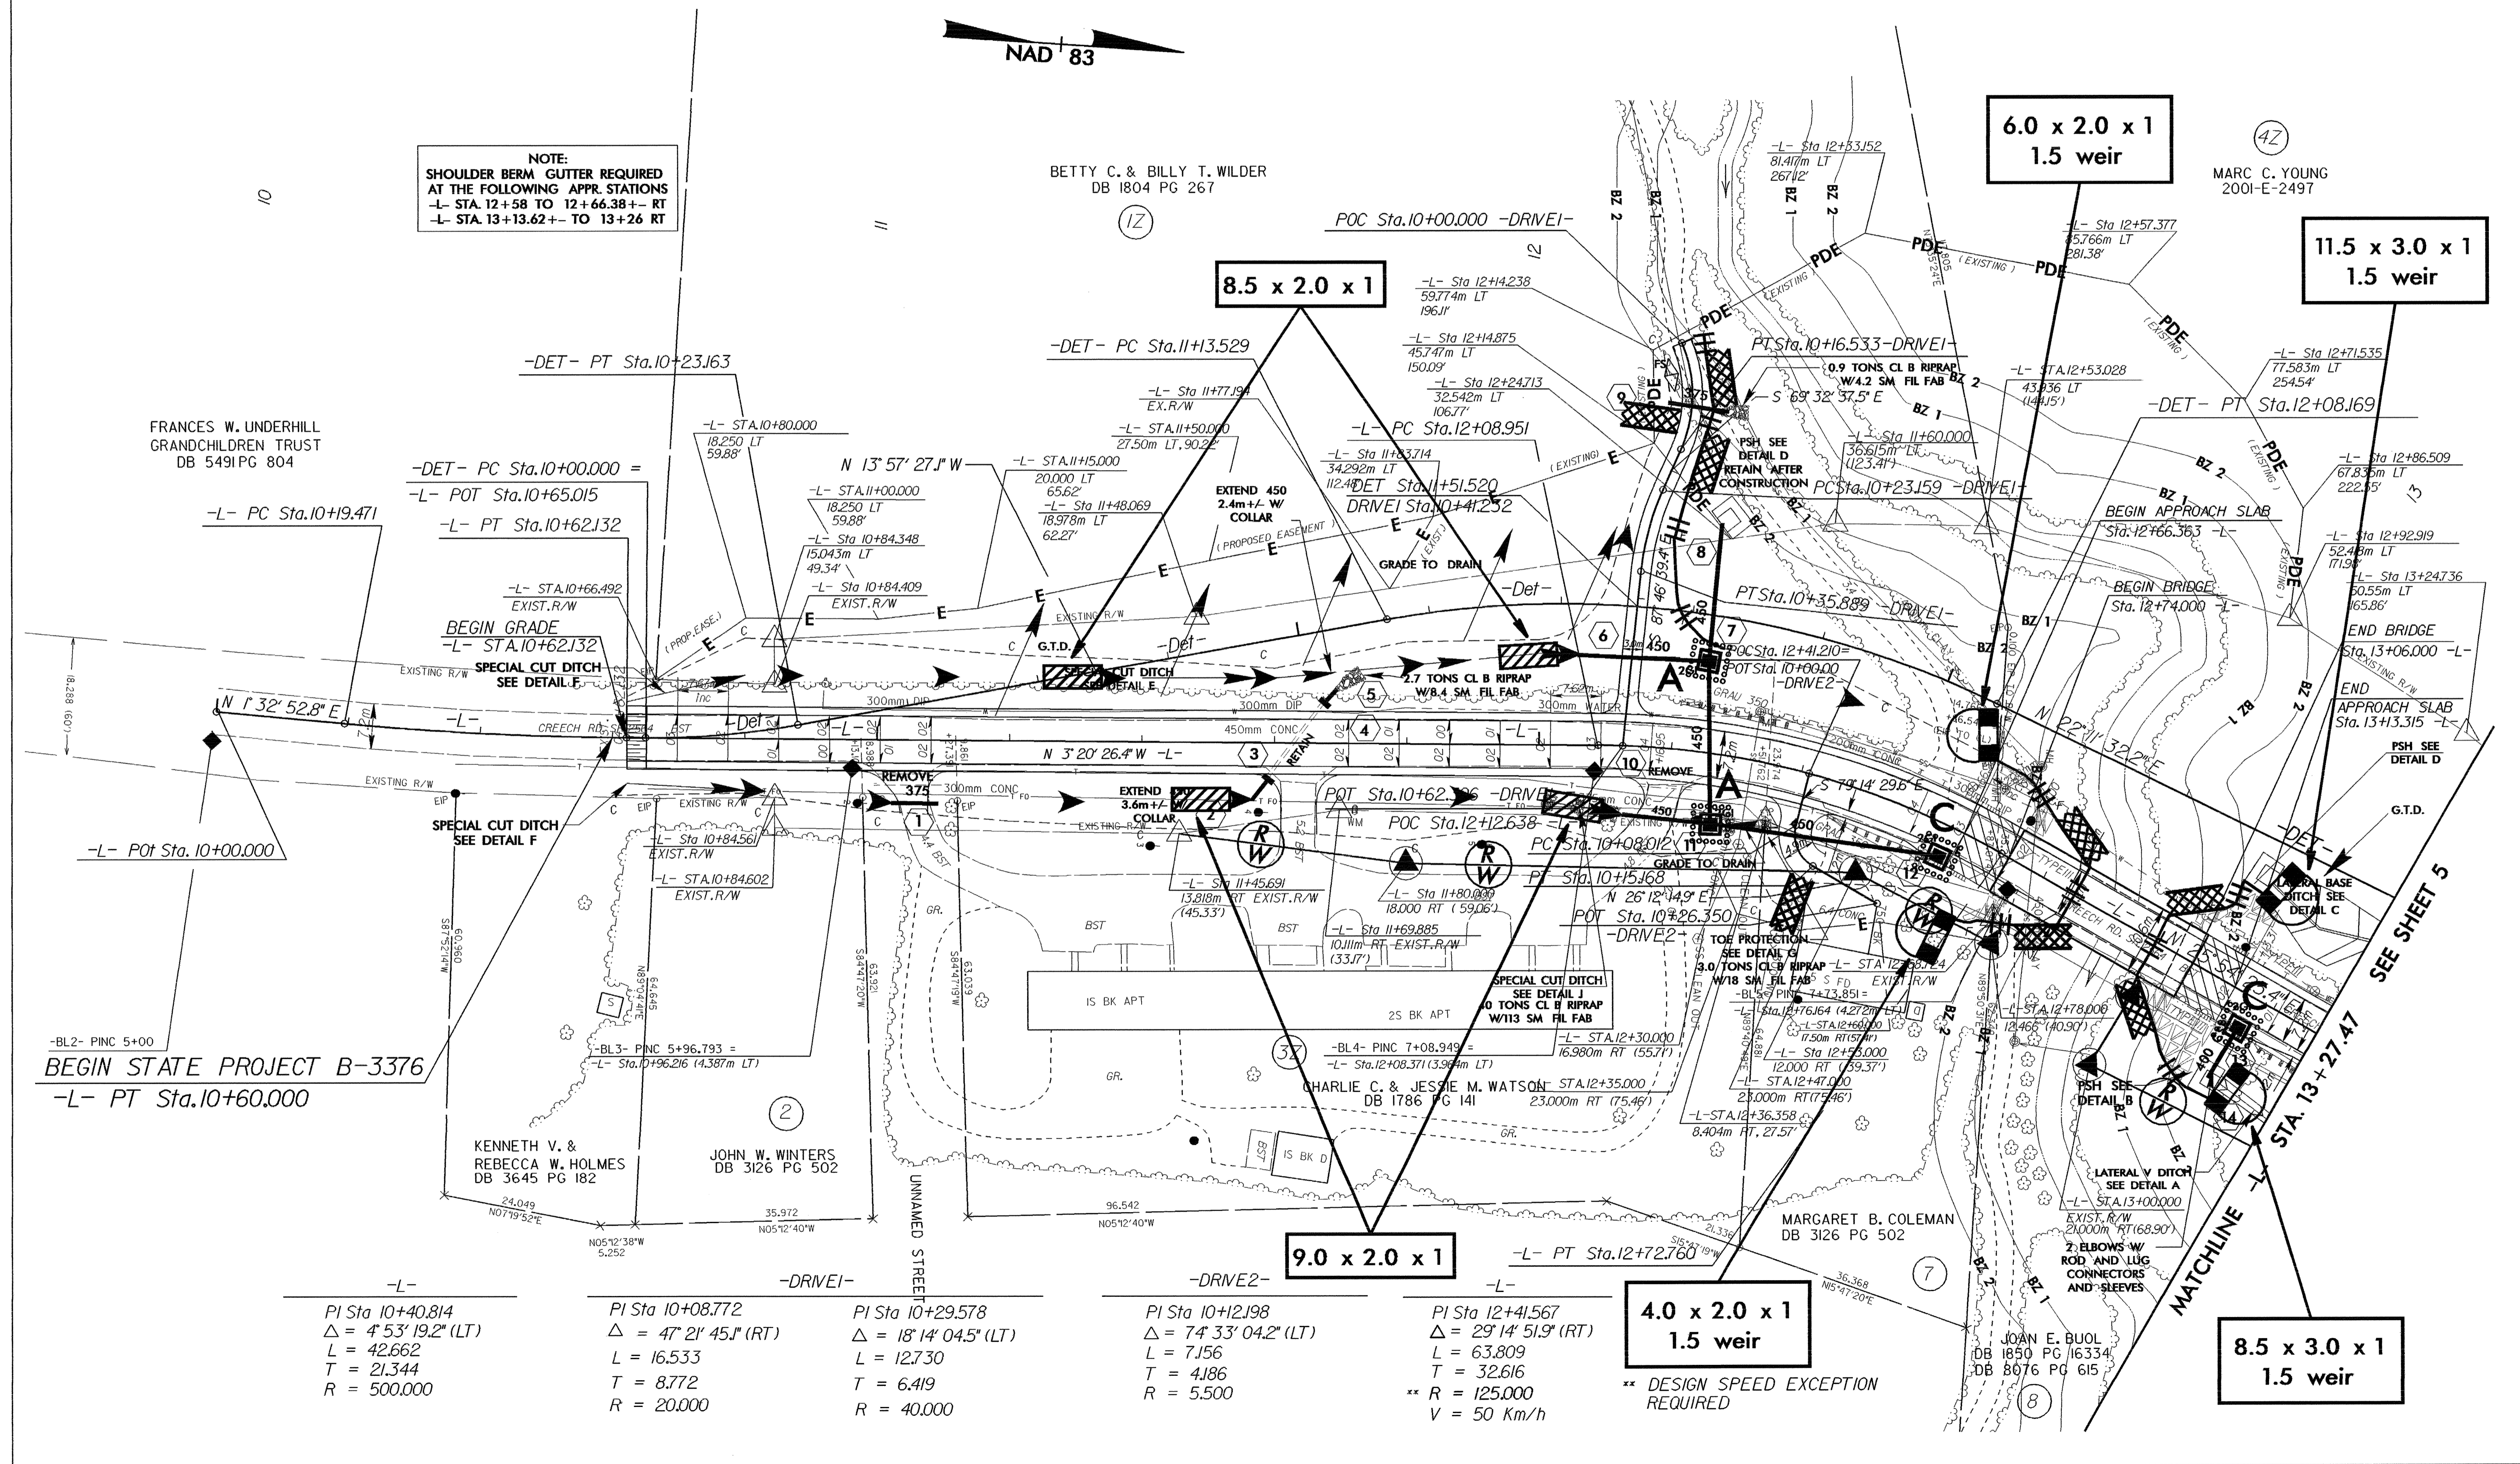

BEGIN STATE PROJECT B-3376
 -L- PT Sta. 10+60.000

-L-
 PI Sta 10+40.814
 $\Delta = 4^{\circ} 53' 19.2" (LT)$
 L = 42.662
 T = 21.344
 R = 500.000

-DRIVE1-
 PI Sta 10+08.772
 $\Delta = 47^{\circ} 21' 45.1" (RT)$
 L = 16.533
 T = 8.772
 R = 20.000

PI Sta 10+29.578
 $\Delta = 18^{\circ} 14' 04.5" (LT)$
 L = 12.730
 T = 6.419
 R = 40.000

-DRIVE2-
 PI Sta 10+12.198
 $\Delta = 74^{\circ} 33' 04.2" (LT)$
 L = 7.156
 T = 4.186
 R = 5.500

-L-
 PI Sta 12+41.567
 $\Delta = 29^{\circ} 14' 51.9" (RT)$
 L = 63.809
 T = 32.616
 ** R = 125.000
 V = 50 Km/h

4.0 x 2.0 x 1
 1.5 weir
 ** DESIGN SPEED EXCEPTION REQUIRED

8.5 x 3.0 x 1
 1.5 weir

SEE SHEET 5

MATCHLINE -L- STA. 13+27.47