



ENVIRONMENTALLY SENSITIVE AREA  
SEE PROJECT SPECIAL PROVISIONS

NOTE:  
UTILIZE TEMPORARY ROCK SEDIMENT DAM TYPE - B  
AS STILLING BASIN WHERE APPLICABLE.

NOTE:  
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE- B  
AND TEMPORARY ROCK SILT CHECKS TYPE-A AT  
DRAINAGE OUTLETS.



CONST.REV.

R /W REV.


PROJECT REFERENCE NO. SHEET NO.

B-3376 EC-5/CONST.6

R /W SHEET NO.

ROADWAY DESIGN ENGINEER HYDRAULICS ENGINEER

CLEARING AND GRUBBING  
EROSION CONTROL FOR  
CONSTRUCTION SHEET 6

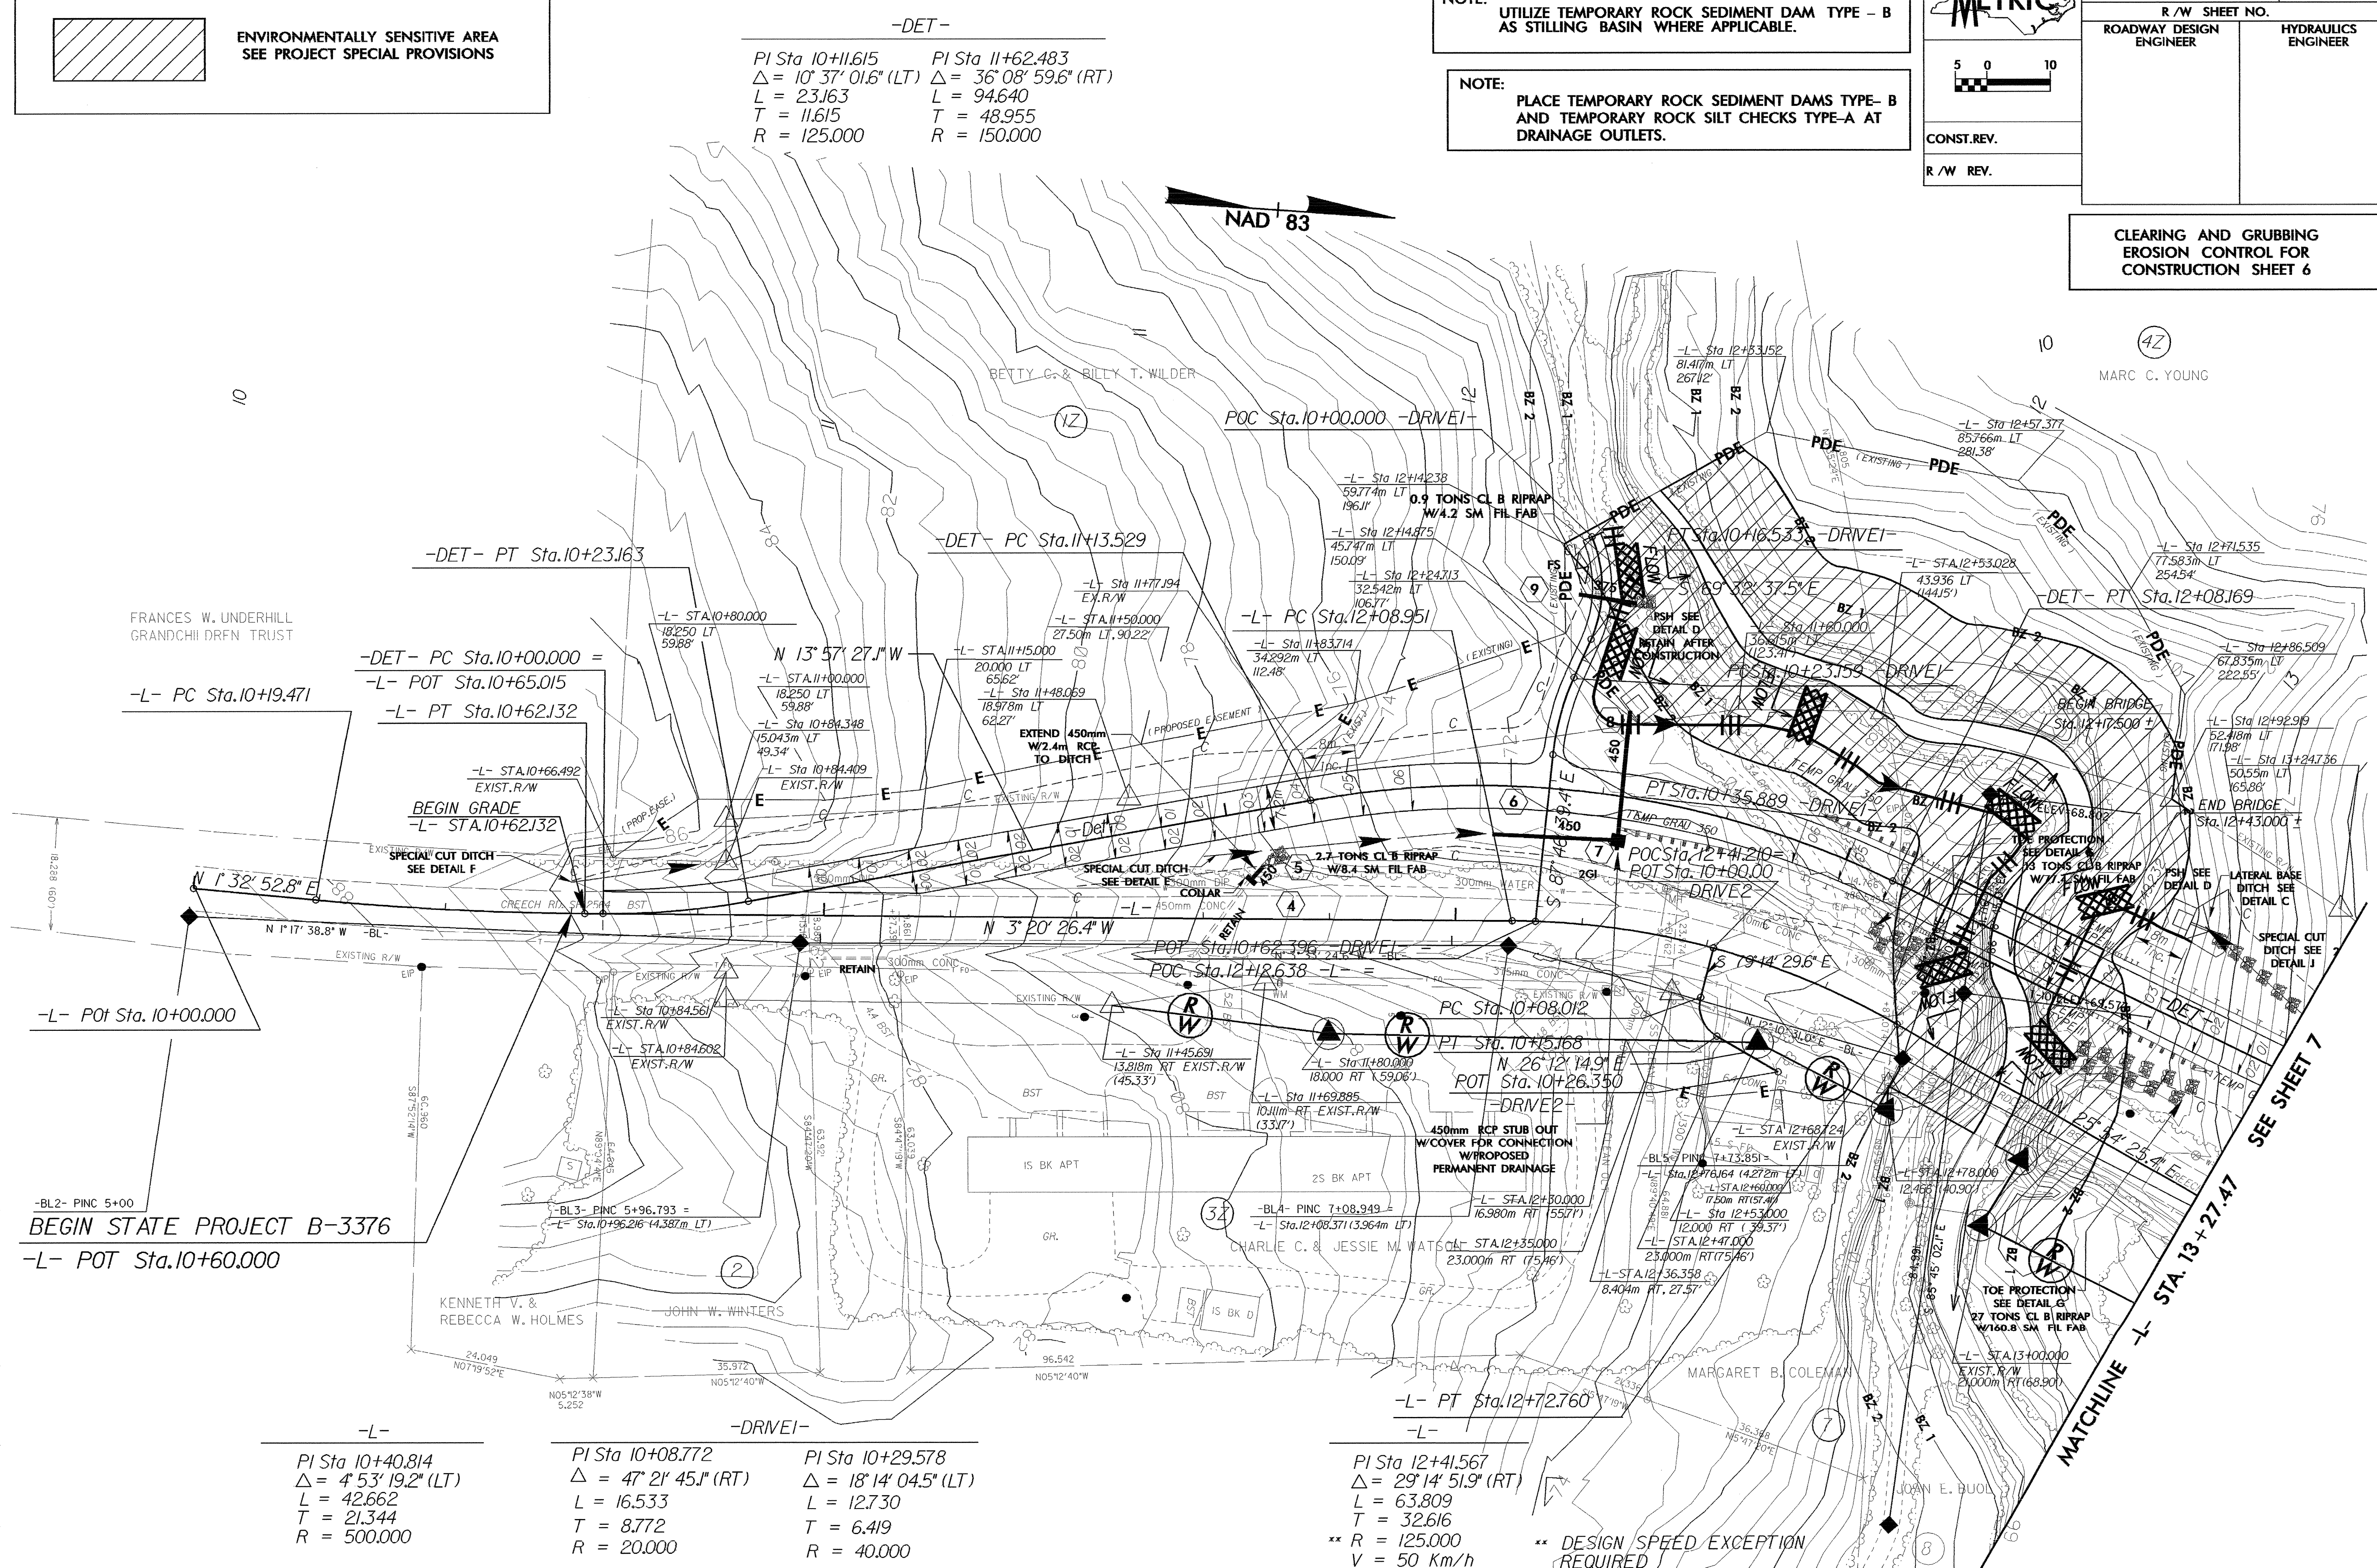

-DET-  
PI Sta 10+11.615    PI Sta 11+62.483  
Δ = 10° 37' 01.6" (LT)    Δ = 36° 08' 59.6" (RT)  
L = 23.163                    L = 94.640  
T = 11.615                    T = 48.955  
R = 125.000                  R = 150.000

NAD 83

-BL2- PINC 5+00  
BEGIN STATE PROJECT B-3376  
-L- POT Sta. 10+60.000

-L-  
PI Sta 10+40.814  
Δ = 4° 53' 19.2" (LT)  
L = 42.662  
T = 21.344  
R = 500.000

-DRIVE1-  
PI Sta 10+08.772    PI Sta 10+29.578  
Δ = 47° 21' 45.1" (RT)    Δ = 18° 14' 04.5" (LT)  
L = 16.533                    L = 12.730  
T = 8.772                    T = 6.419  
R = 20.000                    R = 40.000

-L-  
PI Sta 12+41.567  
Δ = 29° 14' 51.9" (RT)  
L = 63.809  
T = 32.616  
\*\* R = 125.000              \*\* DESIGN SPEED EXCEPTION  
V = 50 Km/h                  REQUIRED

MATCHLINE -L- STA. 13+27.47  
SEE SHEET 7